

SUNLINQ™ Portable Solar Panel - 12 Watt

SUNLINQ™ is the only solution for portable solar power for all types of outdoor needs. The SUNLINQ™ 12 Watt is ideal for hiking, camping, sporting events, on campus and at the beach.

Incorporating solid state, thin-film, PowerFLEX™ solar cells, the SUNLINQ™ 12 Watt provides an excellent choice for excursions that require lightweight, flexible, durable portable power.

Product Specifications (SP-12)


Electrical Characteristics*	
SP Product Number	SP-10
Typical Current (milliamps) at STC* (at 11V)	800
Nominal Operating Voltage	12V CLA**
Typical Power (Watts) at STC*	11
Maximum Limit for Open Circuit Voltage	15.6V
Maximum Power (Watts)	12
Thermal Characteristics	
Power (%/C)	-0.6
Voltage (%/C)	-0.6
Cell Temperature Operating Range	-40° F to 176° F / -40° C to 80° C
Dimensions and Weight	
Folded	
Length, in (mm)	9 (229)
Width, in (mm)	5 (127)
Thickness, in (mm)	.7 (17.78)
Deployed	
Length, in (mm)	29.5 (749.3)
Width, in (mm)	18 (457)
Thickness, in (mm)	0.03 (.762)
Weight	
Weight, lb (kg)	.9 (.4)
MaxPower to weight ratio watt/lb (watt/kg)	13.3 (30)

*Data at Standard Test Conditions (STC)


STC: irradiance level 1000W / m², spectrum AM 1.5 and cell temperature 25° C

**Cigarette Lighter Adapters (CLAs) typically operate best between 11V and 14.5V

TYPICAL VOLTAGE VS. CURRENT PLOT
for SP10 Module at 25C and 62C

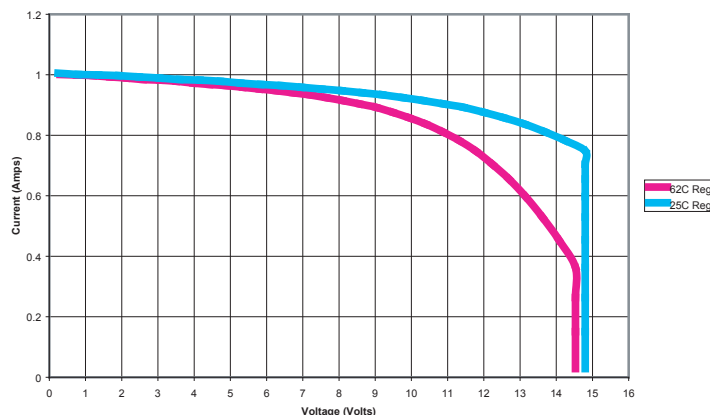

The I/V graph above shows the typical performance of the solar module at STC

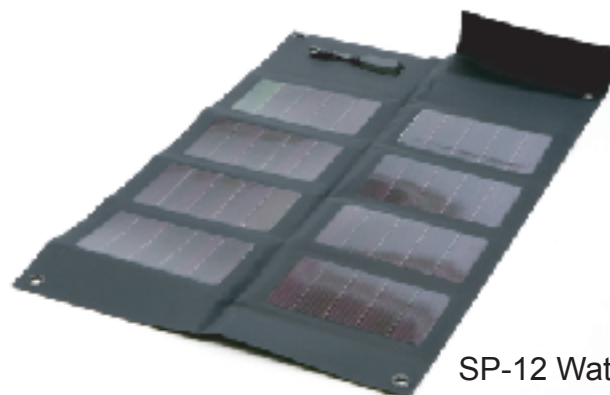

SP-12 Watt



GLOBAL SOLAR
Systems That Deliver

For product or purchasing inquiries contact:

ecodirect
CLEAN ENERGY SOLUTIONS
www.ecodirect.com