



KD 145 SX-UFU Series

KD145 SX-UFU

CUTTING EDGE TECHNOLOGY

As a pioneer with four decades of experience in the development of photovoltaic systems, Kyocera drives the market as a leading provider of PV products. We demonstrate our *Kaizen* philosophy, or commitment to continuous improvement, by setting the industry standard in the innovation of best-in-class solar energy equipment.

QUALITY BUILT IN

- UV-stabilized, anodized aluminum frame in black
- Supported by major mounting structure manufacturers
- Easily accessible grounding points on all four corners for fast installation

PROVEN RELIABILITY

- Kyocera modules confirmed by the Desert Knowledge Australia Solar Centre to have the highest average output of any crystalline module
- First module manufacturer in the world to pass long-term sequential testing performed by TÜV Rheinland
- This series construction also passed TÜV Rheinland's Salt Mist Corrosion Test at Severity Level 6, the most intense test conditions available
- Only module manufacturer to achieve the rank of "Performance Leader" in all six categories of GTM Research's 2014 PV Module Reliability Scorecard



CERTIFICATIONS

- UL1703 Certified and Registered, UL Fire Safety Class C
- Applicable to hazardous location, Class I Div. II
- NEC2008 Compliant, IEC 61215/61730, and ISO 14001
- IEC61701 Ed.2 Severity 6 (Salt Mist Corrosion Test)



ELECTRICAL SPECIFICATIONS

Standard Test Conditions (STC)

STC=1000 W/M² irradiance, 25°C module temperature, AM 1.5 spectrum*

KD 145 SX-UFU		
P_{max}	145	W
V_{mp}	17.9	V
I_{mp}	8.11	A
V_{oc}	22.3	V
I_{sc}	8.78	A
$P_{tolerance}$	+10/-0	%

Nominal Operating Cell Temperature Conditions (NOCT)

NOCT=800 W/M² irradiance, 20°C ambient temperature, AM 1.5 spectrum*

T_{NOCT}	45	°C
P_{max}	104	W
V_{mp}	16.1	V
I_{mp}	6.46	A
V_{oc}	20.4	V
I_{sc}	7.11	A

Temperature Coefficients

P_{max}	-0.46	%/°C
V_{mp}	-0.52	%/°C
I_{mp}	0.006	%/°C
V_{oc}	-0.36	%/°C
I_{sc}	0.06	%/°C

Operating Temp	-40 to +90	°C
----------------	------------	----

System Design

Series Fuse Rating	15 A
--------------------	------

Maximum DC System Voltage (UL)	600 V
--------------------------------	-------

Hailstone Impact	in (25mm) @ 51mp (23m/s)
------------------	--------------------------

*Subject to simulator measurement uncertainty of +/- 3%.
KYOCERA reserves the right to modify these specifications without notice.

CERTIFIED IEC61215 ED2 IEC61730 BY JET

NEC 2008 COMPLIANT
UL 1703 LISTED
122215




WARNING: Read the instruction manual in its entirety prior to handling, installing & operating Kyocera Solar modules.

MODULE CHARACTERISTICS

Cells per module:	36 (4 x 9)
Dimensions: length/width/height	59.06in/26.30in/1.81in (1500mm/668mm/46mm)
Weight:	27.6lbs (12.5kg)

PACKAGING SPECIFICATIONS

Modules per pallet:	20
Pallets per 53' container:	54
Pallet box dimensions: length/width/height	63.19in/27.56in/49.02in (1605mm/700mm/1245mm)
Pallet box weight:	632.8lbs (287kg)

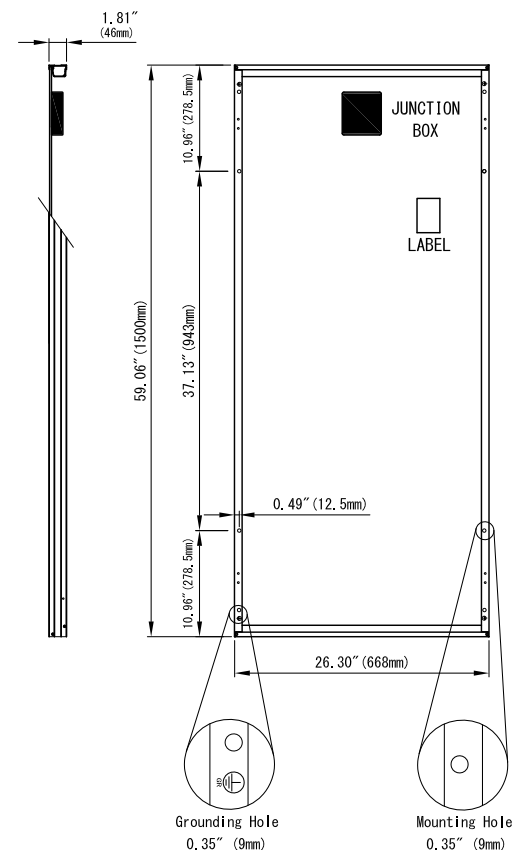

FRAME CROSS SECTION DIAGRAM

