



EnduraLED PAR38 Indoor Flood

17PAR38/END/F22 4000 DIM 6/1

Philips EnduraLED PAR indoor reflectors with high brightness LEDs are suited for track and recessed lighting. Energy saving, long life LED PAR lamps install into existing fixtures and can lower cost with reduced wattage and re-lamping frequency.

Product data

• General Characteristics

Cap-Base	-
Bulb	PAR38 [PAR38 mm]
Rated Avg. Life (Hours)	45000 hr

• Light Technical Characteristics

Color Code	CW
Color Designation	Cool White
Beam Angle	22 D
Beam Description	22D [Medium beam]
Correlated Color Temperature	4200 K
Approximate Lumens	1120 Lm
Approx. MBCP	4300 cd
Color Temp. (Kelvin)	4180 K [CCT 4180K]

• Electrical Characteristics

Wattage	17 W
---------	------

Wattage Technical	17 W
Voltage	120 V
Dimmable	Yes


• Product Dimensions

Overall Length C [inch]	5.319 (max) in
-------------------------	----------------

• Product Data

Product number	410191
Full product name	17PAR38/END/F22 4000 DIM 6/1
Short product name	17PAR38/END/F22 4000 DIM 6/1
Pieces per Sku	1
eop_pck_cfg	6
Skus/Case	6
Bar code on pack	46677410193
Bar code on case	50046677410198
Logistics code(s)	929000176302
eop_net_weight_pp	0.528 kg

Dimensional drawing

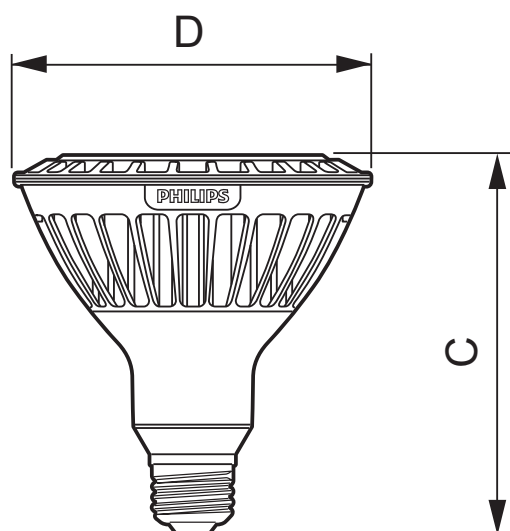

17W/18W, E27, PAR38, dimmable

Product	C (Norm)	D (Norm)
LED 17W CW 4180K 120V PAR38 Dimmable	-	-

For product and purchase inquiries contact:

ecoDIRECT
CLEAN ENERGY SOLUTIONS
www.ecodirect.com



© 2012 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2012, February 6
data subject to change