



Product Information Sheet

Solar Module

BSP120-12

General Information

High performance multi-crystalline cells
High energy yields in a wide variety of climates
Anodized aluminum frame provides for easy mounting

Qualification and Certificates

UL Listing Pending

Electrical Characteristics



Typical Data At STC		
		BSP120-12
Rated Power	Pr	120W
Peak Power	Pmpp	120W
Peak Power Voltage	Vmpp	17.39V
Peak Power Current	I _{mp}	6.93A
Open Circuit Voltage	Voc	21.6V
Short Circuit Current	Isc	7.62A

The performance of the solar cells is measured at Standard Test Conditions (STC): 1000 W/m² irradiance, AM 1.5 spectrum and 25° C cell temperature.



Physical Characteristics

Length	Inches (mm)	57.52 (1461)
Width	Inches (mm)	25.83 (656)
Thickness	Inches (mm)	1.33 (33.8)

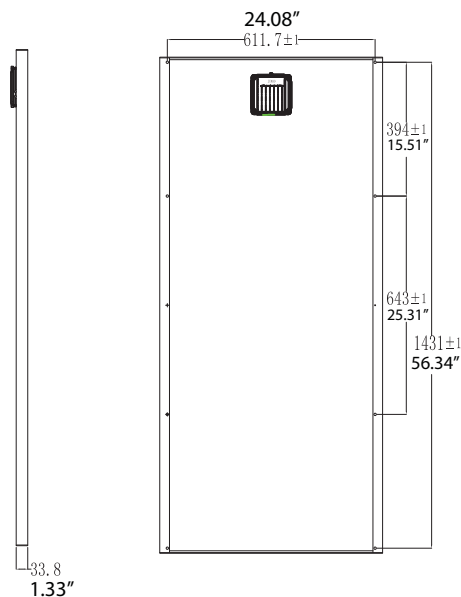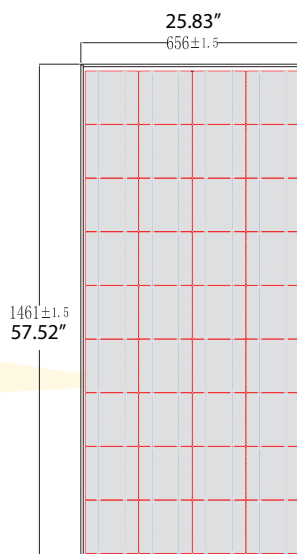

For product and purchase inquiries contact:

ecodirect

CLEAN ENERGY SOLUTIONS
www.ecodirect.com