



Product Information Sheet

Solar Module

BSP-2012

General Information

High performance multi-crystalline cells
High energy yields in a wide variety of climates
Anodized aluminum frame provides for easy mounting

Qualification and Certificates

UL Listing Pending

Electrical Characteristics

Typical Data At STC

		BSP-2012
Rated Power	Pr	20W
Peak Power	Pmpp	20W
Peak Power Voltage	Vmpp	17.3V
Peak Power Current	I _{mp}	1.20A
Open Circuit Voltage	Voc	21.7V
Short Circuit Current	Isc	1.30A


The performance of the solar cells is measured at Standard Test Conditions (STC): 1000 W/m² irradiance, AM 1.5 spectrum and 25° C cell temperature.

Physical Characteristics

Length	Inches (mm)	27.48 (698)
Width	Inches (mm)	20.94 (532)
Thickness	Inches (mm)	1.33 (33.8)

Cable Type	18/2	
Cable Length	feet (cm)	15.0 (457.2)

5 Year Warranty

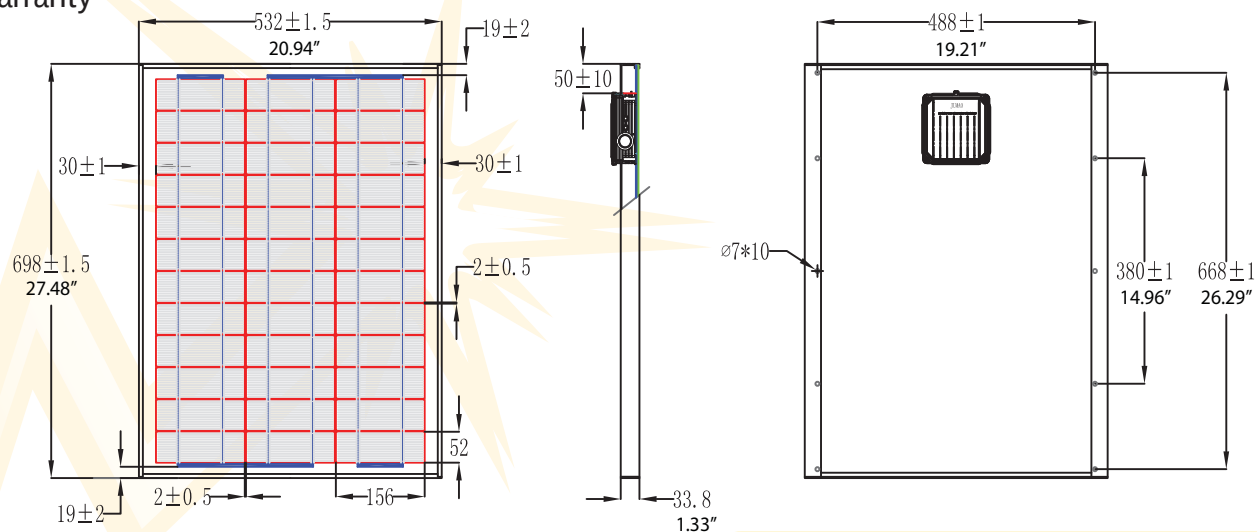

BSP-2012
20 Watt Module

For product and purchase inquiries contact:

ecoDIRECT

CLEAN ENERGY SOLUTIONS

www.ecodirect.com