



Preliminary Product Information Sheet Solar Module PowerUp 2

General Information

High performance multi-crystalline cells
High energy yields in a wide variety of climates
Anodized aluminum frame provides for easy mounting

Qualification and Certificates

UL Listing Pending



**Power Up
2 Watt Module**

Electrical Characteristics

Typical Data At STC


		PowerUp 2
Rated Power	Pr	2.5W
Peak Power	Pmpp	2.5W
Peak Power Voltage	Vmpp	17.0V
Peak Power Current	I _{mp}	0.15A
Open Circuit Voltage	Voc	21.0V
Short Circuit Current	Isc	0.17A

The performance of the solar cells is measured at Standard Test Conditions (STC): 1000 W/m² irradiance, AM 1.5 spectrum and 25° C cell temperature.

Physical Characteristics

Length	Inches (mm)	9.38 (238)
Width	Inches (mm)	6.13 (156)
Thickness	Inches (mm)	0.63 (16)

Cable Type	18/2	
Cable Length	feet (cm)	10.00 (305)

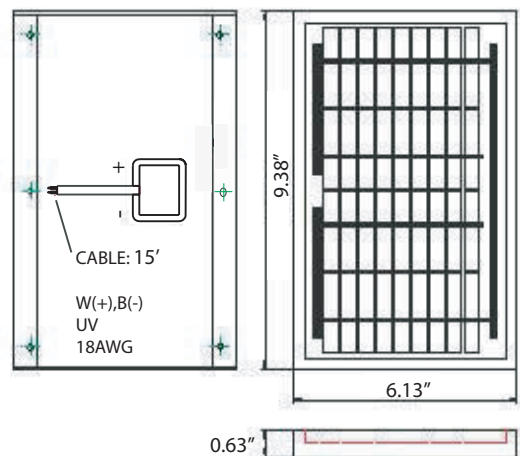

10 Year Warranty

For product and purchase inquiries contact:

ecoDIRECT

CLEAN ENERGY SOLUTIONS

www.ecodirect.com