



Preliminary Product Information Sheet Solar Module PowerUp 30

General Information

High performance multi-crystalline cells
High energy yields in a wide variety of climates
Anodized aluminum frame provides for easy mounting

Qualification and Certificates

UL Listing Pending

Electrical Characteristics		
Typical Data At STC		
		PowerUp 30
Rated Power	Pr	30W
Peak Power	Pmpp	30W
Peak Power Voltage	Vmpp	18.0V
Peak Power Current	I _{mp}	1.67A
Open Circuit Voltage	Voc	22.1V
Short Circuit Current	Isc	1.80A

The performance of the solar cells is measured at Standard Test Conditions (STC): 1000 W/m² irradiance, AM 1.5 spectrum and 25° C cell temperature.

Physical Characteristics		
Length	Inches (mm)	26.2 (666)
Width	Inches (mm)	16.2 (412)
Thickness	Inches (mm)	1.31 (33)


Cable Type	18/2	
Cable Length	feet (cm)	15.75 (480)

10 Year Warranty

For product and purchase inquiries contact:

ecoDIRECT

CLEAN ENERGY SOLUTIONS
www.ecodirect.com

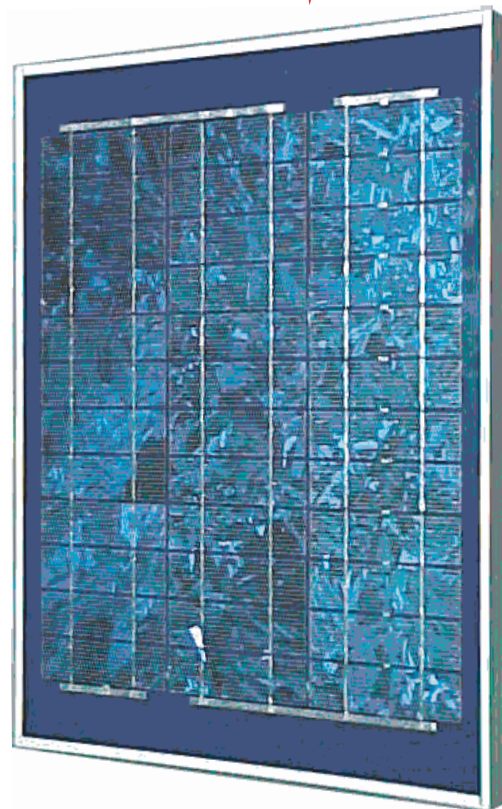

**Power Up
30 Watt Module**

