



Product Information Sheet

Solar Module

BSP80-12

General Information

High performance multi-crystalline cells
High energy yields in a wide variety of climates
Anodized aluminum frame provides for easy mounting

Qualification and Certificates

UL Listing Pending

Electrical Characteristics



Typical Data At STC		
		BSP80-12
Rated Power	Pr	80W
Peak Power	Pmpp	80W
Peak Power Voltage	Vmpp	17.86V
Peak Power Current	I _{mp}	4.50A
Open Circuit Voltage	Voc	21.96V
Short Circuit Current	Isc	5.06A

The performance of the solar cells is measured at Standard Test Conditions (STC): 1000 W/m² irradiance, AM 1.5 spectrum and 25° C cell temperature.



Physical Characteristics

Length	Inches (mm)	47.32 (1202)
Width	Inches (mm)	21.1 (536)
Thickness	Inches (mm)	1.33 (33.8)

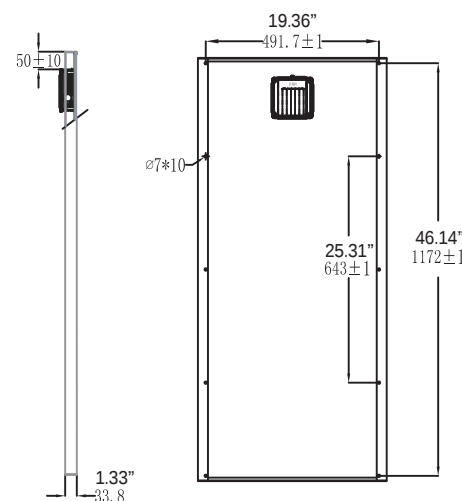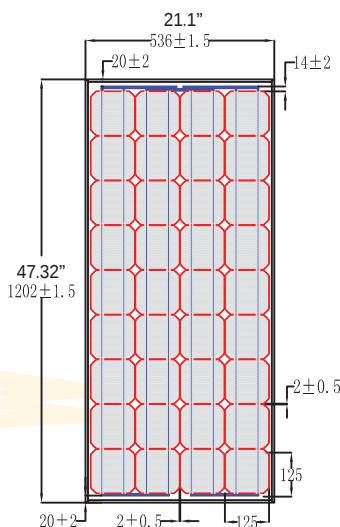

For product and purchase inquiries contact:

ecodirect

CLEAN ENERGY SOLUTIONS

www.ecodirect.com