

**Third Party
Lab Tested**

4,500 lbs Side Axial load
1,100 lbs Uplift load
Waterproof Tested

TileTrac®

Patent #5,746,029



Tile Roof Structural Attachment NEW STAINLESS STEEL TILE FLASHING

The patented TileTrac® attachment allows for a structural roof rafter connection with optimal attachment stud location adjustability. Design results in the best looking systems in the industry.



*TileTrac® for s-curve
concrete tile
(6" Tall Threaded Stud)*

Part # TT-18-T6



*TileTrac® for flat
concrete tile
(4" Tall Threaded Stud)*

Part # TT-18-T4




Benefits of TileTrac®

- Easiest and lowest cost waterproof tile roof attachment
- Over 15 years of industry preferred single lag bolt design
- 3rd party lab waterproof and load tested
- Compression sealed at underlayment and top of tile
- Includes Stainless Steel tile flashing and Stainless Steel lag bolt
- Aluminum and Stainless Steel components for maximum corrosion resistance and strength
- Large roof surface contact area evenly distributes load


The TileTrac® Design

Structurally attaches to roof rafter and allows the rail attachment stud to be located at the strongest point of the tile (the crown) where water does not flow.

Without TileTrac®

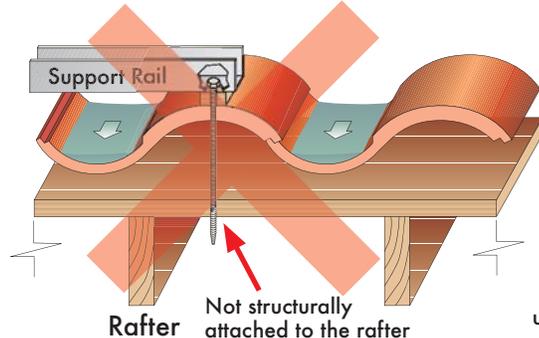

With TileTrac®

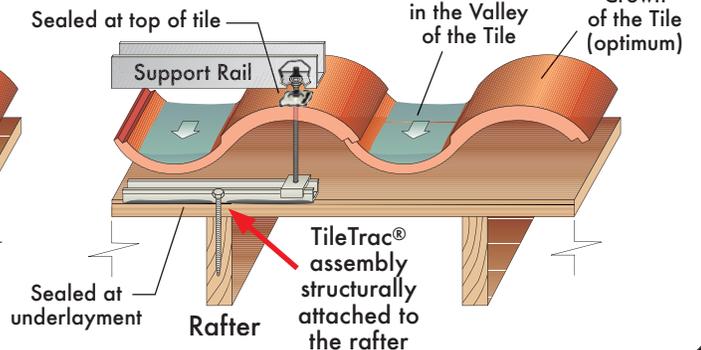

professional
SOLAR
products inc.

(805) 486-4700

(805) 486-4799 - fax
1551 S. Rose Ave.
Oxnard, CA 93033

View more info on our
website at:

www.prosolar.com


Installation steps for both s-curve and flat concrete tile*




STEP 1: Select a tile in the area of the roof rafter.




STEP 2: Remove the tile by pushing and pulling. It is usually held in place by a small nail.

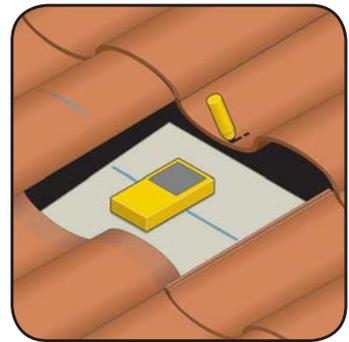


STEP 3: Using an electronic stud finder (recommended), or other means, locate the rafter center. Mark a reference point on the tile above.

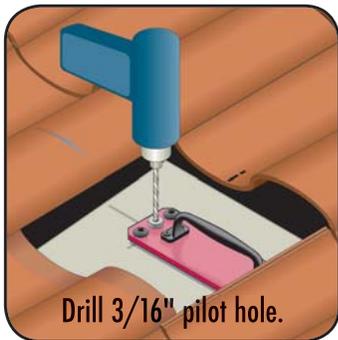

Step 4: Seal the initial tile nail hole. Using a 3/16" drill bit and drill guide (FJ-Drill), drill pilot hole along the rafter center

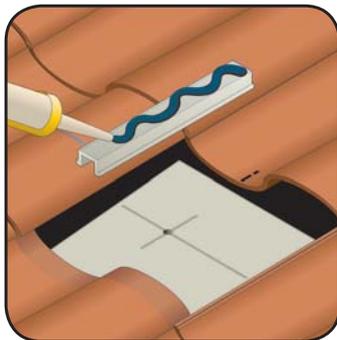

Step 5: Insert the lag bolt and washer through the TileTrac® and apply fresh compatible sealant to the base.

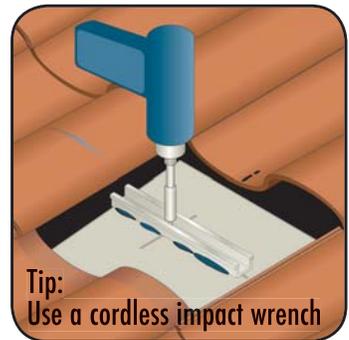


Step 6: Using a 1/2" socket, install the lag bolt until seated. Do not overtighten. The sealant should flow outward sealing any holes.




Step 7: After bolting the base to the roof, slide the upper carriage into the correct position under the crown of the tile. For Flat tile, slide the upper carriage near the middle of the tile.




Step 8: Replace the tile by lining up the snap lines and mark the drill location accordingly.

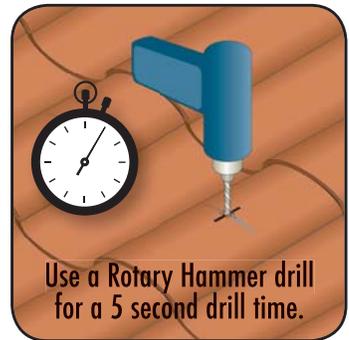


Step 9: Using a 1/2" carbide drill bit and ROTARY HAMMER DRILL in hammer mode, drill through the tile. See online video at www.prosolar.com for details.

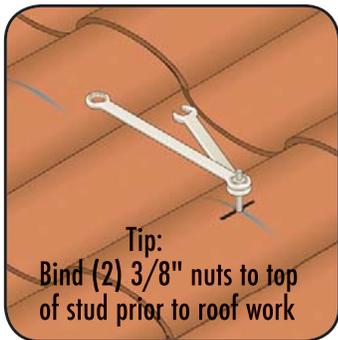

Step 10: Insert threaded stud through tile and hand-tighten to engage with base. Bind two 3/8" nuts (included) using 9/16" wrenches and tighten.

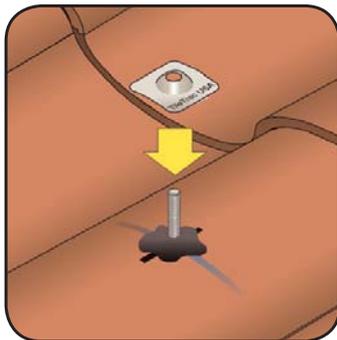

Step 11: Unbind nuts and remove from stud. Apply sealant around stud at tile opening and compress with Stainless Steel flashing (included) until seated.

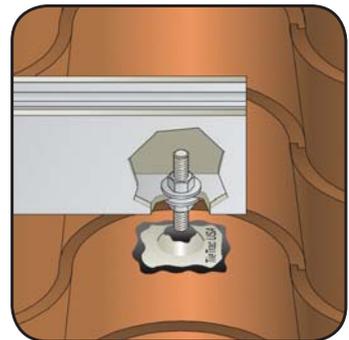

Step 12: Fasten rail with lower and upper 3/8" nuts/washers as shown.

*Not recommended for clay or slate tiles.