



.32 DIA TYP
[8]
(4 HOLES)

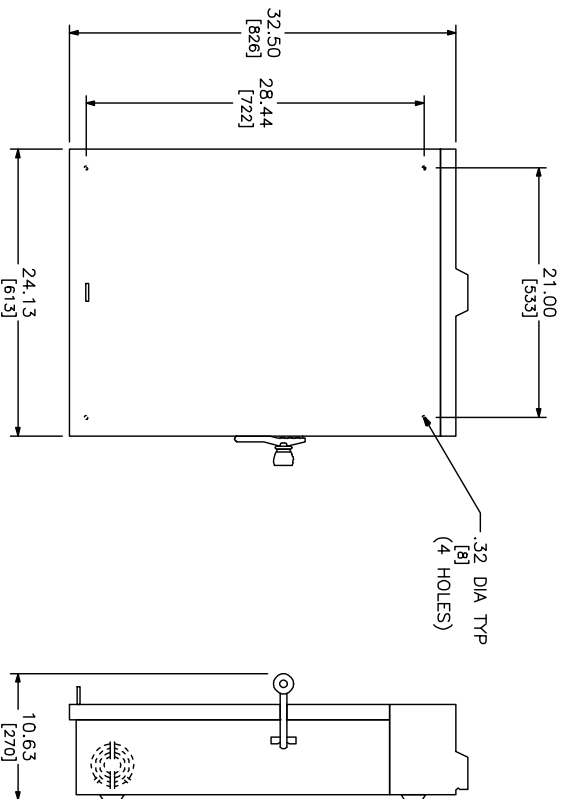

NEMA TYPE 3R
ILLUSTRATED



WIRING DIAGRAMS

TERMINAL LUGS			
AMPERES	MAX. WIRE	MIN. WIRE	TYPE
200	300 KCML	# 6 AWG	AL/CU

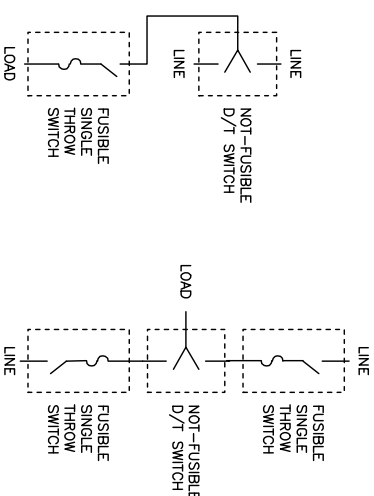


DIAGRAM 1

DIAGRAM 2

DIAGRAM 1 AND 2 ILLUSTRATE METHODS OF APPLYING
FUSES TO DOUBLE THROW SWITCHES WHEN REQUIRED.

DUAL DIMENSIONS: INCHES
MILLIMETERS

CATALOG NUMBER	VOLTAGE RATINGS	WIRING DIAG.	HORSEPOWER RATINGS	KNOCKOUTS ♦	
				TOP & BOTTOM	LEFT SIDE
DTU324NRB	240VAC	A	15 - 3Ø	(1) 1.25,1.50,2.00,2.50 (2) 1.50,2.00	(1) 1.00,1.50,2.00,2.50

NOTES:
FINISH - GRAY BAKED ENAMEL
UL LISTED - FILE E-2875 CSA CERTIFIED - FILE # UL-89067
SUITABLE FOR USE AS SERVICE EQUIPMENT IN THE U.S.
SHORT CIRCUIT CURRENT RATING:
10,000 AMPERE WHEN PROTECTED BY CLASS H OR K FUSES.
82,000 AMPERE WHEN PROTECTED BY CLASS H, QUICK-MAKE, QUICK-BREAK.
♦ TOP OF NEMA TYPE 3R DEVICES HAVE PROVISIONS FOR MAXIMUM 2.50/[64] BOLT-ON HUB.

DOUBLE THROW SAFETY SWITCHES
200 AMPERE
ENCLOSURE - NEMA TYPE 3R RAINPROOF



DWG # 2198
NO.