









The advanced design of the **SimpliPHI**<sup>\*\*</sup> **6 kW Hybrid Inverter** offers versatile applications that seamlessly integrate solar, generator and/or grid power in both AC and DC coupled configurations — on-grid or off. This smart hybrid inverter with integrated MPPT can also be easily coupled to work with the SimpliPHI 4.9 kWh battery to provide an efficient, easy-to-use energy storage system for any home or business that can allow for Time-of-Use applications, peak demand shaving, backup power and peace of mind. In addition, the SimpliPHI Hybrid Inverter can be paired with other batteries.

#### **FEATURES**



## **Scalable for any application**

Scalable up to 9 inverters for a total of 54 kW of power.



# Off-grid and grid-connected systems

Simple installation for both AC coupled retrofit and new DC coupled systems.



# **Versatile installation options**

IP65 rating supports all weather conditions for both indoor or outdoor installations.



#### **Warranty coverage**

10-year limited warranty.1



## **Seamless transition**

Less than 8 milliseconds of seamless transition protects sensitive electronics and minimizes downtime.



#### Simple digital interface

Easy programming and monitoring of primary system functions on the LCD inverter interface.



#### EnergyTrak<sup>™</sup> enabled

Peace of mind that your system is working optimality with remote monitoring all from an app.



# SIMPLIPHI\* Hybrid Inverter





Inverter Specifications		
Model Number	SPHI-IN-6	
Battery Input Voltage	48VDC	
Safety Features	Rapid shutdown, Arc fault protection, PV reverse polarity protection, Ground fault monitoring, Residual current monitoring, Insulation resistor detection, Overcurrent protection, Short circuit protection	
Rapid Shutdown Capable	Integrated Transmitter	
Maximum Paired Solar (DC Input)	7.5 kW	
Integrated MPPT Charge Controllers	2 inputs with 2 strings each	
Loads Supported	120/240VAC	
Maximum Continuous Power	6,000 VA	
Maximum Output Power	6 kW	
Instantaneous Power (100ms)	12,000 VA	
Surge Power (5s)	9,000 VA	

Product Dimensions	
Dimensions (W x H x D)	20.28 x 27.55 x 8.50 in (515 x 700 x 215.5 mm)
Weight	86 lb (39 kg)
Back Panel Dimensions (W x H x D)	20.07 x 14.9 x 1.2 in (509.7 x 378.4 x 30.4 mm)

Inverter Specifications	
CEC Weighted Efficiency	96.5%
Parallel Stacking	9 Inverters
Warranty Period	10-Year Limited Warranty <sup>1</sup>
Battery Compatibility	Lithium-ready
Automatic Generator Start	Included
Monitoring	Briggs & Stratton EnergyTrak
Certifications	UL 1741 SA/SB, IEEE 1547.1-2020, IEC/EN 62109-1&2, EN 61000-6-2&3, EN 61000-3-11&12

Applications			
Residential Grid-Tied TOU / Peak Shaving			
Residential Grid-Tied Backup			
Residential Grid-Tied Net Zero (solar and battery is primary)			
Batteryless Operation- Residential Grid-Tied PV			
Residential Off-Grid			
Small Business / Commercial	Single and Split Phase: 120/240		

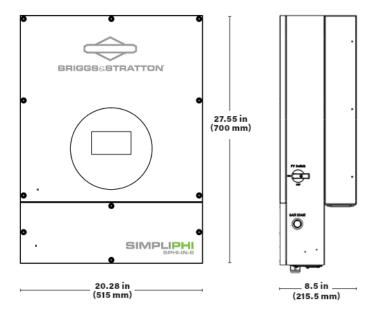

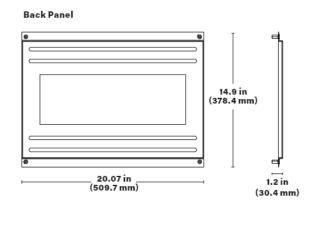

'See operator's manual or BRIGGSandSTRATTON.com for complete warranty details. All specifications listed are typical/nominal and subject to change without notice.

BRIGGS & STRATTON POST OFFICE BOX 702 MILWAUKEE, WI 53201 USA