



Hydra-Zorb® Strut Mounted Cushion Clamps for Metric Pipe


Product Guide

Hydra-Zorb Cushion Clamps (the original cushioned strut clamp), secure tube and pipe runs against damage from shock, movement, and vibration, eliminating metal to metal contact.

Since their invention in 1966, our clamps have been used for decades in the Plumbing, Hydraulics, Pneumatics, HVAC/Refrigeration, Car Wash, Brewing, and Paint Processing/Food Processing Industries, and are ideal for any application where damage from pipe is a concern.

Key Features

- UL Classified 2043 (25/50) for use in plenums and air handling systems.
- Clamps are 1008-1010 carbon steel.
- Eliminate shock and vibration.
- Resist most fuels, oils, gases, greases, solvents, mineral acids and other harsh materials.
- Allow fluid conductors to be added or removed from installations without disturbing adjacent lines.
- Assembled or disassembled with a single hand or power wrench for fast and simple installation.
- Permit various size lines to be mixed to suit installation.
- All metal components have a Trivalent (non-hex) plating.
- Available in 304 and 316 stainless steel and aluminum (special order).
- Available for metric sizes from 6mm to 200mm.
- Molded with high strength Thermoplastic Elastomer (TPE).
- Temperature rating: -65°F to +275°F

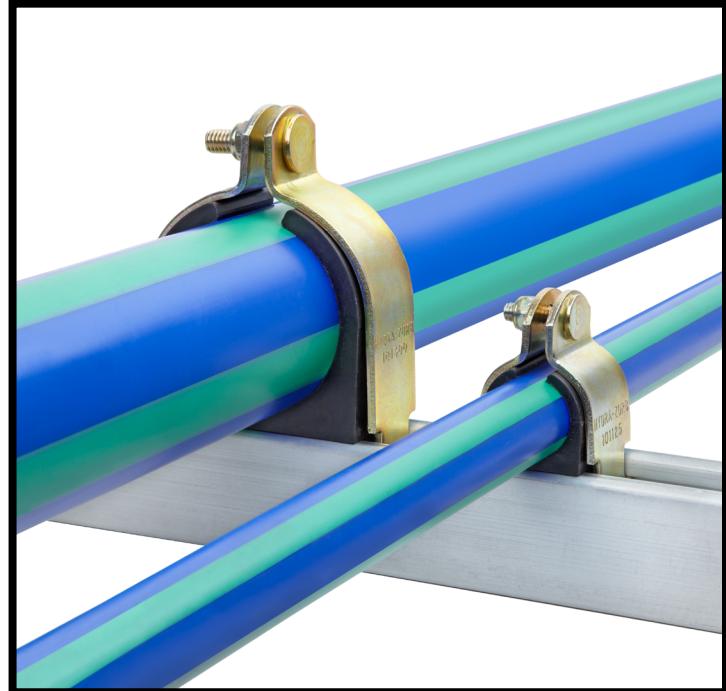

Use Recommendations

1. Clamps should be spaced no more than 60 diameter apart or a maximum of 5 feet.
2. All tube, pipe and hose lines are to be secured with clamps and anchoring channel or other similar approved equal method.
3. Only one man and one tool needed for assembly after base channel is in place.

Hydra-Zorb strut mounted cushion clamp assemblies include strut clamps with welded fastener, cushion and locknut.



UL Standard 2043, 2nd Edition:
"Fire Test for Heat and Visible Smoke Release
for Discrete Products and Their Accessories
Installed in Air-Handling Spaces."