

With all of the options, how do you pick the right industrial masking tape for your job?


Length, width, colour, thickness, adhesion, strength: when it comes to industrial masking tapes, the options are almost endless. We know it can be overwhelming to understand the differences between them - and the impact they will have on your job.

That's why we've
made masking
simple.



5

**Five tapes.
Five colours.
Five levels
of performance.**

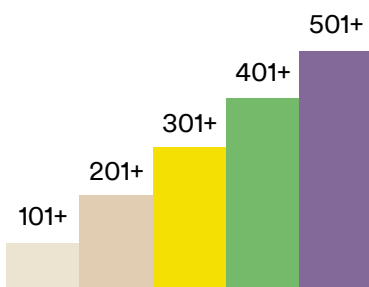

We have refined a broad range of industrial masking needs into a single line of easy-to-choose tapes. Ranging from 101+ to 501+, each product level offers an increasing level of performance – from basic, everyday jobs to specialised, demanding applications.

From the Inventors of
Masking Tape



Since 1925.

We invented masking tape almost a century ago. In the time since, we have continued to evolve the technology in our products based on your needs. Today we're proud to help you explore new and better ideas.



**3M™
Value
Masking Tape**

101+

**3M™
General Use
Masking Tape**

201+

**3M™
Performance
Yellow Masking
Tape**

301+

**3M™
High
Performance
Green Masking
Tape**

401+

**3M™
Specialty High
Temperature
Masking Tape**

501+

**For light duties
you don't take
lightly.**

**For everyday
jobs that need
some extra
gusto.**

**For jobs between
tough and typical.**

**For paint jobs
worth envying.**

**For paint jobs
that demand
royal treatment.**

Use our lightest colour for your lightest jobs. This tape is ideal for indoor, light-duty applications like marking, temporary holding, and wrapping.


This tape is a little darker and a little stronger. Use it for indoor, light-to-medium duty applications, like bundling, labeling and identifying.

This tape is designed for tasks that are somewhere in the middle. Use it for paint masking in temperatures up to 107°C for 30 minutes, as well as industrial strength bundling, holding and colour coding.

Use this tape to create super sharp paint lines – even for two-tone colour applications. It sticks confidently, resists bleed-through, and removes cleanly, in temperatures up to 121°C for 30 minutes.

Use this tape for high temperature paint baking, fascia painting, and pipe coating applications in temperatures up to 149°C for 30 minutes. It is designed to stick confidently, resist bleed-through and remove cleanly for your most complex composites, under your most critical conditions.

Find your industrial masking tape.

	101+	201+	301+	401+	501+
					
JOB DUTY	Light	Light - Medium	Medium	Heavy	Heavy
PAINT	No	No	Yes	Yes	Yes
TEMPERATURE	Low 66°C	Low 93°C	Moderate 107°C	High 121°C	High 149°C
CONFORMABILITY	Low	Fair	Good	Excellent	Best
BEST SUITED FOR	Marking, Wrapping, temporary holding	Bundling, Labeling, identifying	Paint masking, bundling, holding, colour coding	High performance paint masking, including two tone paint	High temperature paint baking, fascia painting and pipe coating applications

Learn how we've made masking simple,
www.maskingmadesimpleglobal.com



3M Australia Pty Ltd
Industrial Adhesives and Tapes Division
 Bldg A, 1 Rivett Road
 North Ryde NSW 2113

Phone 136 136 (Option 2)
 Email 3mindustrialau@mmm.com
 Web www.3m.com.au/maskingmadesimple

3M New Zealand Ltd
Industrial Adhesives and Tapes Division
 94 Apollo Drive, Rosedale
 Auckland 0632

Phone 09 477 4040
 Email 3mzntb@mmm.com
 Web www.3m.co.nz/maskingmadesimple

3M is a trademark of 3M Company.
 Please recycle. Printed in Australia.
 © 3M 2016. All rights reserved.
 AV011456074