Model: PLFY-P48NEMU-E

Job Name:	
System Reference:	Date:



GENERAL FEATURES:

- New Square Edge, Sleek Design
- New 3D Turbo Fan Enabling Increased Airflow.
- Improved Installation Features
- Four Fan Speed Settings
- Auto Fan
- Corner Pocket Design For Simplified Installation
- Built In Condensate Lift Mechanism; Lifts To 33-7/16”
- Ventilation Air Intake Supported

ACCESSORIES:

Air Outlet Shutter Plate (3 pieces) (PAC-SJ37SP-E)
High Efficiency Filter (PAC-SH59KF-E)
CN24 Relay Kit (CN24RELAY-KIT-CM3)
Wireless Signal Receiver (PAR-SR3LA-E)
Multi Function Casement (PAC-SJ41TM-E)

SPECIFICATIONS:

Capacity*		
Cooling	Btu/h	48,000
Heating	Btu/h	54,000

*Cooling / Heating capacity indicated at the maximum value at operation under the following conditions:
Cooling | Indoor: 80° F (26.7° C) DB / 67° F (19° C) WB, Outdoor 95° F (35° C) DB
Heating | Indoor: 70° F (21.1° C) DB, Outdoor 47° F (8.3° C) DB / 43° F (6° C) WB

Electrical		
Electrical Power Requirements	208 / 230V, 1-phase, 60Hz	
Minimum Circuit Ampacity (MCA)	A	1.24 (60Hz)
Recommended Fuse Size	A	15

External Dimensions		
Unit (H x W x D)	In.(mm)	11-3/4 x 33-3/32 x 33-3/32 (298 x 840 x 840)
Grill (PLP-P40EAU) (H x W x D)	In.(mm)	1-9/16 x 37-3/8 x 37-3/8 (40 x 950 x 950)

Net Weight		
Unit	Lbs.(kg)	55 (25)
Grill	Lbs.(kg)	11 (5)

External Finish	
Unit	Galvanized steel sheet
Grill	White - MUNSELL (6.4Y 8.9/0.4)

Coil Type	Cross fin

Fan		
Type x Quanity	Turbo fan x 1	
Airflow rate (Low-Mid2-Mid1-High)	CFM	742 - 918 - 1,060 - 1,236
Motor Type	DC motor	
Motor Output	kW	0.12
Motor F.L.A.	A	0.99

Air Filter	PP honeycomb (long life filter, anti-bacterial type)

Refrigerant Piping Diameter		
Liquid (High Pressure)	In.(mm)	3/8 (9.52) Flare
Gas (Low Pressure)	In.(mm)	5/8 (15.88) Flare

Field Drain Pipe Size	In.(mm)	O.D. 1-1/4 (32)

Sound Pressure Level		
Low-Mid2-Mid1-High	dB(A)	36 - 39 - 42 - 45


Notes:

Specifications are subject to change without notice.

© 2016 Mitsubishi Electric US, Inc.

Model:PLFY-P48NEMU-E- DIMENSIONS

Unit: in (mm)

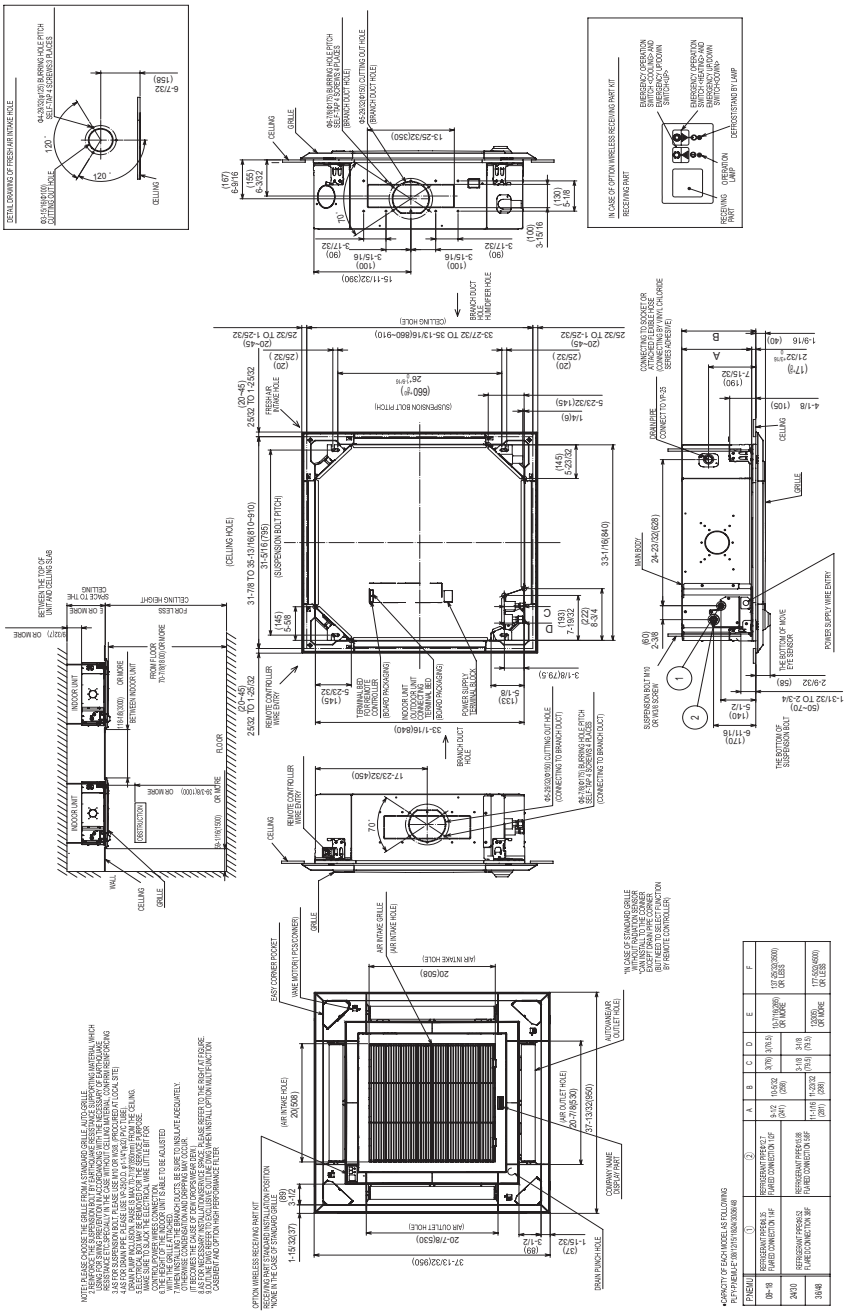

MITSUBISHI ELECTRIC
COOLING & HEATING

1340 Satellite Boulevard. Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com

Intertek

FORM# PLFY-P48NEMU-E-20160701

Specifications are subject to change without notice.

© 2016 Mitsubishi Electric US, Inc.