

SUBMITTAL DATA: PLA-A12BA & PUY-A12NHA3

12,000 BTU/H CEILING CASSETTE AIR-CONDITIONING SYSTEM

Job Name:	Location:	Date:
Purchaser:	Engineer:	
Submitted to:	For ☐ Reference ☐ Approval ☐ Construction	
Unit Designation:	Schedule No.:	

GENERAL FEATURES

- Compact side-discharge outdoor unit
- Quiet operation—indoor and outdoor units
- Built-in drain lift mechanism for condensate removal; lifts to 33-7/16 in.
- Wide air flow pattern for better air distribution
- Auto wave airflow in heating mode—unit independently cycles through horizontal and vertical positions for more even heat distribution
- Independent vane adjustment
- Automatic fan speed control
- Self-check function—integrated diagnostics
- Advanced microprocessor control
- Hard-wired, wall-mounted, remote controller (PAR-21MAA)
- Limited warranty: five years on parts and defects and seven years on compressors

OPTIONAL ACCESSORIES
Indoor Unit

- Multi-function Casement (PAC-SH53TM-E)
- Air Outlet Shutter Plates (PAC-SH51SP-E)
- Wireless Signal Receiver (PAR-SA9FA-E)
- Wireless Remote Controller (PAR-FL32MA)
- i-see Sensor Corner Panel (PAC-SA1ME-E)
- High-efficiency (MERV 10) Filter (PAC-SH59KF-E)

Outdoor Unit

- M-NET Adapter (PAC-SF80MA-E)
- Air Outlet Guide (PAC-SG58SG-E)
- Wind Baffle (WB-PA1)

Cooling*

Rated Capacity 12,000 Btu/h
Minimum Capacity 6,000 Btu/h
SEER 13.5 Btu/h/W
Total Input 1,260 W

* Rating Conditions (Cooling) - Indoor: 80°F (27°C) DB, 67°F (19°C) WB.

Outdoor: 95°F (35°C) DB, 75°F (24°C) WB.

Electrical Requirements

Power Supply 208 / 230V, 1-Phase, 60 Hz
Breaker Size 15 A

Voltage

Indoor - Outdoor S1-S2 AC 208 / 230V
Indoor - Outdoor S2-S3 DC 24V
Indoor - Remote Controller DC 12V

OPERATING RANGE

		Indoor Intake Air Temp.	Outdoor Intake Air Temp.
Cooling	Maximum	95°F (35°C) DB, 71°F (22°C) WB	115°F (46°C) DB
	Minimum	67°F (19°C) DB, 57°F (14°C) WB	0°F** (-18°C) DB

** With optional wind baffle accessory installed. If not installed, the minimum temperature will be 23°F (-5°C) DB.


Indoor Unit

MCA 1 A
Fan Motor 0.51 F.L.A.
Fan Motor Output 50 W
Airflow (Lo - M1 - M2 - Hi) 390 - 420 - 460 - 530 Dry CFM
350 - 390 - 420 - 490 Wet CFM
Sound Level (Lo - M1 - M2 - Hi) 27 - 28 - 29 - 31 dB(A)

DIMENSIONS	UNIT INCHES / MM	PANEL INCHES / MM
W	33-1/16 / 840	37-3/8 / 950
D	33-1/16 / 840	37-3/8 / 950
H	10-3/16 / 258	1-3/8 / 35

Weight (Unit/Grille)

lbs. 49 / 13
kg 22 / 6
External Finish (Grille) Munsell No. 6.4Y 8.9 / 0.4
Field Drainpipe Size O.D. 1-1/4" / 32 mm
Wall-mounted Remote Controller PAR-21MAA
(See Data Submittal Sheet)

Outdoor Unit


Compressor DC Inverter-driven Rotary
MCA 13 A
Fan Motor 0.35 F.L.A.
Sound Pressure Level (Cooling) 46 dB(A)

DIMENSIONS	INCHES / MM
W	31-1/2 / 800
D	13 + 7/8 / 330 + 23
H	23-5/8 / 600

Weight 90 lbs. / 41 kg
External Finish Munsell No. 3Y 7.8 / 1.1
Refrigerant Type R410A
Refrigerant Pipe Size O.D.
Gas Side 1/2" / 12.7 mm
Liquid Side 1/4" / 6.35 mm
Max. Refrigerant Pipe Length 100' / 30 m
Max. Refrigerant Pipe Height Difference 100' / 30 m
Connection Method Flared



DIMENSIONS: PUY-A12NHA3

Unit : mm<inch>

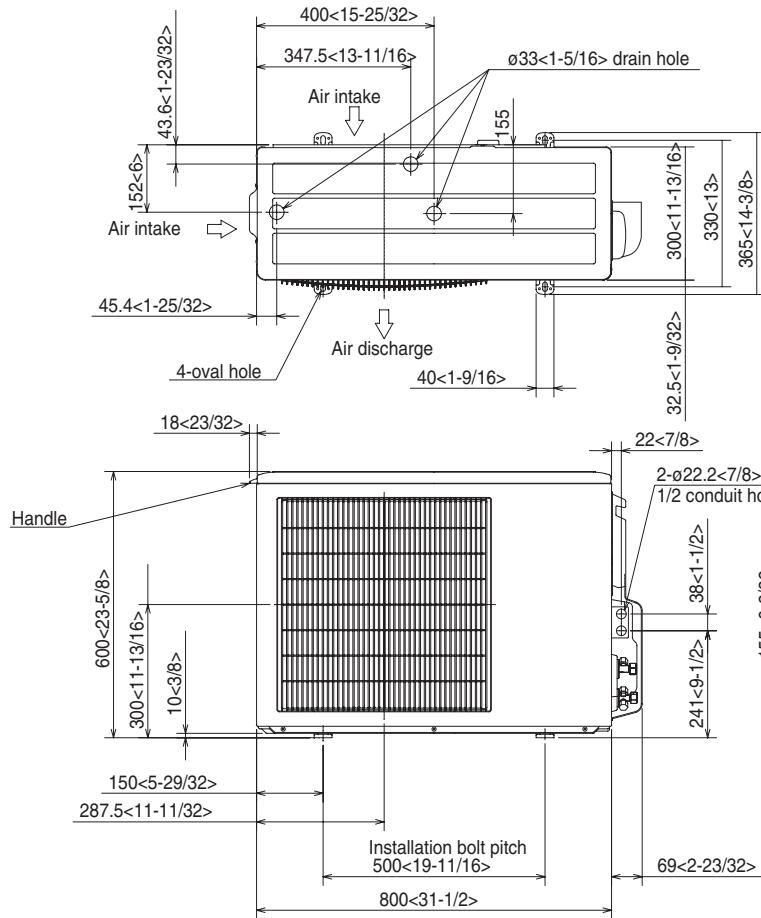


FOUNDATION BOLTS

Please secure the unit firmly with 4 foundation M10<W3/8> bolts. (Bolts, washers and nut must be purchased locally.)

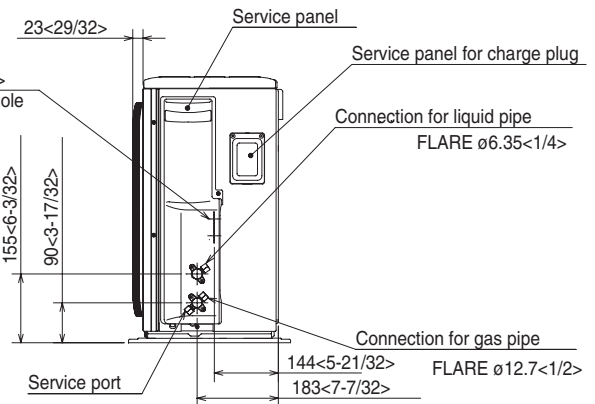

Clearance space needed around the outdoor unit

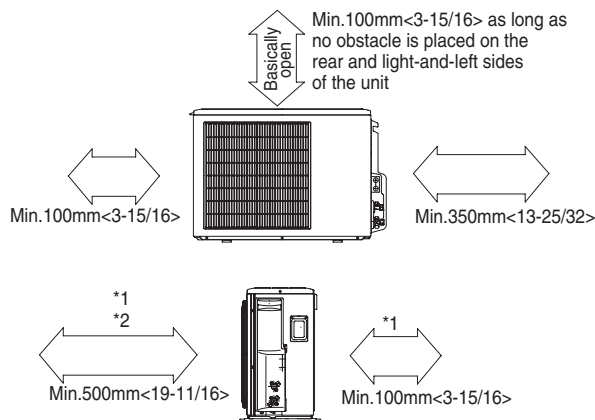

2 sides should be open in the right, left and rear side.

PIPING-WIRING DIRECTION

PIPING AND WIRING DIRECTION
Piping and wiring connection can only be made from the back.

Minimum installation space for outdoor unit

If the unit is installed in a place where short cycle can occur, cooling and heating capacity might be reduced by 10%. Using an air outlet guide (PAC-SG58SG-E) will help deflect exhaust air and improve performance.



HVAC Advanced Products Division

3400 Lawrenceville Suwanee Rd
Suwanee, GA 30024

Tele: 678-376-2900 • Fax: 800-889-9904

Toll Free: 800-433-4822 (#3)

www.mehvac.com

Specifications are subject to change without notice.