



30,000 Btu/h WALL-MOUNTED AIR-CONDITIONING SYSTEM

Date:

Engineer:

For ☐ Reference ☐ Approval ☐ Construction

Schedule No.:

- Limited warranty: five years on parts and defects and seven years on compressors
- Compact side-discharge outdoor unit
- Zone control
- Wireless remote controller
- Automatic fan speed control
- Quiet operation – both, indoor and outdoor units
- Auto restart following a power outage
- Self check function
- Advanced microprocessor control


Voltage

Indoor unit


DIMENSIONS	INCHES	MM
W	55-1/8	1400
D	9-1/4	235
H	13-3/8	340



Remote
Controller

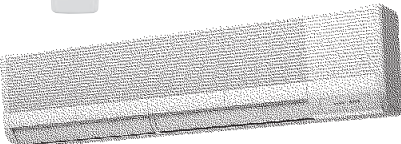

Indoor Unit: PKA-A30FAL



Outdoor Unit: PUY-A30NHA

Compressor	DC inverter/twin rotary
MCA	25
Fan motor	0.75 F.L.A.
Sound level	48 dB(A)

Weight (lbs/Kg)	163 / 74
Refrigerant type	R410A
Refrigerant pipe size O.D. (inches/mm)	
gas side	5/8 / 15.88
liquid side	3/8 / 9.52
Max. refrigerant pipe length (ft/m)	165 / 50
Max. refrigerant pipe height difference (ft/m)	100 / 30
Connection method	flared

*1. Rating conditions (cooling)-indoor : D.B. 80°F, W.B. 67°F
outdoor : D.B. 95°F, W.B. 75°F.



		Indoor intake air temp.	Outdoor intake air temp.
Cooling	Maximum	D.B. 95°F, W.B. 71°F	D.B. 115°F
	Minimum	D.B. 67°F, W.B. 57°F	D.B. 0°F *

* With wind baffle installed. If not installed, the minimum rated temperature is 23°FDB.



Notes:

DIMENSIONS: PKA-A30FAL & PUY-A30NHA

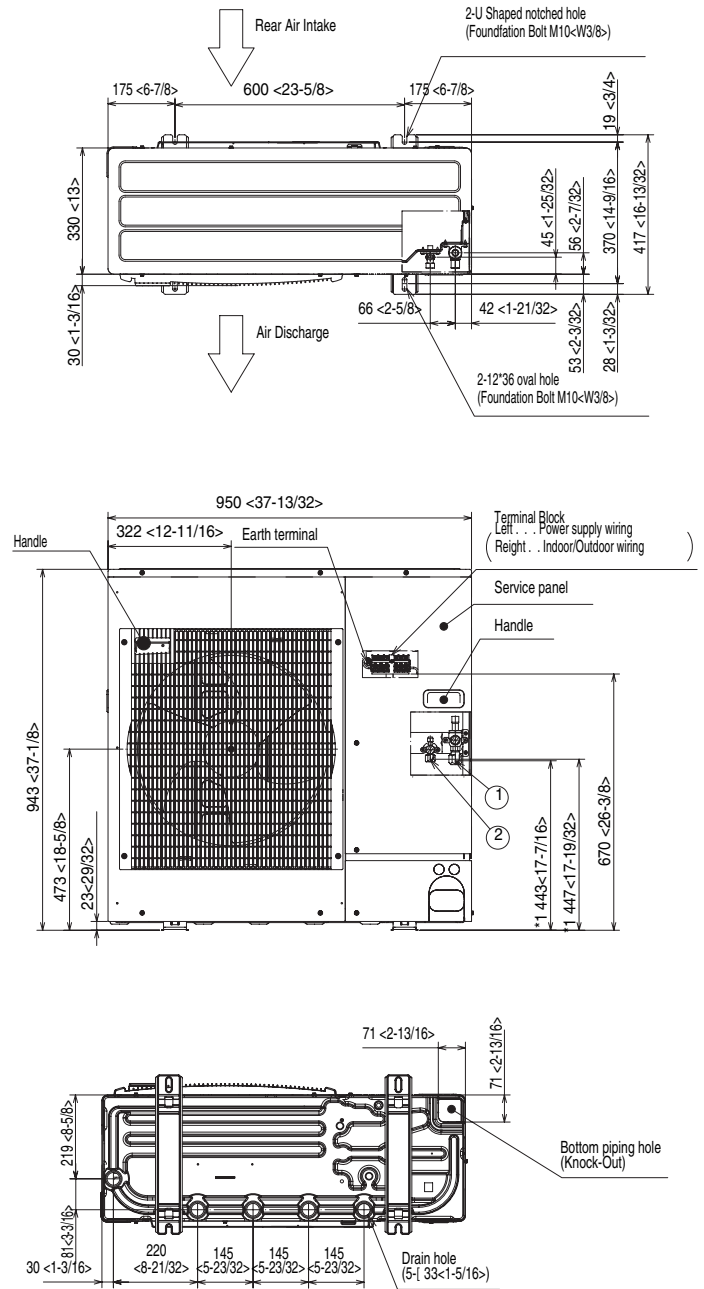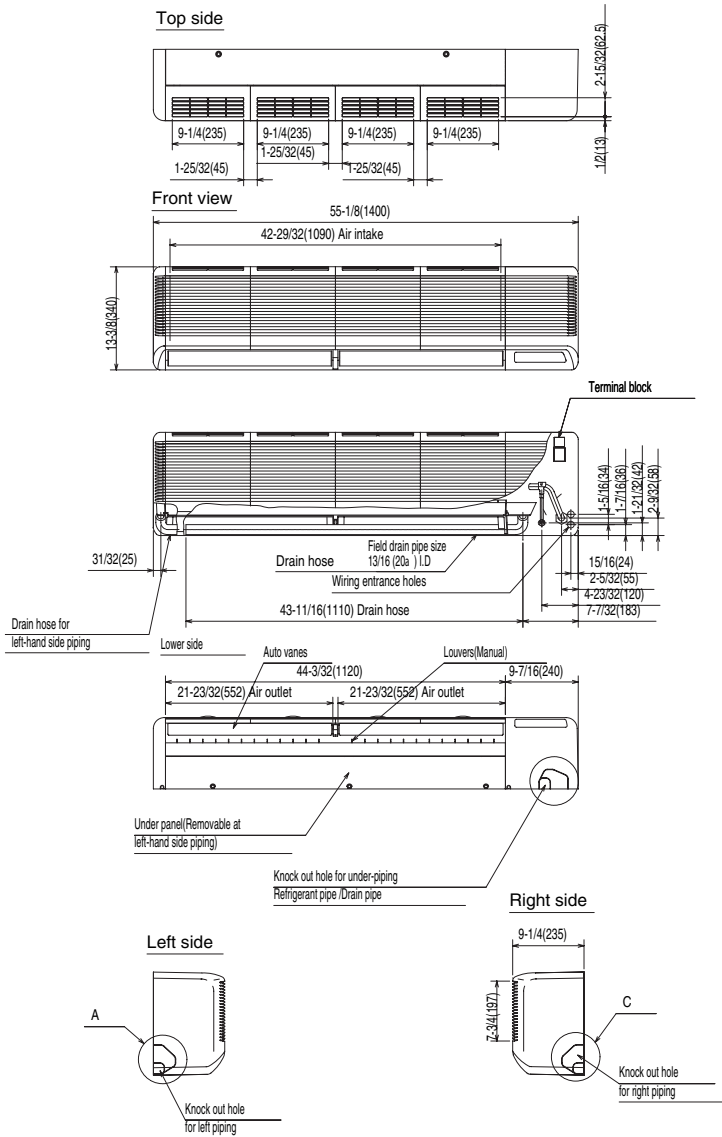

HVAC Advanced Products Division
Mitsubishi Electric & Electronics USA, Inc.

3400 Lawrenceville Suwanee Rd
Suwanee, GA 30024
Tele: 678-376-2900 • Fax: 800-889-9904
Toll Free: 800-433-4822 (#3)
www.mehvac.com
Specifications are subject to change without notice.