

TECHNICAL DATA

Ceiling Cassettes **R410A**

Indoor unit
[Model Name]

NTXCKS09A112AA


NTXCKS12A112AA

NTXCKS15A112AA

NTXCKS18A112AA

Revision:
• Corporate logo has
been changed in
REVISED EDITION-A.

OCDT669 is void.

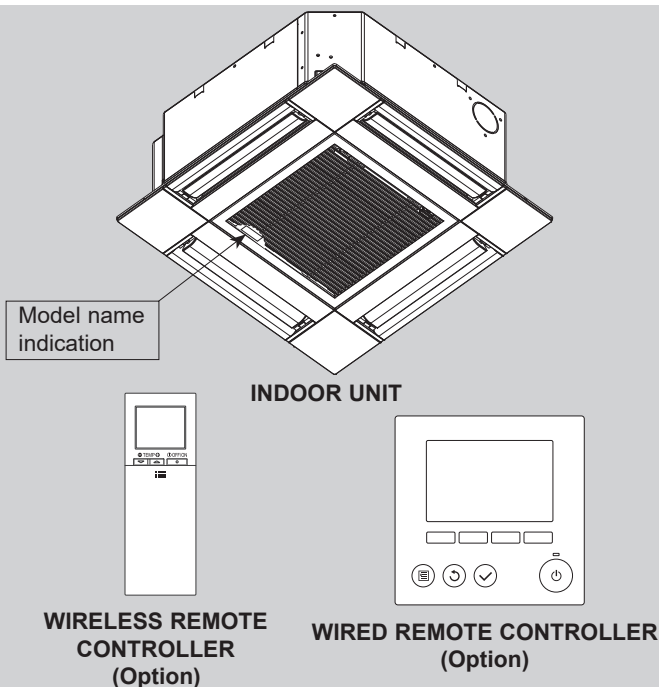

CONTENTS

1. SPECIFICATIONS.....	2
2. POSITION OF THE CENTER OF GRAVITY	2
3. AIR FLOW DATA	2
4. TEMPERATURE AND AIR FLOW DISTRIBUTIONS	3

1

SPECIFICATIONS

OUTLET AIR SPEED AND COVERAGE

Model	Function	Airflow (CFM)	Air speed (ft/s)	Coverage (ft)
NTXCKS09A112AA	Dry	300	19.7	15.1
	Wet	270	17.7	13.7
NTXCKS12A112AA	Dry	335	22.0	16.9
	Wet	302	19.8	15.2
NTXCKS15A112AA	Dry	405	26.7	20.3
	Wet	365	24.0	18.3
NTXCKS18A112AA	Dry	475	31.3	23.7
	Wet	429	28.2	21.4

- The air coverage is the figure up to the position where the air speed is 1 ft/s, when air is blown out horizontally from the unit properly at the High speed position.

The coverage should be used only as a general guideline since it varies according to the size of the room and furniture arranged inside the room.


2

POSITION OF THE CENTER OF GRAVITY

INDOOR UNIT

Ceiling-cassette type

Unit: inch(mm)

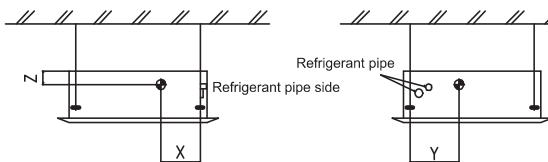

Model name	X	Y	Z
NTXCKS09A112AA	5-29/32 (150)	10-1/4 (260)	4-5/32 (105)
NTXCKS12A112AA	5-29/32 (150)	10-1/4 (260)	4-5/32 (105)
NTXCKS15A112AA	5-29/32 (150)	10-1/4 (260)	4-5/32 (105)
NTXCKS18A112AA	5-29/32 (150)	10-1/4 (260)	4-5/32 (105)

3

AIR FLOW DATA

		NTXCKS09A112AA	NTXCKS12A112AA	NTXCKS15A112AA	NTXCKS18A112AA
Air flow H-M-L	m ³ /min	8.5 - 7.5 - 6.5	9.5 - 8.0 - 6.5	11.5 - 9.0 - 7.0	13.5 - 12.0 - 8.5
	CFM	300-265-230	335-280-230	405-315-245	475-420-300
Air speed at Hi	m/s	6.0	6.7	8.1	9.6
Coverage range	m	4.6	5.1	6.2	7.2


NTXCKS09A112AA

Temperature distribution

<Cooling mode> Standard

Flow angle: 45° 4-way flow


Ceiling height : 2.7m

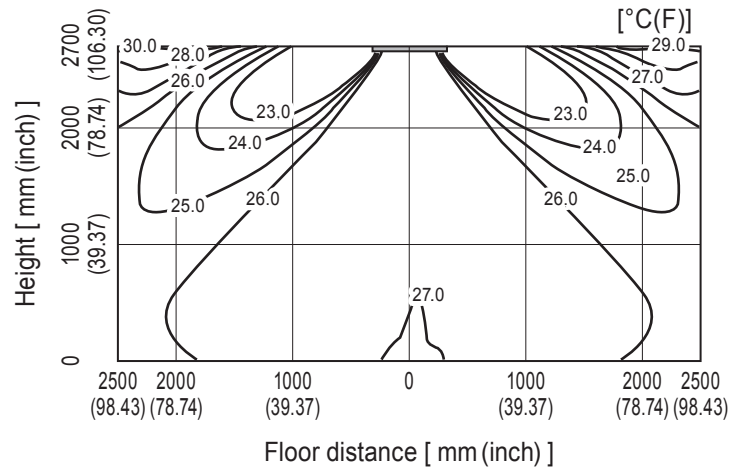

<Heating mode> Standard

Flow angle: 60° 4-way flow

Ceiling height : 2.7m

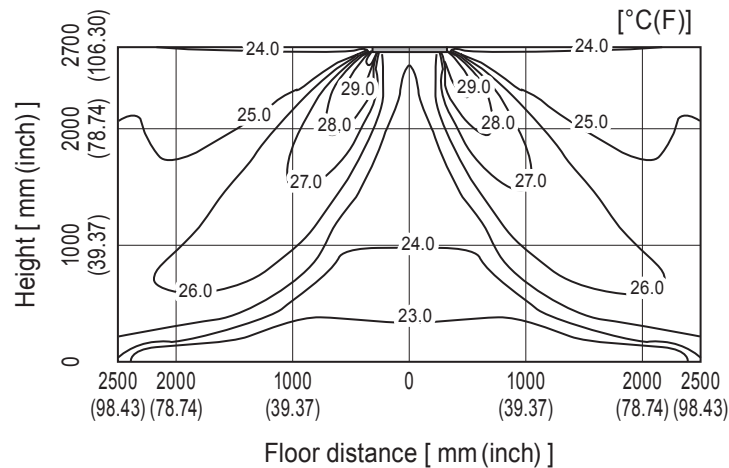

Note : These figures show typical airflow distributions in the conditions above. In the actual installation, they may differ from these figures under the influence of air temperature conditions, ceiling height, cooling/heating load, obstacles, etc.


NTXCKS09A112AA

Airflow distribution

<Cooling mode> Standard

Flow angle: 45° 4-way flow


Ceiling height : 2.7m

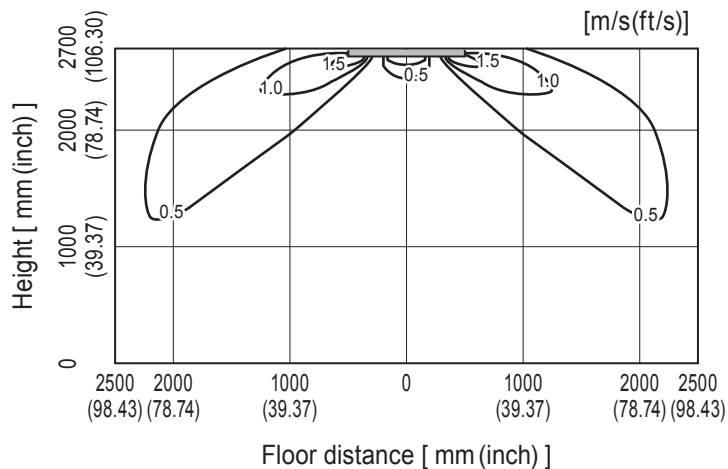

<Heating mode> Standard

Flow angle: 60° 4-way flow

Ceiling height : 2.7m

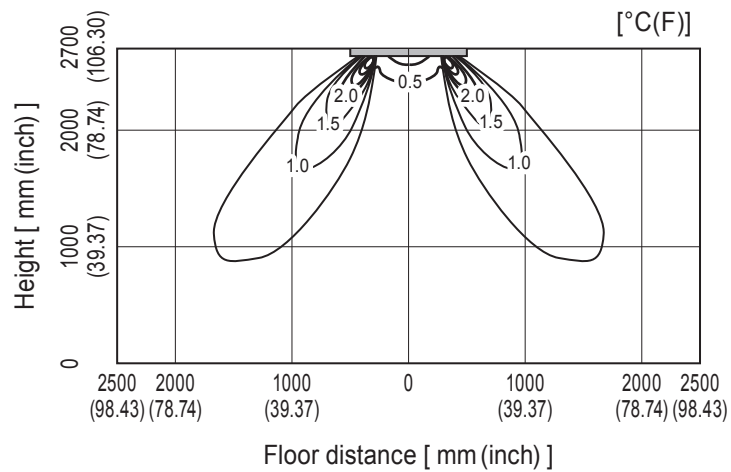

Note : These figures show typical airflow distributions in the conditions above. In the actual installation, they may differ from these figures under the influence of air temperature conditions, ceiling height, cooling/heating load, obstacles, etc.


NTXCKS12A112AA

Temperature distribution

<Cooling mode> Standard

Flow angle: 45° 4-way flow


Ceiling height : 2.7m

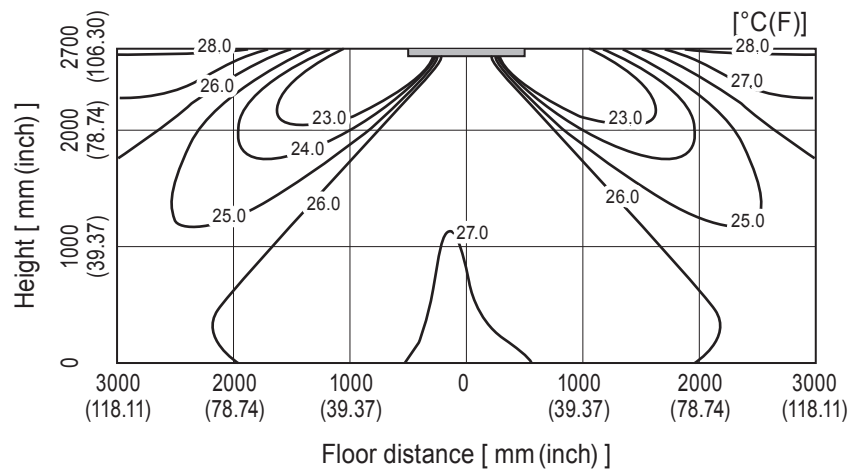

<Heating mode> Standard

Flow angle: 60° 4-way flow

Ceiling height : 2.7m

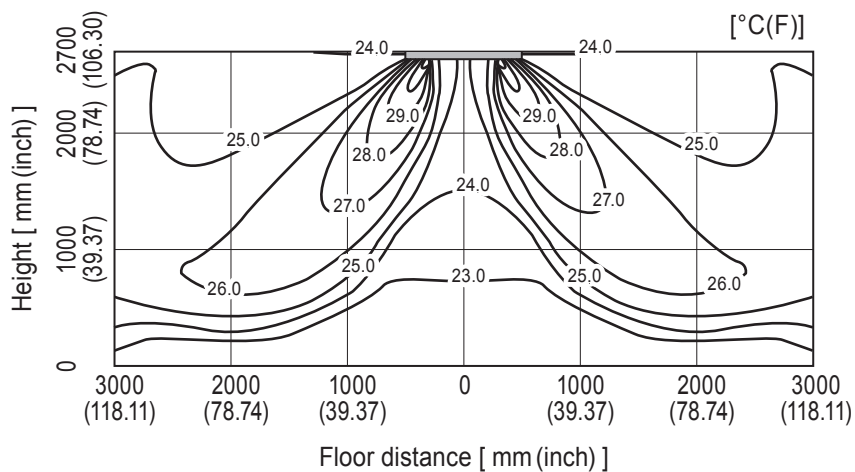

Note : These figures show typical airflow distributions in the conditions above. In the actual installation, they may differ from these figures under the influence of air temperature conditions, ceiling height, cooling/heating load, obstacles, etc.


NTXCKS12A112AA

Airflow distribution

<Cooling mode> Standard

Flow angle: 45° 4-way flow


Ceiling height : 2.7m

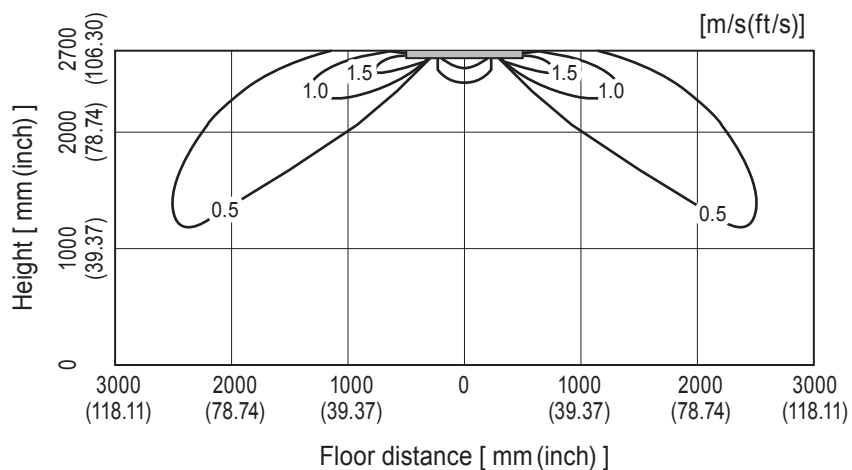

<Heating mode> Standard

Flow angle: 60° 4-way flow

Ceiling height : 2.7m

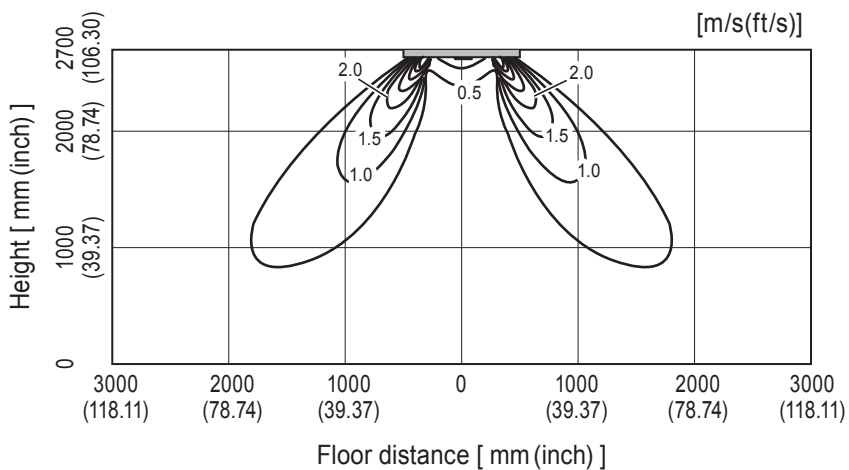


Note : These figures show typical airflow distributions in the conditions above. In the actual installation, they may differ from these figures under the influence of air temperature conditions, ceiling height, cooling/heating load, obstacles, etc.

NTXCKS15A112AA

Temperature distribution


<Cooling mode> Standard

Flow angle: 45° 4-way flow
Ceiling height : 2.7m

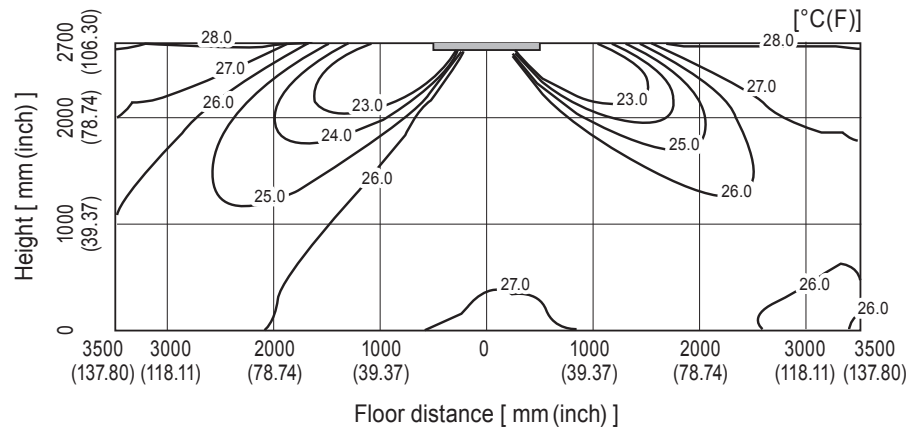

<Heating mode> Standard

Flow angle: 60° 4-way flow
Ceiling height : 2.7m

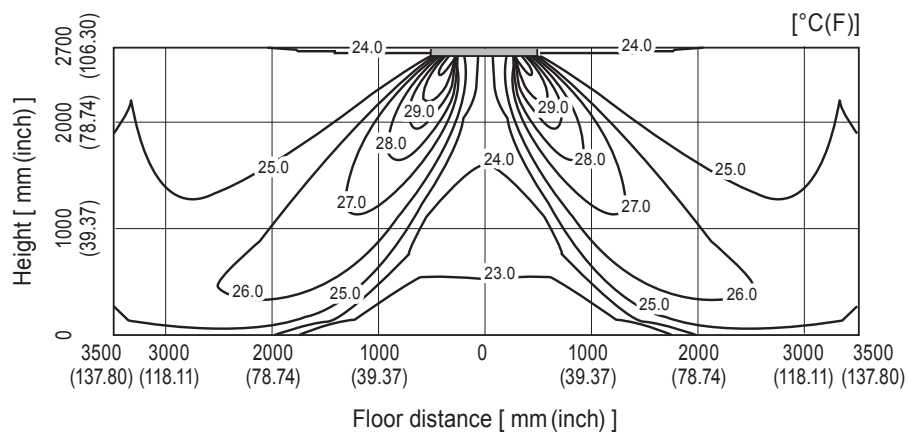

Note : These figures show typical airflow distributions in the conditions above. In the actual installation, they may differ from these figures under the influence of air temperature conditions, ceiling height, cooling/heating load, obstacles, etc.


NTXCKS15A112AA

Airflow distribution

<Cooling mode> Standard

Flow angle: 45° 4-way flow


Ceiling height : 2.7m

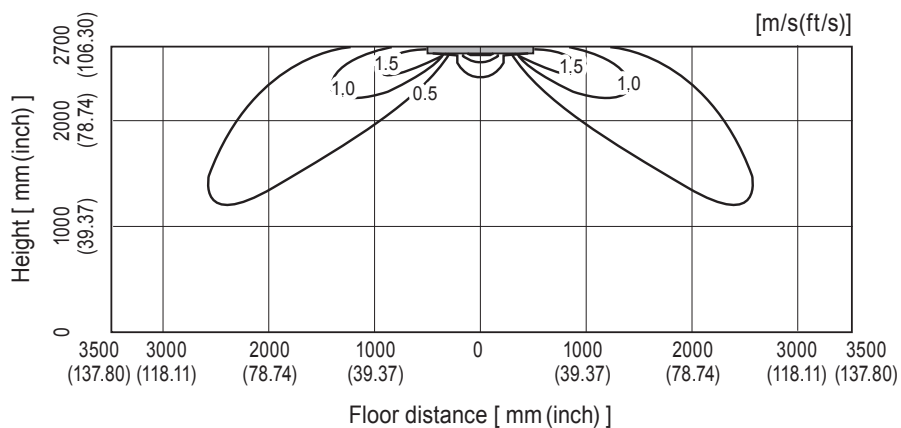

<Heating mode> Standard

Flow angle: 60° 4-way flow

Ceiling height : 2.7m

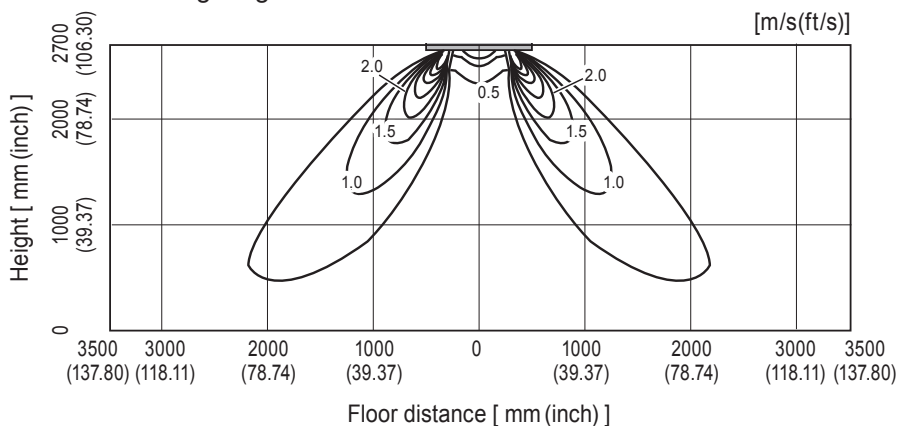

Note : These figures show typical airflow distributions in the conditions above. In the actual installation, they may differ from these figures under the influence of air temperature conditions, ceiling height, cooling/heating load, obstacles, etc.


NTXCKS18A112AA

Temperature distribution

<Cooling mode> Standard

Flow angle: 45° 4-way flow


Ceiling height : 2.7m

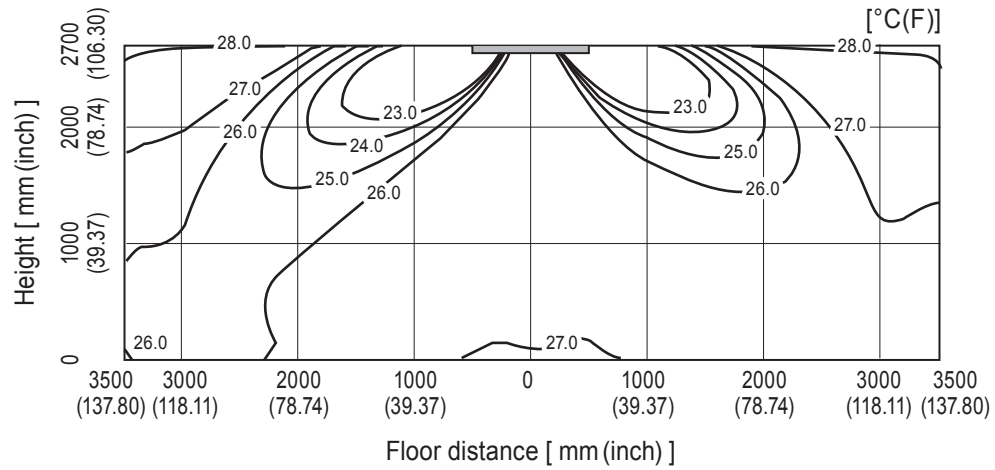

<Heating mode> Standard

Flow angle: 60° 4-way flow


Ceiling height : 2.7m

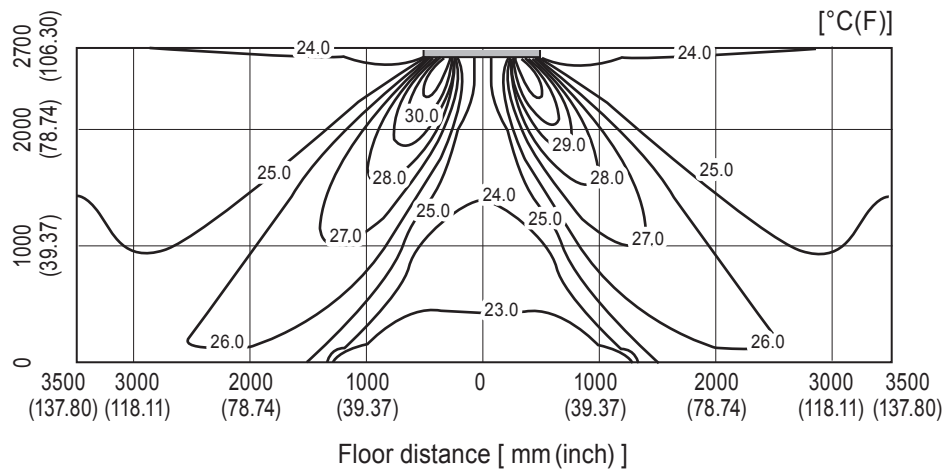


NTXCKS18A112AA

Airflow distribution

<Cooling mode> **Standard**
Flow angle: 45° 4-way flow
Ceiling height : 2.7m

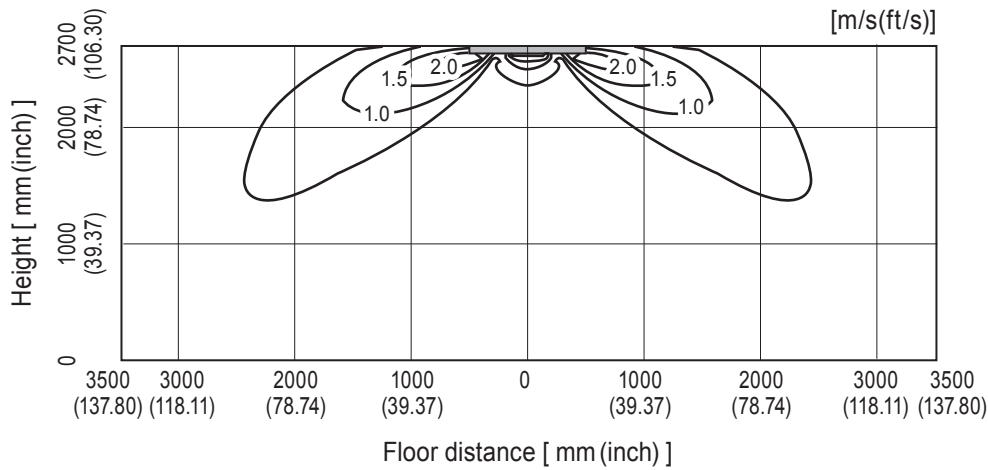

<Heating mode> **Standard**
Flow angle: 60° 4-way flow
Ceiling height : 2.7m

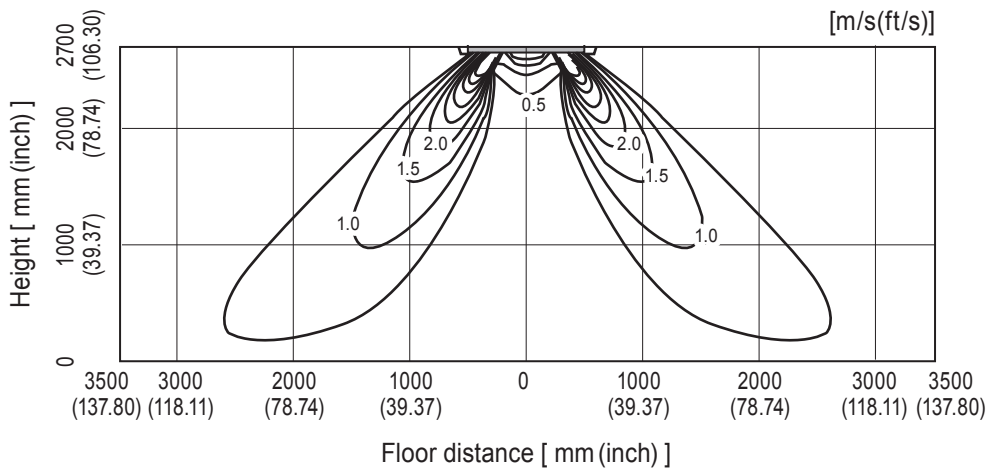

mitsubishi electric trane hvac us llc

HEAD OFFICE: 1340 SATELLITE BOULEVARD, SUWANEE, GA 30024 USA

© Copyright 2018 MITSUBISHI ELECTRIC CORPORATION

Issued: Oct. 2021. No. OCDT669 REVISED EDITION-A

Published: Nov. 2018. No. OCDT669

Made in Japan

Specifications are subject to change without notice.