


PAC-WHS01IE-E IT EXTENDER



Job Name:

System Reference:

Date:

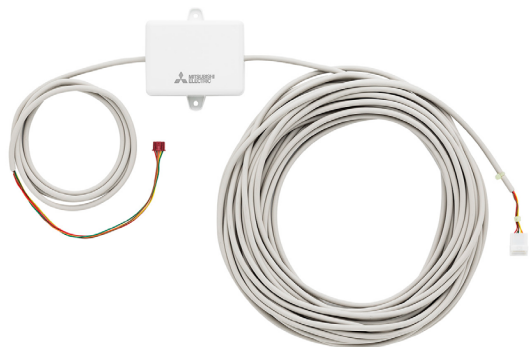

SPECIFICATIONS

- Extends the range of CN105 to 50 ft (15.2 m)
- Weight: 22.2 oz (0.63 kg)
- Ambient temperature range: 32°F - 104°F (0°C - 40°C)
 - Relative humidity up to 80%
 - Avoid exposure to locations with direct sunlight or other sources of heat
- Connected to CN105 connection on indoor unit
- Installed indoors
- Do not ground inside indoor unit
- Included: Connector Connection Case to organize excess cable length


REQUIREMENTS

- Compatible Mitsubishi Electric indoor unit with CN105 connection
 - IT Extender is powered through the indoor unit

COMPATIBLE CN105 DEVICES

- ☐ kumo station® (PAC-WHS01HC-E)
- ☐ Wi-Fi Interface (PAC-WHS01WF-E)
- ☐ Wireless Interface 2 (PAC-USWHS002-WF-2)


Unit: inch(mm)

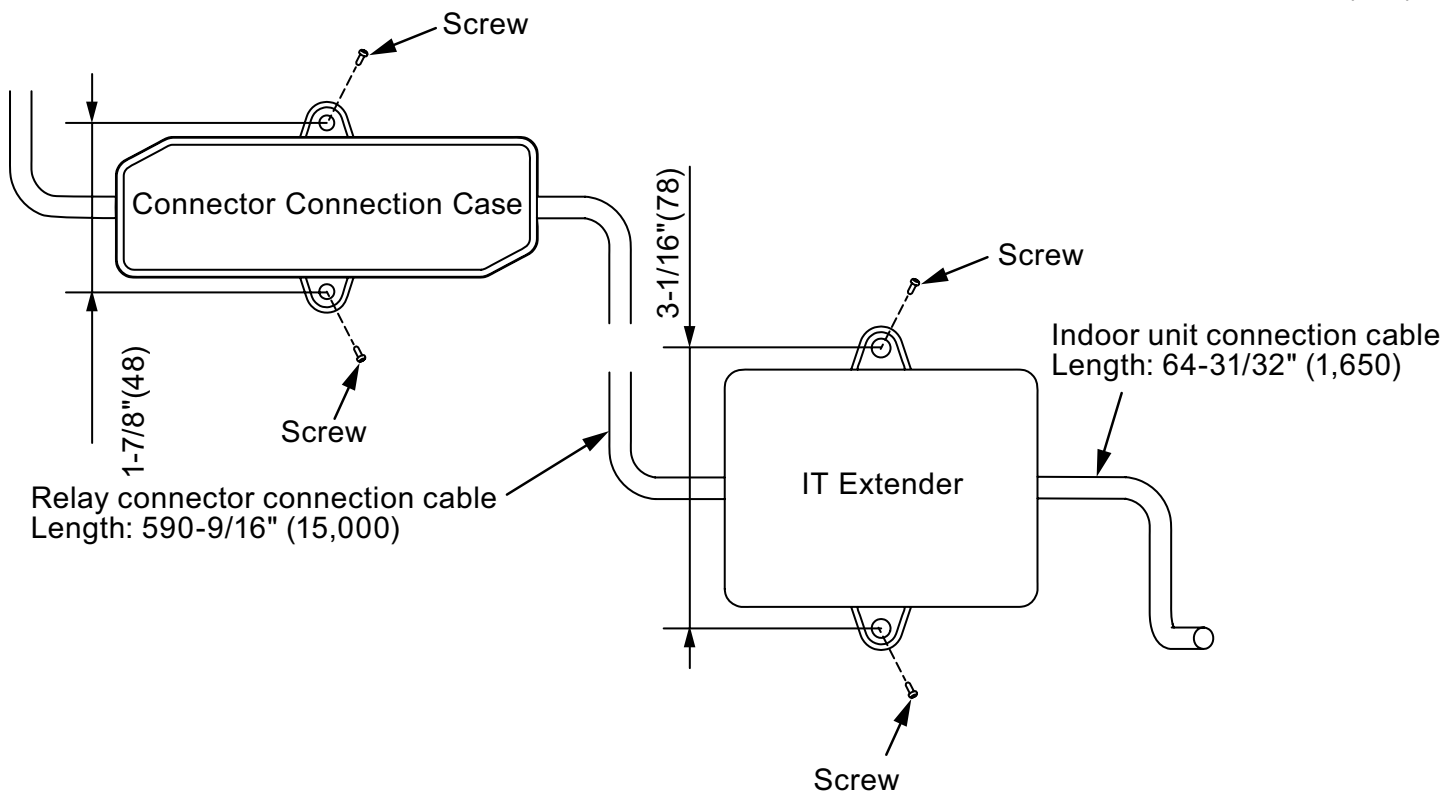

DIMENSIONS AND WIRING DIAGRAMS: PAC-WHS01IE-E

- Dimensions W x D x H:
 - IT Extender: 3-7/16" x 1-7/32" x 2-19/32" (87 x 31 x 66 mm)
 - Case for connector connection: 4-23/32" x 5/8" x 1-19/32" (120 x 16 x 40 mm)

Unit: inch(mm)

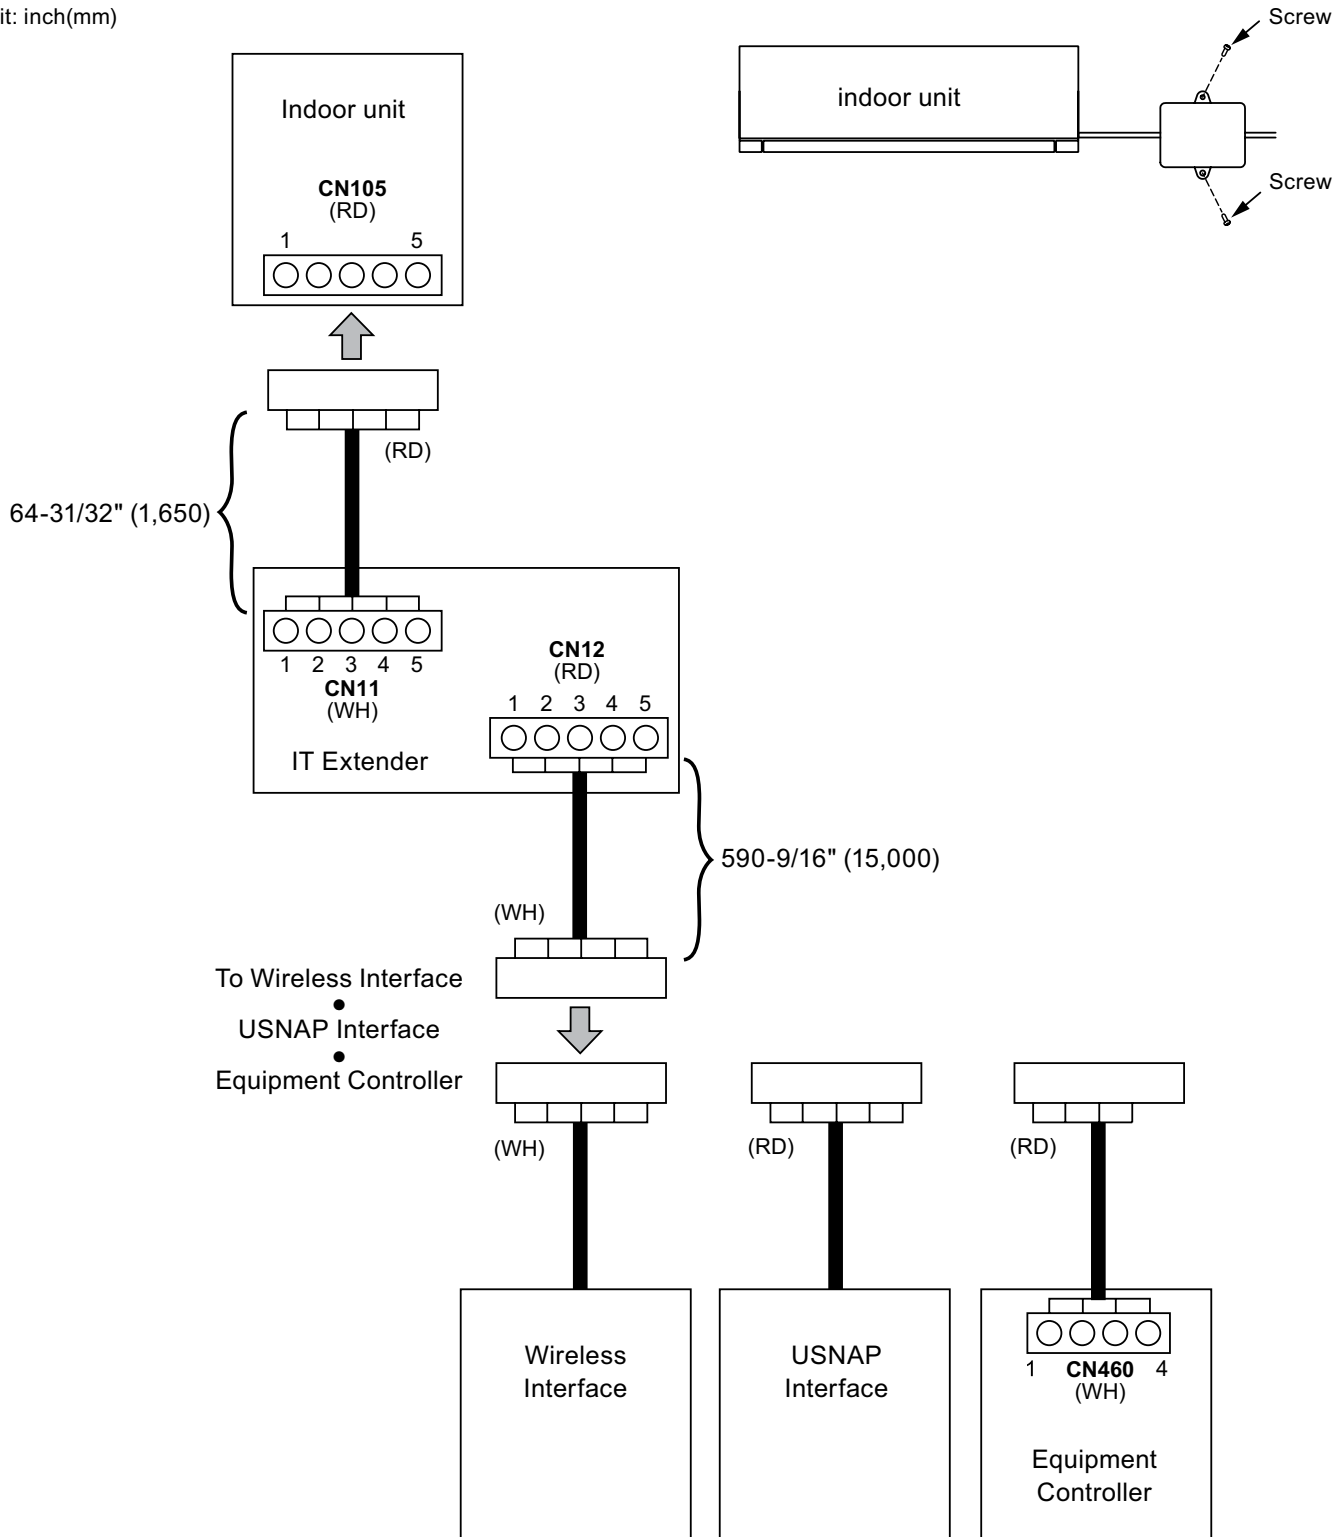

For the installation of connecting equipment, refer to the Installation Manual that comes with each equipment. Ensure to perform an operation test of the connected equipment by following each Installation Manual.

COMPATIBILITY CHART

CITY MULTI®	
TPMFY*BM	NO
TPEFY*MA	OK
TPEFY*MH	ADPT (After April 2012)
TPEFY*MS	ADPT (After June 2012)
TPMFY*BM	OK
TPLFY*EM	OK
TPKFY*LM	NO
TPLFY*FM	OK
TPCFY*KM	ADPT (After June 2012)
TPFFY*CS	ADPT (After April 2012)
TPFFY*RE	ADPT (After April 2012)
TPVFY*AM	OK
TPKFY*BM	ADPT (After April 2012)
TPKFY*HM	ADPT (After May 2012)
TPKFY*KM	ADPT (After June 2012)

Nv-Series	
MSZ-EF	OK
WPH	OK
WST	OK
WMT	OK
WEL	OK
XFKS	OK
AMT	OK
DKS	OK
CKS	OK
UKS	OK

P-Series	
TPCA	OK
TPEAD	OK
TPKA	(HA7) OK (KA7) OK
TPLA	OK
TPVA	OK

Legend:

OK = Compatible

NO = Not compatible

ADPT = Install IT signal adapter

PAC-IT51AD-E or

PAC-IT52AD-E for compatibility