



Table of Contents


Product Overview	Multi-zone M-Series
History of Standard	4 Product Overview
Sustainability	5 Multi-zone Indoor Unit Connections
2023 Minimum Efficiency Standard	6 MXZ-C
Regulatory Changes by Region	7 MXZ-NAHZ
Helping to Prevent Global Warming	8 M-Series Indoor/Outdoor Unit Compatibility.120
Quality Assurance and Testing	9 P-Series Indoor/Outdoor Unit Compatibility121
Wired Controllers	10 MXZ-NAHZ118-119
Wireless Controllers	11 SMART MULTI™
M-Series	Product Overview 123
Product Overview12	
M-Series Capactiy Range	23 MXZ-SM Multi-zone Outdoor Heat Pumps125
M-Series Features 24	
MSZ-FS26	6-29 Appendix
MSZ-EF30	0-31
MSY/Z-GS32	2-34 Piping Installation 129
MSZ-HM36	6-37 Additional M-Series Information
MSZ-JP38	8-39 MXZ-C Piping Lengths 132-133
MSZ-WR40	0-41 MXZ-SM Piping Lengths 134
MFZ-KJ42	2-43 Terminology Explained 135
SUZ	4-45 Points to Remember when Installing Outdoor Units
MLZ46	h-49
SVZ50	0-52 System Control 138-139
SLZ-KF53	3-56 Optional Parts
SEZ-KD58	8-60 M-Series Heating Capacity 142-143 P-Series Heating Capacity 144-145
PEAD62	2-64 MXZ Heating Capacity
P-Series	Additional P-Series Information
Product Overview67	
P-Series Capacity Range	
P-Series Features 74	
PLA 76	
PKA 82	
PVA 88	
PEAD. 94	
intelli-HEAT™100-	-104



History of Innovation

For more than 30 years, Mitsubishi Electric's continuous innovation has brought unbeatable comfort and efficiency to homes and buildings of all shapes, sizes and uses. As a leader in advanced HVAC technologies, including Ductless and Ducted Mini-split and Variable Refrigerant Flow (VRF) heat pump and air-conditioning systems, we have a solution for any home, any building, anywhere. We continually innovate around efficiency, comfort and wellness in buildings or homes of all shapes and sizes by providing industry-leading products, design and technical training, and unmatched end-to-end support.

A better way to heat and cool any home, any building, anywhere.

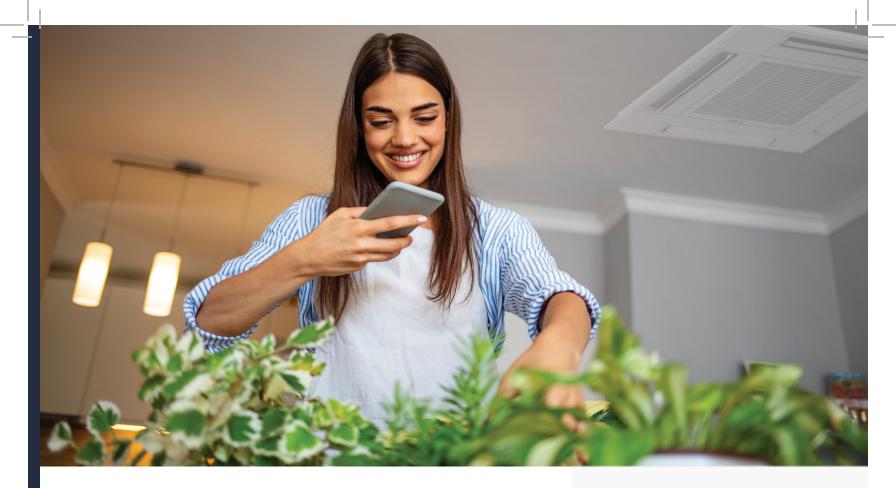

Sustainability

We are working to contribute to a more sustainable society by developing and promoting energy-saving all-electric products and systems, that will reduce the use of fossil fuels in the heating and cooling industry.

Our Commitment

Mitsubishi Electric promotes environmental sustainability through the electrification of residential and commercial heating and cooling products. We continue to advance technologies that reduce waste and promote sustainable resources while increasing energy efficiency and eliminating dependence on fossil fuels. We are committed to improving energy efficiency in all of our operations.

An Industry Changing

Strategic Electrification is the movement to replace fossil fuel-burning technologies with electricity-based alternatives to reduce pollution, increase energy efficiency, and reduce costs for consumers and society. Strategic Electrification in the heating and cooling industry is powering end uses with electricity instead of fossil fuels. Fossil fuel-free heating results in a reduction of greenhouse gas emissions (decarbonization), which is good for the environment, improves indoor air quality by reducing pollution, and with the zoning capabilities of Mitsubishi Electric systems, improves comfort and control.

"Our vision is clear: to align personal comfort with the greater societal good."



INVERTER-Compressor Technology

Conventional systems are either on or off. All or nothing. Our compressors speed up or slow down based on the needs of each room to maintain comfort and conserve energy.



Room by Room Control

Divide your home into zones that best fit your family's needs. Save energy and maximize savings by creating your customized comfort zones.



ENERGY STAR®

Many of our systems are ENERGY STAR qualified and may be eligible for federal and state tax credits or local utility rebates.



2023 Department of Energy Minimum Efficiency Standard


On January 1, 2023, updated minimum efficiency standards for air conditioners, heat pumps, and mini-splits were introduced. These regulations require new testing procedures and reporting metrics, outlined below:

- Testing procedure changes include increased static pressure and airflow setpoint to reflect actual field conditions
- Equipment manufactured after January 1, 2023 must meet new regulations
- Equipment manufactured prior to January 1, 2023, can continue to be sold in the North region without restriction, but also in the Southeast and Southwest where able to meet 2023 standards
- SEER, EER, HSPF will be reported as SEER2, EER2, HSPF2

Regulatory Changes by Region

Compliance for 2023 air conditioners, heat pumps, and mini splits is based on the installation date or the manufactured date, depending on location. In the North region, an AHRI-rated matched system must be compliant on the day the manufacturer produces it. These systems can only be sold and installed in the North region. In the Southeast and Southwest regions, the installation date determines compliance.

Our innovative technology positions us well for this change. We continue to invest in design, engineering, materials, and testing to produce compliant products. We do this without hesitation to remain aligned with sustainability regulations and lead the way forward for the HVAC industry. As a result, we have the most extensive list of products that meet or exceed 2023 regulations in the North and Southeast, with only a few cooling-only exceptions in the Southwest.

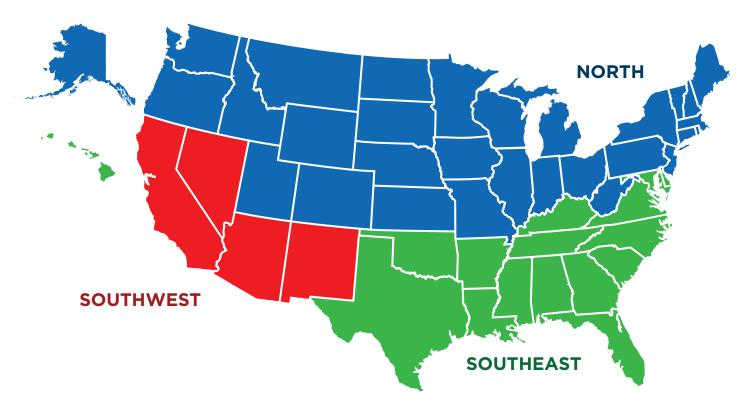

	North Region											
	Units manufactured after December 31, 2022.											
		SEER2	HSPF2									
65,000 BTUH	AC	13.4										
or less	НР	14.3	7.5									

	Southwest Region												
Units manufactured after December 31, 2022.													
SEER2 HSPF2 EER2													
45,000 BTUH or less	AC	14.3		11.7*									
Greater than 45,000 BTUH	AC	13.8		11.2*									
65,000 BTUH or less	НР	14.3	7.5										


	Southeast Region												
Units manufactured after December 31, 2022.													
SEER2 HSPF2													
45,000 BTUH or less	AC	14.3											
Greater than 45,000 BTUH	AC	13.8											
65,000 BTUH or less	НР	14.3	7.5										

^{*9.8} EER2 if SEER2 ≥ 15.2

Helping to Prevent Global Warming

Heat pump technology inspires Mitsubishi Electric to design air conditioners that combine comfort and ecology. We develop technologies to achieve greater efficiency in heat pump operation.

	Comfort	Ecology
1. Inverter	Faster start-up and more stable indoor temperature than non-inverter units.	Fewer On/Off operations than with non-inverter systems.
2. 3D i-see Sensor®	When enabled, the sensor detects the location of people within a space. Customized airflow settings to move air directly toward or away from individuals provides personalized comfort.	The sensor detects the number of people in the space. When the space is detected to be vacant, the unit enters Energy Saving operation or may be set to automatically turn off.
3. Flash Injection	Achieves high heating capacity even at low temperatures plus faster start-up compared to conventional inverters.	Expands the geographical region covered by heat pump heating systems.

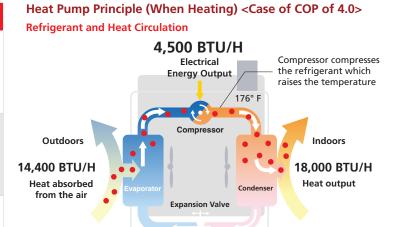

Expansion valve expands ______refrigerant to lower the temperature

122° F

Heat



Quality Assurance and Testing

Cutting-edge technologies and uncompromising commitment to quality and reliability have made us one of the world's most trusted brands in air conditioning and refrigeration equipment and service.

Product Testing

Operating Tests in Harsh Conditions

Harsh environmental conditions of cold regions are simulated for the development of our heat pumps. This is one of the reasons customers in severely cold regions rely on us for comfortable heating.

Combustion Test

Products are subjected to a wide range of tests, including combustion testing, all to confirm safe operation under various conditions. Combustion testing is done by assuming accidental firing and replicating abnormal conditions that cause breakage of pressure components.

Shock Resistance Test

On the assumption of many different logistics environments in the world, we perform drop/strength tests, transport vibration tests, and many other product checks to assure that the quality and performance are maintained when the product reaches the user's home.

Waterproof and Corrosion Test

Since the outdoor unit is subject to rain, wind, and corrosive substances, potential problems are checked through tests such as showering the unit for a certain amount of time and increasing protection to enhance the lifespan of the unit.

Operation Noise Test

Operation noise tests are performed in an anechoic chamber with an extremely low 10 dB(A) of background noise. This is just one of the ways we ensure our customers enjoy extremely quiet heat pumps with a minimum operation noise of 19 dB(A) (sound pressure level).

Engineered Design

Engineers strive to achieve our philosophy of combining comfort and ecology in an effort to continually raise the bar. Therefore, we are working to further improve quality at all stages from development to production.

Efficient Production

Every air conditioner goes through a rigorous electrical inspection on the manufacturing line. In final testing, our experienced inspectors listen for even the faintest operation noise to detect any defect.









Wired Controllers



PAC-SDW01RC-1

Simple Ductless Wired Remote Controller

- Three buttons and a dial with a color screen
- Wired communicating connection
- Field supplied 18 AWG wire up to 50 feet
- Standard operation commands
- Programmable
- English text error messages
- Auto DRY function (COOL ->DRY -> COOL)
 - Based on humidity set point



PAR-41MAAU

Deluxe MA Remote Controller

- Operation modes: Heat/Cool/Auto/Dry/Off
- Room temperature setting & range restriction
- Manual vane angle (P-Series cassette indoor units)
- Smooth maintenance (P-Series only)
- · Auto-off timer & Weekly timer
- Setting screen for 3D i-see Sensor®

- Draft reduction mode
- Daylight Saving Time (DST)
- Requires MAC-334IF-E for use with M-Series ductless products
- Room temperature displays the temperature sensed either at the indoor unit (default) or at the controller



PAR-CT01MAU-SB

Touch MA Remote Controller

- User-friendly customizable full-color touch panel display
- · Ability to add a custom logo on the display
- Large icons with 180 color patterns
- Daily and weekly timers
- Password protected
- Requires MAC-334IF-E for use with M-Series products
- The MELRemo app and Bluetooth® Low Energy (BLE) technology supports communication with smartphones or tablets in multiple languages
- Available on the Apple App store or Google Play App store



PAC-YT53CRAU-J

Simple MA Remote Controller

- Operation modes: Heat/Cool/Auto/Dry/Off
- Controls group operation for up to 16 indoor units in a single group
- Supports Fahrenheit and Celsius
- User defined functions:
 - Fan speed setting
 - Airflow direction
- Set temperature range: 40° F to 95° F depending on operation mode and indoor unit connected
- Set temperature range limit for cool and heat modes
- LOSSNAY®: Simple MA for interlocked system can set high/low/stop on LOSSNAY
- · Room temperature can be sensed either at indoor unit (default) or at the remote controller
- Requires MAC-334IF-E for use with M-Series products


kumo touch



MHK2

- kumo cloud[®] uses a patented algorithm to automatically change the system from cooling mode to heating mode and back based on a survey of each zone, all from a smart device.
- Set up your own alert thresholds based on high or low indoor temperatures and decide whether to receive notifications for filter changes, battery performance, wireless connectivity and more.
- Control your comfort with Amazon Alexa or Google Home voice commands or integrate kumo cloud with other smart home devices using IFTTT.

- When paired with kumo station®, kumo cloud can manage third-party furnaces, boilers, heaters, humidifiers, dehumidifiers, and ventilators.
- The kumo cloud app® becomes more useful than ever with kumo connect. A new suite of alerts and self-help guides that allow you to solve minor issues with your HVAC system yourself. You can send a Diamond Contractor® information about your problem, request service, or call them directly all from within the app.







Wireless Control Interface Devices

USNAP Interface

- Allows indoor units to participate in demand response events
- Works with CTA 2045 DC Form Factor Universal Communication Modules (UCMs)
- 3 LEDs to display device status
 - Communication with UCM
 - Communication to indoor unit
 - Demand Response Events
- System Reset



PAC-WHS01UP-E

Thermostat Interface

- Control your system using a third-party 24VAC transformer
- Wires back to the indoor unit using CN105 to replace the return air temperature sensor
- Maximum wiring length: 39" (12 m)
- · Exterior shell made of ABS resin



PAC-US445CN-1

MAC-334IF-E System Control Interface

- Allows M-Series indoor units to communicate with the CITY MULTI® Controls Network via M-Net
- Provides an input to allow remote On/Off control of indoor unit
- Allows M-Series indoor units to connect to MHK2 Wall-Mounted Wireless Controller when using other MAC-334IF-E functions (can have the MHK2 or kumo cloud® wireless interface connected in this situation)



MAC-334IF-E


- Allows M-Series indoor units to connect to a MA controller
- Power: 12V DC (supplied from indoor unit)

BACnet® Interface

- Allows for third-party home automation/ building management system to control indoor unit
- One interface required per indoor unit
- Compatible with remote controllers
- Cable length: 37"



PAC-UKPRC001-CN-1

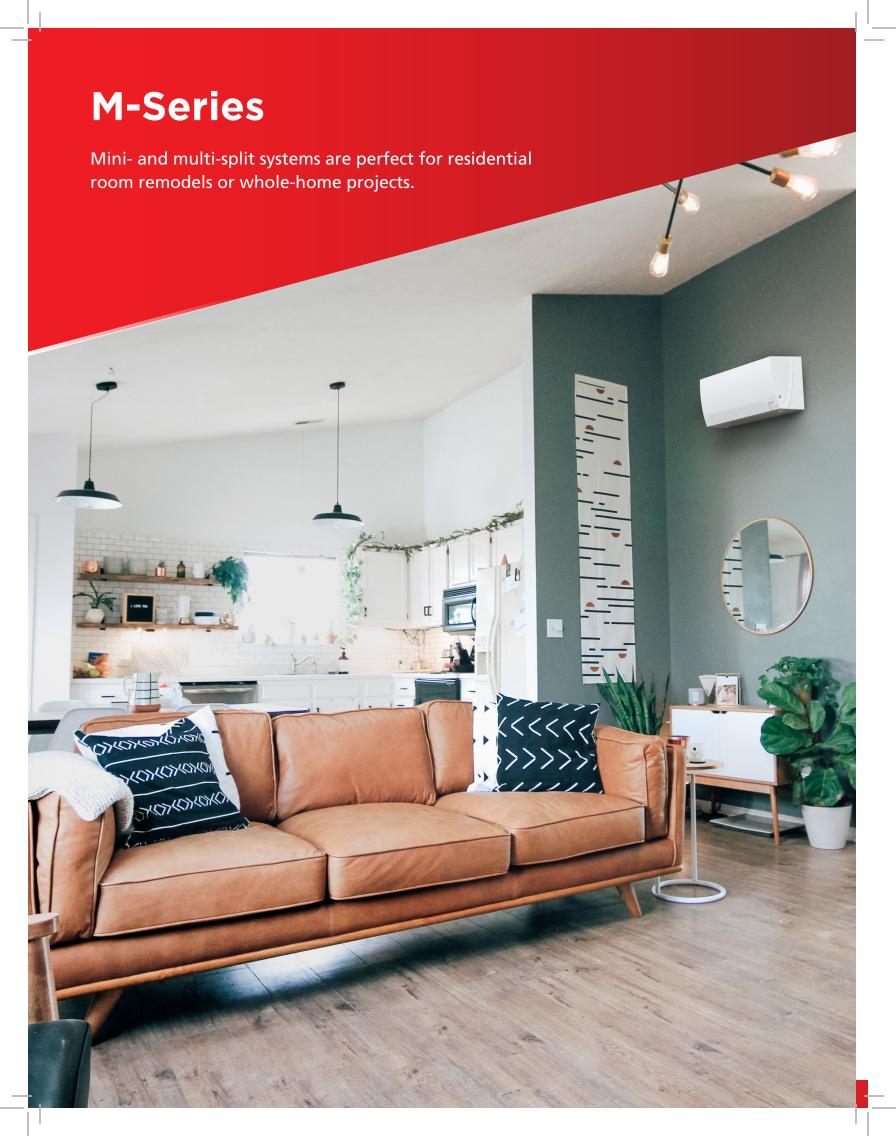


M-Series Product Range

Heat Pumps

A multiple model lineup to choose from, each with various outstanding features. In addition to INVERTER-equipped wallmounted models, floor-standing and multi-position air handlers can be selected. Choose the best style to match usage needs.

Wall-mounted Style

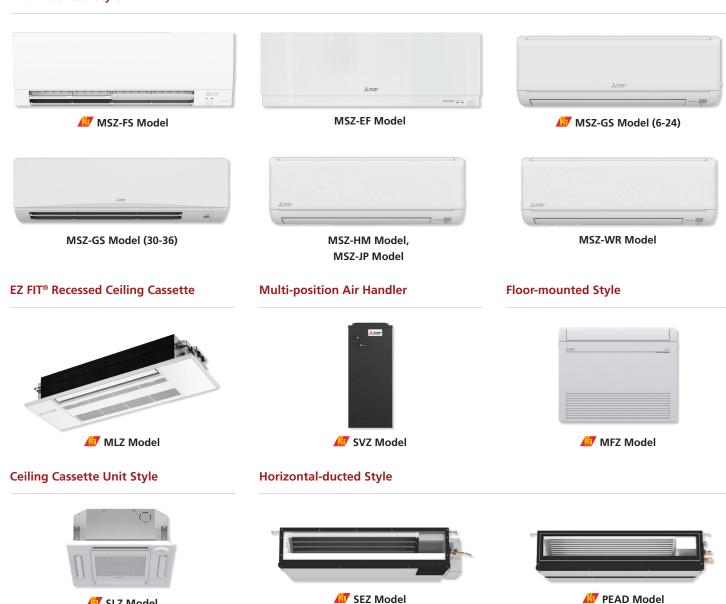

Cooling Only

SLZ Model

For applications with needs for only cooling, there are cooling-only models to choose from.



Exclusive Features

▲ 3D i-see Sensor® Detection

Maintain your precise desired temperature with our sensor that scans the room and adjusts accordingly.

Detects Number Of People

The 3D i-see Sensor detects the number of people in the room and adjusts the power accordingly. This saves energy in places where the number of people changes frequently. Additionally, when the area is continuously unoccupied, the system switches to an advanced Power Saving Mode. Depending on the setting, it can also stop the operation.

Detects the Location of Individuals

The airflow in the space is entirely customizable. The user can choose Direct Airflow or Indirect Airflow configurations for each of the four air vanes. Once the sensor detects a person within the area, each air vane adjusts automatically to the preferred settings.

Highly Accurate Temperature Measurements

A total of eight sensors rotate a full 360° in 3-minute intervals. The sensor measures temperature throughout the space, and the algorithm determines the number of people within the area and their locations.


Room Occupancy Energy Saving Mode

The 3D i-see Sensor detects the number of people in the room. It calculates the actual occupancy rate as a percentage of the maximum number of people. When the occupancy rate is approximately 30%, the system energy savings is equivalent to 2° F during cooling or heating operation. The Energy Saving Mode algorithm controls the room temperature based on space occupancy.


Area Temperature Monitor

The 3D i-see Sensor monitors the whole room in small sections and directs the airflow to regions within the space as needed. For example, if the system is in cooling mode and the middle of the room is hot, then more airflow is directed toward the problem area to even out the room temperature. This smart feature eliminates unnecessary heating and cooling costs while delivering more uniform temperatures and comfort throughout the room.


Detects Number of People




Detects Location of Individuals




Room Occupancy Energy Saving Mode

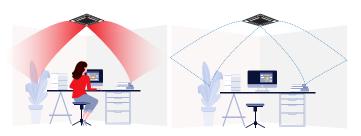

Area Temperature Monitor

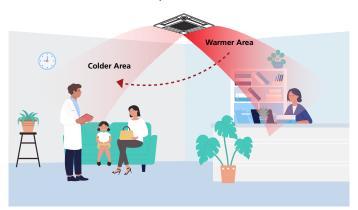

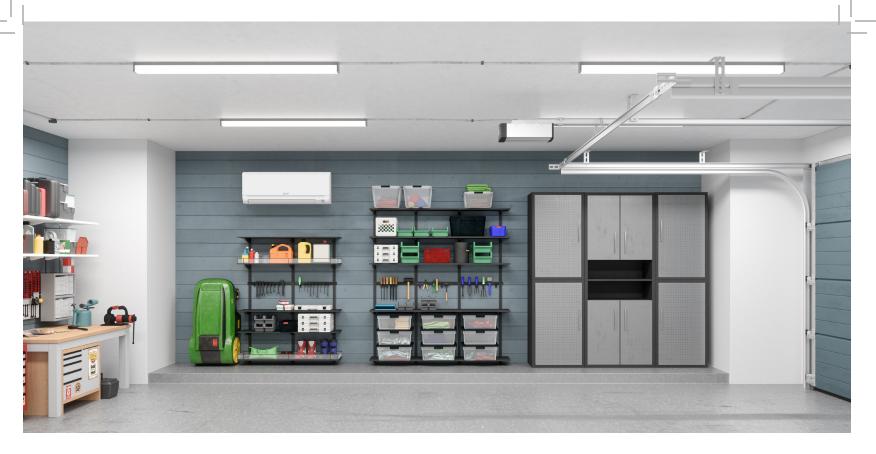

▲ 3D i-see Sensor® Airflow

No Occupancy Energy Saving Mode

When the 3D i-see Sensor detects that no one is in the room, the system switches to a preset power-saving mode. If the area remains unoccupied for more than 60 min, the system energy savings is equivalent to 4° F during cooling or heating operation. This mode reduces energy wasted on heating and cooling unoccupied rooms.

Direct/Indirect Settings

When set to Indirect Airflow, the vanes direct air horizontally across the ceiling away from individuals, eliminating drafts. The Direct Airflow setting blows conditioned air toward people within the space.

Seasonal Airflow

When Cooling: The unit saves energy while keeping a comfortable temperature by automatically switching between ventilation and cooling modes. Once the room reaches the desired temperature, the system switches from cooling mode to swing-fan operation to extend the amount of time the space maintains set point.



No Occupancy Energy Saving Mode



When Heating: Once the room reaches the temperature set point, the system switches from heating mode to fan mode. The fan recirculates air throughout the space to prevent heated air from being wasted by collecting at the ceiling. This feature improves room comfort by eliminating annoying temperature differences caused by air stratification.




The less sophisticated conventional air conditioning and heating systems run at full power until it reaches a set temperature and then stops, only to turn on again — sometimes within an hour — as the temperature becomes uncomfortable. Each time the system turns on its noisy outdoor unit, it uses more energy than it does during regular operation.

The INVERTER, at the heart of our system, eliminates the wasteful start and stop cycle. Just as your heart always beats, but automatically beats faster when you exercise, the system is always active with the INVERTER enabling it to automatically adjust conditioning when its temperature sensors detect even subtle changes. You don't have to think about it and the system is so quiet you won't hear it either. Rooms are cooled and heated faster and more efficiently. The INVERTER regulates energy consumption so that the system only uses the precise amount of energy needed to keep each room at the temperature you choose. This is greener and more sustainable than running at full power like conventional systems and can reduce energy consumption by up to 40 percent.


How INVERTERS Work

Inverters electronically control the electrical voltage, current and frequency of electrical devices such as the compressor motor in a heat pump. They receive information from sensors monitoring operating conditions, and adjust the revolution speed of the compressor, which directly regulates air conditioner output. Optimum control of operation frequency results in eliminating the consumption of excessive electricity and providing the most comfortable room environment.

The compressors of air conditioners without an inverter start and stop repeatedly in order to maintain the preset room temperature. This repetitive on/off operation uses excessive electricity and compromises room comfort. The compressors of heat pumps equipped with an inverter run continuously; the inverter quickly optimizes the operating frequency according to changes in room temperature. This ensures energy-efficient operation and a more comfortable room.

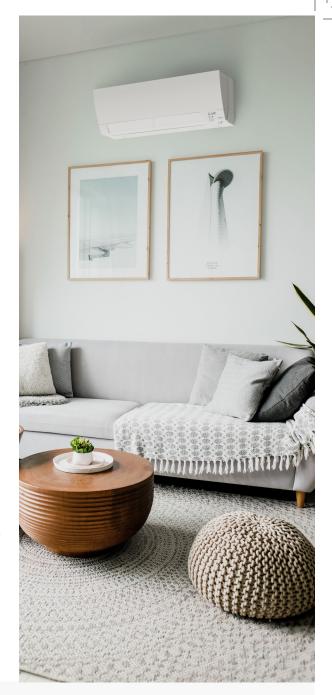

INVERTER vs. Conventional System Operation

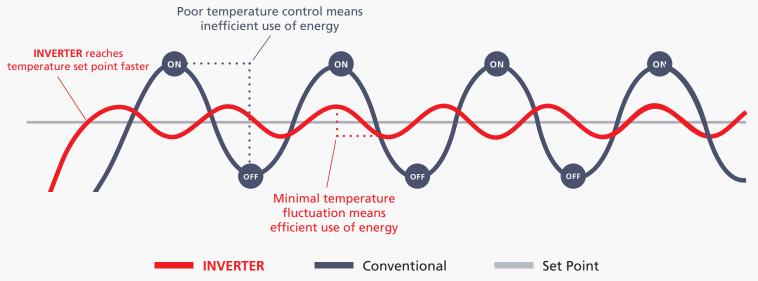

™ INVERTER Features

DC Fan Motor

A highly efficient DC motor drives the fan of the outdoor unit. Efficiency is much higher compared to an equivalent AC motor.

Grooved Piping

High-performance grooved piping is used in heat exchangers to increase the heat exchange area.

Heat Caulking Fixing Method

A Heat Caulking Fixing Method replaced arc spot welding to secure internal parts in place. This change reduces the distortion of internal components, resulting in additional efficiency gains.

Highly Efficient DC Scroll Compressor

Adding a frame compliance mechanism to the DC scroll compressor achieves further efficiency. The mechanism allows movement in the axial direction of the frame supporting the cradle scroll, thereby significantly reducing leakage and friction loss and ensuring high efficiency at all speeds.

Joint Lap DC Motor

Mitsubishi Electric has developed a unique motor, called the Poki-Poki Motor in Japan, manufactured using a joint lapping technique. This innovative motor operates based on a high-density, high-magnetic force, leading to extremely high efficiency and reliability.

Magnetic Flux Vector Sine Wave Drive

This drive device is a microprocessor that converts the compressor motor's electrical current waveform from a conventional waveform to a sine wave (180°conductance) to achieve higher efficiency by raising the motor winding utilization ratio and reducing energy loss.

PAM (Pulse Amplitude Modulation)

PAM is a technology controlling the current waveform to resemble the supply voltage wave, resulting in reduced loss and more efficient electricity use. PAM control effectively utilizes 98% of the input power supply.

Power Receiver and Twin LEV Control

Mitsubishi Electric developed a power receiver and twin linear expansion valve (LEVs) circuit that optimize compressor performance. This technology ensures ultimate control in response to the operating waveform and outdoor temperature. Tailoring the system to the characteristics of R410A refrigerant improves operational efficiency.


Reluctance DC Rotary Compressor

Powerful neodymium magnets used in the reluctance DC motor rotor produce strong magnetic torque and reluctance torque, resulting in more efficient operation.


Room Temperature Maintained

The inverter monitors the varying compressor motor frequency and creates the most efficient waveform for the motor speed. This results in improving operating efficiency at all speed ranges, using less power, and reducing annual electricity costs.

Grooved Piping



Highly Efficient DC Scroll Compressor




Substantial reduction in leakage and friction loss

Joint Lap DC Motor







PAM (Pulse Amplitude Modulation)



Power Receiver and Twin LEV Control



Reluctance DC Rotary Compressor



Energy Saving Features

Econo Cool Mode

Econo Cool is an intelligent temperature control feature that adjusts the amount of air directed toward the body based on discharge air temperature. The set point can be raised by 4° F without any loss in comfort, achieving an additional 20% energy efficiency.

Function only available during manual cooling operation





Conventional Cooling Mode

Econo Cool Mode

	Conventional	Econo Cool
Ambient Temperature	95° F	95° F
Set Point	77° F	81° F
Percieved Temperature	86° F	85° F

Demand Function (On-site Adjustment)

Based on the signal input, energy consumption can be reduced up to 100% of the typical consumption. The demand function can be activated by a commercially available timer or an on/off switch added to the CNDM connector (optional) on the outdoor unit control board.

SW7-1	SW1	SW2	Energy Consumption
	OFF	OFF	100%
ON	ON	OFF	75%
	ON	ON	50%
	OFF	ON	0% (Stop)

PUY/PUZ outdoor only. Example: P-Series Limit energy consumption by changing the settings of SW7-1, SW1 and SW2 on the control board of the outdoor unit. The following settings are possible.

₹ Air Quality

Nano Platinum Filter

This filter has a large capture area and incorporates nanometer-sized platinum-ceramic particles that work to kill bacteria and deodorize the circulating air.

Catechin Filter

Catechin is a bioflavonoid byproduct of green tea with both antiviral and antioxidant qualities. In addition to improving air quality, it prevents the spreading of bacteria and viruses throughout the room, and also has an excellent deodorizing effect.

Air Filter

This filter removes dust particles from the air.

Deodorizing Filter

Deodorizing filters have a catalyst coating on the honeycombstructured frame to deactivate small foul-smelling substances in the air. Once captured, they break down the source of the odor, resulting in cleaner air.

Electrostatic Anti-allergy Enzyme Filter

This filter is charged with static electricity, enabling it to attract and capture dust particles that regular filters cannot. This filter can also trap allergens such as bacteria and decompose them using enzymes retained in the filter.

Air Purifying Filter

This filter has a large capture area and deodorizes the circulating air.

Fresh-air Intake

The direct intake of fresh exterior air enhances indoor air quality.

High-efficiency Filter

This high-performance filter has a much finer mesh compared to standard filters, and is capable of capturing minute particulates floating in the air that were not previously caught.

Oil Mist Filter

The oil mist filter prevents oil mist from penetrating the inner part of the air conditioner.

Long-life Filter

A special process for the entrapment surface improves the filtering effect, making the maintenance cycle longer than that of units equipped with conventional filters.

Filter Check Signal

The system monitors the air conditioner operating time, and the user is notified when filter maintenance is necessary.

&三 Air Distribution

Double Vane

The double vane separates airflow into different directions to supply air across a wide area of the room and also reach people in two separate locations.

Natural Flow Operation

Airflow becomes more like a light breeze, and the occupant feels more comfortable.

Indirect/Direct Mode

This mode offers finely-tuned operation by locating where an occupant is in the room and sending the air directly or indirectly according to the selected mode.

Powerful Operation

The air conditioner will automatically adjust the fan speed and temperature for 15 minutes. Rapid cooling and heating will make the room comfortable more quickly.

Wide Airflow

Especially beneficial for large spaces, helping to ensure that the air is well circulated and reaches every corner of the room. Select the desired airflow pattern, and it will distribute air horizontally over a wide-ranging 150° in heating mode and 100° in cooling mode.

Vertical Vane

The air outlet fin swings from side to side so that the airflow reaches every part of the room.

High Ceiling Mode

In the case of rooms with high ceilings, the outlet-air volume can be increased to ensure that air is circulated all the way to the floor.

Low Ceiling Mode

If the room has a low ceiling, the airflow volume can be reduced for less draft.

Auto Fan Speed Mode

The airflow speed mode adjusts the fan speed of the indoor unit automatically according to the present room conditions.

Auto Vane Control

Outlet vanes can be moved left and right, and up and down, using the remote controller. This improved airflow control feature solves the problem of drafts.

Horizontal Vane

The air outlet vane swings up and down so that the airflow is spread evenly throughout the room.

Blue Fin Coating

Blue Fin Heat Exchanger

Anti-corrosion treatment is applied to the heat exchanger of the outdoor units. This coating prevents the corrosion of the aluminum fins caused by salt in the air, especially in coastal areas.

Corrosion of the heat exchanger will affect the efficiency and performance of the air conditioner.



Standard HEX Coatings:

Rated for 240 hours spraying time*



Blue Fin HEX coatings:

Rated for 2,000 hours spraying time*

*ASTM B117 Standard Coating is applied on all M-Series single-zone outdoor units

Compa	atibility
Outdoor Unit	Indoor Unit
MUZ-FS	J
MUFZ-KJ	J
MUZ/Y-GS	J
MUZ-HM	J
MUZ-JP	J
MUZ-WR	J
SUZ-KA-NAZ (9,12,15)	J
SUZ-KA-NAHZ (9,12,15,18)	J
MXZ-SM Smart Multi™ (Branch box Type)	J

Convenience

Smart Set

Smart Set is a simplified setting function that recalls the preferred (preset) temperature by pressing a single button on the remote controller. Press the same button twice to immediately return to the previous temperature setting. Using this function contributes to comfortable waste-free operation, realizing the most suitable air conditioning settings and saving on power consumption when, for example, leaving the room or going to bed.





Auto Changeover

The air conditioner automatically switches between heating and cooling modes to maintain the desired temperature.

Low-Temperature Cooling

Intelligent fan speed control in the outdoor unit ensures optimum performance even when the outside temperature is low.

Ampere Limit Adjustment

Dip switch settings can adjust the maximum electrical current for operation. This function is highly recommended for managing energy costs.

Auto Restart

Especially useful during of power outages, the unit turns back on automatically when power is restored.

Operation Lock (Outdoor Unit)

To accommodate specific-use applications, cooling or heating operation can be specified when setting the control board of the outdoor unit. This is a convenient option when a system needs to be configured for exclusive cooling or heating.

Sleep Mode

When Sleep Mode is activated using the wireless remote controller, it will switch to the settings described below.

- After 30 minutes, the temperature will automatically change to the sleep mode temperature, which the user can set beforehand.
- The fan speed will immediately change to low fan speed.

On/Off Operation Timer

Use the remote controller to set the times of turning the air conditioner On/Off.






(+) Exclusive Features

Weekly Timer Function


Easily set desired temperatures and ON/OFF times to match lifestyle patterns. Reduce wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

Sample Operation Pattern (Winter/Heating Mode)

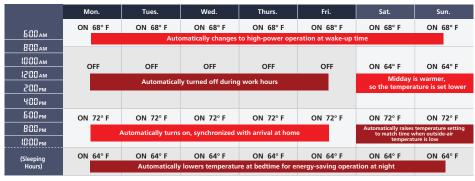

Pattern Settings: Input up to four settings for each day

Settings: Start/Stop operation, Temperature setting
The operation mode cannot be set



Set a Weekly Timer

Start by pushing the "SET" button and following the instructions to set the desired patterns. Once all of the desired patterns are input, point the top end of the remote controller at the indoor unit and push the "SET" button one more time. (Push the "SET" button only after inputting all of the desired patterns into the remote controller memory. Pushing the "CANCEL" button will end the set-up process without sending the operation patterns to the indoor unit). It takes a few seconds to transmit the Weekly Timer operation patterns to the indoor unit. Please continue to point the remote controller at the indoor unit until all data has been sent.

System Control

M-NET Connection

Units can be connected to MELANS system controllers (M-NET controllers) such as the AE-200A.

kumo cloud® Wireless Interface


With your smartphone or tablet device, you can manage your system in multiple venues, such as home, work and vacation locations. You can control functions like turning on/off, fan speed, and vane direction.

MXZ Connection

Connection to the MXZ multi-split outdoor unit is possible.

System Group Control

The same remote controller is capable of controlling the operational status of up to 16 refrigerant systems.

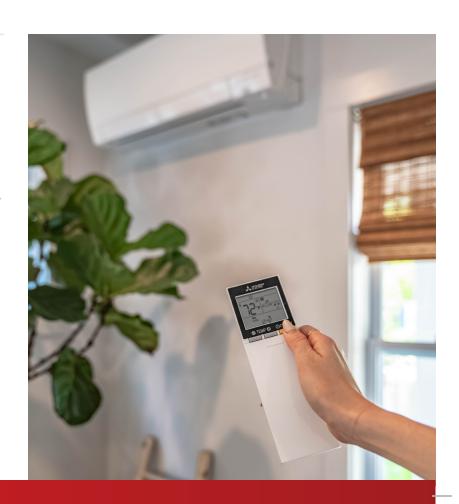



kumo cloud®

kumo cloud gives you the ability to control your home's comfort effortlessly. Whether you're out for the day or out for the month, looking to cool down or warm up, kumo cloud gives you control from any smart device or web browser.



Wireless Router Compatibility

kumo cloud is compatible with most wireless routers, making it easier to integrate into existing wireless networks or switch to a new router.



Program and Schedule

kumo cloud setup walks through a simple process to easily schedule modes, program temperature, and select fan speeds for all zones or one at a time.



Auto Changeover

kumo cloud contains advanced logic to automatically change a multiroom system from cooling to heating and back based on comfort needs.



Compatibility

kumo cloud is compatible with many Mitsubishi Electric systems, including M-Series and P-Series.



Easily Zoned

The kumo cloud app discovers active wireless interface devices.

Once located, each zone can be named and organized into groups.



IFTTT Applet Integration

Expand your heating and cooling system with IFTTT Applet integration. Control transfer fans, lighting and much more.



Simple Setup

Intuitive initial settings and Bluetooth* pairing for easy M-Series and P-Series zone discovery makes it simple to get kumo cloud up and running.



Check Filter Status

You never have to manually check a filter again. kumo cloud can tell you the status of any filter in your system at any time.




Simplified Programming

Easy-to-set scheduling features allow you to manage your system anytime, anywhere for the most efficient operation.



kumo cloud® System Configuration

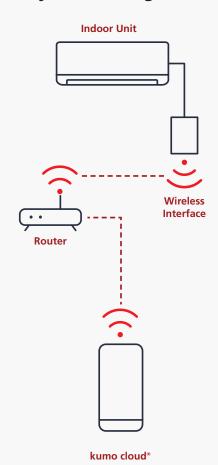











M-Series Capacity Range

	Model	6,000 BTU/H	9,000 BTU/H	12,000 BTU/H	15,000 BTU/H	18,000 BTU/H	24,000 BTU/H	30,000 BTU/H	36,000 BTU/H
	MSZ-FS Model	•	•	•	•	•			
	MSZ-EF Model		•*1	•*1	•*1	•*1			
ted	MSZ-GS (6-24) MSZ-GS (30-36)	•*1	•	•	•	•	•	•	•
Wall-mounted	MSZ-HM Model		•*2	•*2	•*2	•*2	•*2		
	MSZ-JP Model		•*2	•*2					
	MSZ-WR Model		•*2	•*2		•*2	•*2		
	MSY-GS Model (Cooling Only)		•*2	•*2	•*2	•*2	•*2	•*2	•*2
Floor-mounted	MFZ-KJ Model		•	•	•	•			
EZ FIT® Recessed Ceiling Cassette	MLZ Model	•*1	•	•		•			
Horizontal- ducted	SEZ-KD Model		•	•	•	•			•
Ceiling Cassette	SLZ-KF Model		•	•	•	•*2			
Multi-position Air Handler	SVZ Model			•		•	•	•	•

^{*1} MXZ connection only *2 Single-zone connection only

M-Series Features

			M-Series																		
	Catagory	Footure	Indoor Unit		MSZ-F	S06/09	9/12/15	/18NA		MSZ-E	F09/1	2/15/1	BNA(W)(B)(S)	ı	/ISZ-GL	.06/09/	12/15/1	18/24N	A	
	Category	Feature	Outdoor Unit	MUZ-FS	MXZ-2C	MXZ-3C	MXZ-4C	MXZ-5C	MXZ-8C	MXZ-2C	MXZ-3C	MXZ-4C	MXZ-5C	MXZ-8C	MUZ-GL	MXZ-2C	MXZ-3C	MXZ-4C	MXZ-5C	MXZ-SM	
	i-see	Radiant Temperature Cont (3D i-see Sensor®)	perature Control ee Sensor®)	•	•	•	•	•	•												
	Sensor™	AREA Temp	erature Monitor	•	•	•	•	•	•												
	Energy Saving	Eco	no Cool	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	3	Nano Pla	atinum Filter	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
		Cated	hin Filter																		
		Air Cle	aning Filter																		
	Air Quality	Deodo	rizing Filter	•	•	•	•	•	•												
	,	Electrosta Enzy	tic Anti-Allergy me Filter	•	•	•	•	•	•	•	•	•	•	•	24	24	24	24	24	24	
		Anti-Allerg	y Enzyme Filter												06-18	06-18	06-18	06-18	06-18	06-18	
		Air Pur	ifying Filter																		
		Dou	ble Vane	•	•	•	•	•	•												
		Horizo	ontal Vane	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
Functions		Vert	ical Vane	•	•	•	•	•	•						18/24	18/24	18/24	18/24	18/24	18/24	
Funct	Air Distribution	Natural F	ow Operation	•	•	•	•	•	•												
		Wide	e Airflow												24	24	24	24	24	24	
		Indirect/I	Direct Airflow	•	•	•	•	•	•												
		Powerfu	ıl Operation	•	•	•	•	•	•						24	24	24	24	24	24	
		Sm	art Set	•	•	•	•	•	•	•	•	•	•	•	06-18	06-18	06-15	06-18	06-18	06-18	
		Auto	Restart	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
		Low Tempe	erature Cooling	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
	Convenience	Slee	p Mode																		
		12H On/Off	Operation Timer																		
		24H On/Off	Operation Timer	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	
		Wee	kly Timer	•	•	•	•	•	•	•	•	•	•	•							
	Maintenance	ВІ	ue Fin	•			● *1	● *1	•			● *1	● *1	•	•		•	● *1	● *1	•	
	waintenance	Dual Ba	rrier Coating	•																	

^{*1} Branch box units only: MXZ-SM36NAMHZ-U1, MXZ-SM42NAMHZ-U1, MXZ-SM48NAMHZ-U1, MXZ-SM36NAM-U1, MXZ-SM48NAM-U1, and MXZ-SM60NAM-U1 *2 Sea coast protection models only (-BS) Opt: Separate parts must be purchased.

				M-Series																			
MSZ-GS 30/ 36NA	MSZ-HM 09/12/15/ 18/2/NA	MSY-GL 09/12/15/ 18/24NA	MSY-GS 30/ 36NA	MSZ-WR 09/12/ 18/24NA	MSZ-JP 09/ 12WA		MFZ-	KJ09/1	12/15/ ⁻	18NA			MLZ	06/09	9/12/1	8NA		!	SVZ-KF	212/18	3/24/3	0/36N	Ą
	Σ H H					Z-KJ	:-3C	-30	:-4C	5C	-SM	₹	:-2C	3C	:-4C	.5C	-SM	Ϋ́	:-2C	3C	-4C	5C	-SM
WUZ-GS	ми-гим	MUY-GL	MUY-GS	MUZ-WR	AL-ZUM	MUFZ-KJ	MXZ-2C	MXZ-3C	MXZ-4C	MXZ-5C	MXZ-SM	SUZ-KA	MXZ-2C	MXZ-3C	MXZ-4C	MXZ-5C	MXZ-SM	SUZ-KA	MXZ-2C	MXZ-3C	MXZ-4C	MXZ-5C	MXZ-SM
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
		•		•	•	•	•	•	•	•	•												
•			•																				
	•																	•	•	•	•	•	•
		24																					
•	Opt	09-18	•			Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt	Opt						
								- [- 1		- [-	•	•	•	•	•	•						
_		_																					
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
•	18/24		•									•	•	•	•	•	•						
•	24	•																					
•	24	•	18/24			•	•	•	•	•	•												
	06-18					•	•	•	•	•	•	•	•	•	•	•	•						
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•			•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
						•	•	•	•	•	•	•	•	•	•	•	•						
	•																						
•		•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•						
						•	•	•	•	•	•	•	•	•	•	•	•						
	•	•		•	•	•			•* ₁	•* ₁	•	•			•*1	•*1	•	•			•* ₁	•* ₁	•
•																							

MSZ-FS

Wall-mounted Indoor Unit





Deluxe Indoor Unit

The MSZ-FS Deluxe Wall-mounted Indoor Unit features a 3D i-see Sensor® and offers dual vane operation. The unit's interior air duct/vane, coil, and fan features Dual Barrier Coating, which maintains efficiency by keeping the inside clean. The MSZ-FS offers triple filtration, a backlit hand controller, and other premium features.

Capacities: 6,000 to 18,000 BTU/H

Sound: As low as 20 dB(A)

SEER2: Up to 32.2 HSPF2: Up to 11.90 COP: Up to 4.68 ENERGY STAR®: Yes









Dual Barrier Coating

The patented Mitsubishi Electric Dual Barrier Coating prevents dust and dirt from accumulating on the inner surface of the heat pump, keeping your unit clean year-round. Blended fluorine particles prevent hydrophilic dirt penetration, and hydrophilic particles prevent hydrophobic dirt from getting into the heat pump.



3D i-see Sensor®

The 3D i-see Sensor is an infrared-ray sensor that measures temperatures at different positions throughout the space. While scanning the area from left to right, eight vertically arranged sensor elements analyze the room temperature in three dimensions. Based on temperature readings, the sensor detects the location of people in the room.



H2i plus® Hyper-heating **Performance**

H2i plus hyper-heating heat pump technology is leading technology in the industry. The H2i plus outdoor units produce up to 100% heating capacity down to -5° F.



Triple-action Filtration

Our indoor units continuously clean the air of allergens, dust, viruses, and bacteria. Each room's indoor unit is equipped with filters to directly improve your air quality, while the conventional system has only one filter installed in the central unit. The filters are washable and last up to 10 years, which saves you money on maintenance.

MSZ-FS Specifications



To confirm compatibility with the MXZ Model multi-zone system, refer to MXZ Model page.

Indoor Unit				MSZ-FS06NA	MSZ-FS09NA	MSZ-FS12NA	MSZ-FS15NA	MSZ-FS18NA
Outdoor Unit				MUZ-FS06NA	MUZ-FS09NA	MUZ-FS12NA	MUZ-FS15NA	MUZ-FS18NA
AHRI Certified R	Reference Number			209832199	209832201	209832203	209832205	209832207
	Capacity	Rated 1	BTU/H	6,000	9,000	12,000	14,000	17,200
	Capacity Range	Min-Max	BTU/H	MUZ-FS15NA	6,450–21,000			
- "	Power Input	Rated ¹	W	315	560	870	1,000	1,375
Cooling	Moisture Removal	Pints/h		0.2	0.6	1.9	4.0	4.8
	Sensible Heat Factor			0.960	0.920	0.830	0.700	0.690
	Sensible Heat Factor - High Later	nt		_	_	_	_	_
	Capacity at 47°F	Rated ²	BTU/H	8,700	9,600	12,300	16,000	19,000
	Capacity Range	Min-Max	BTU/H	1,600-14,000	1,600–18,000	3,700-21,000	5,150-24,000	5,150-30,000
	Power Input at 47°F	Rated ²	W	545	620	850	1,155	1,610
Heating		Rated ³	BTU/H	5,900	5,900	8,400	10,000	12,800
3	Capacity at 17°F	Max	BTU/H	12,840	14,170	17,410	22,730	27,000
	Capacity at 5°F	Max ⁴	BTU/H	10,500	11.590	14.690	19.360	23.000
	Capacity at -5°F	Max 5	BTU/H	· · · · · · · · · · · · · · · · · · ·	·	·	16.000	19,000
	SEER2			·	·	·		21.0
	EER2							12.5
Efficiency	HSPF2							10.7
	COP						-	3.46
	Air Flow Rate - Cooling	Dry	CFM		-			225–262–304–355–437
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM					194–225–261–305–376
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM				201–272–350–410–514	201–272–350–410–514
	Sound Pressure Level	Cooling	dB(A)	20_23_29_36_40	20_23_29_36_40	21_2/_29_36_//	27_21_25_20_//	27–31–35–39–44
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)					25–31–37–40–46
Indoor Unit	External Static Pressure	ricating	In. W.G.	20 24 25 35 42	20-24-23-33-42		25-51-57-40-40	25-51-57-40-40
	Condensate Lift Mechanism	Max Distance			<u> </u>	_	_	_
	Condensate Life Weenanism	Н	In. [mm]	12 (±11/16) [305 (±17)]	12 (±11/16) [305 (±17)]	12 (±11/16) [305 (±17)]	12 (±11/16) [305 (±17)]	12 (+11/16) [305 (+17)]
	Dimensions	W	In. [mm]					36-7/16 [925]
	Differisions	D	In. [mm]					9-3/16 [234]
	Weight	lbs [kg]	in. pinni					29 [13.5]
	MCA	A A						18.0
	MOCP	A						20
	WIOCF	Н	In. [mm]		-			34-5/8 [880]
	Dimensions	W	In. [mm]					33-1/16 [840]
Outdoor Unit	DIFFERSIONS	D						13 [330]
Outdoor Unit	Weight	lbs [kg]	In. [mm]					
	Air Flow Rate (Cooling/Heating)	CFM						118 [53.5] 1801/1949
	Air Flow Rate (Cooling/Heating)		dB(A)					52
	Sound Pressure Level	Cooling	,		-		-	52
		Heating	dB(A)	·-				
	5.	Gas (O.D.)	In. [mm]					1/2 [12.7]
n: :	Diameter	Liquid (O.D)	In. [mm]					1/4 [6.35]
Piping		Indoor Drain	In. [mm]					5/8 [15.88]
	Max. Length	ft [m]						100 [30]
	Max. Height	ft [m]						50 [15]
Electrical	Outdoor-Indoor 6	V, ph, Hz						208/230, 1, 60
n (: -		Α			-			20
Refrigerant Type		0F DD [**		· · · · · · · · · · · · · · · · · · ·		-		R410A
Guaranteed Temperature	Cooling 7	°F DB [°C DB]		14 to 115	14 to 115	14 to 115	14 to 115	14 to 115
Operation Range	Heating	°F DB [°C DB]						-13 to 75 [-25.0 to -4.0]

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

70 DB, 60 WB // -5 DB, -6 WB

Conditions 'Heating at -5*(Indoor // Outdoor) 'F 70 DB, 60 WB // -5 DE 'Indoor units receive power from outdoor units through field-supplied interconnected wiring.

'Applications should be restricted to comfort cooling only, equipment cooling applications are not recommended for low ambient temperature conditions.

MSZ-FS (NAH) Specifications



To confirm compatibility with the MXZ Model multi-zone system, refer to MXZ Model page.

HSPZ	Indoor Unit				MSZ-FS06NA	MSZ-FS09NA	MSZ-FS12NA	MSZ-FS15NA	MSZ-FS18NA
Capacity Rizer State Stude S	Outdoor Unit				MUZ-FS06NAH	MUZ-FS09NAH	MUZ-FS12NAH	MUZ-FS15NAH	MUZ-FS18NAH
Capacity Range	AHRI Certified F	Reference Number			209832200	209832202	209832204	209832206	209832208
Power lipout Rate of W 315 560 870 1,000 1,375		Capacity	Rated 1	BTU/H	6,000	9,000	12,000	14,000	17,200
Modisture Removal Ristor Seruble New Forcer 1,000 0.		Capacity Range	Min-Max	BTU/H	1,700–9,000	1,700–12,000	2,500-13,600	6,450–19,000	6,450-21,000
Moster Removal Person Pe	- "	Power Input	Rated 1	W	315	560	870	1,000	1,375
Serolik heat Fotor - 1-90 Larent	Cooling	· .	Pints/h	-	0.2	0.6	1.9	4.0	4.8
Capacidy at FP Rated BitUsh 8,700 9,600 12,300 15,000 19,000		Sensible Heat Factor			0.960	0.920	0.830	0.700	0.690
Capacidy at FP Rated BitUsh 8,700 9,600 12,300 15,000 19,000		Sensible Heat Factor - High Latent			_	_	_	_	_
Capacity Range Min-Max BTUM 1,6001-14,000 1,600-18,000 3,700-21,000 5,150-24,000 5,150-24,000 1,155 1,510				BTU/H	8,700	9,600	12,300	16,000	19,000
Power Input at APP Rated W S45 620 830 1,155 1,161		· · ·		BTU/H	1,600–14,000	1,600–18,000	3,700–21,000	5,150–24,000	5,150–30,000
Reading Agrowth Agro			Rated ²	W	545	620	850	1.155	1,610
Capacity at 17P	Heating	·	Rated ³	BTU/H				· · · · · · · · · · · · · · · · · · ·	·
Capacity at 5°F Max BTUH 10,500 11,590 14,690 19,360 23,000	5	Capacity at 17°F	Max	BTU/H			·		
Capacity at -5F Max BTUH 8,700 9,600 12,300 16,000 19,000 10,000 12,300 16,000 10,000 12,300 16,000 12,300 16,000 12,300 16,000 12,300 16,000 12,300 16,000 12,300 16,000 12,300 16,000 12,300 16,000 12,300 16,000 12,300 16,000 12,300		Canacity at 5°F			·	•	·	·	·
SERZ 19.05 16.05 13.8 14.0 12.5			_			·			·
EREZ 19.05 16.05 13.8 14.0 12.5		· ' '	IVIUX	DIOIII		· ·	·		·
HSPE2									
COP	Efficiency								
Air Flow Rate - Cooling (Quiet-Lo-Med-High-Sriigh)									
Couler Lome-Helph-Shigh Met CFM 117-143-190-261-328 117-143-190-261-364 194-225-261-305-376 194			Dny	CEM					
Air Flow Rate (CoolingHeating) Weight lbs [kg] Dimensions W ln [mm] Air Flow Rate (CoolingHeating) Dimensions W ln [mm] Dimensions W ln [mm] Air Flow Rate (CoolingHeating) Cooling dB(A) Dimensions W ln [mm] Dimensions W ln [mm] Air Flow Rate (CoolingHeating) Cooling dB(A) Dimensions W ln [mm] Air Flow Rate (CoolingHeating) Cooling dB(A) Dimensions W ln [mm] Dimensions W ln [mm]									
Clueted-High-Shigh)		Air Flow Rate - Heating							
Dimensions H In. Imm 12 (+11/16) 305 (+17) 305 (+17) 12 (+11/16) 305 (+17) 305 (+1									
External static riessure In. Wo.	Indoor I Init		Heating		20–24–29–39–42	20-24-29-39-42	21–28–32–38–43	25–31–37–40–46	25–31–37–40–46
H In. [mm] 12 (+11/16) [305 (+17)] 36-7116 [925] 36-711116 [925] 36-71116 [925] 36-71116 [925] 36-	indoor offic			-	_	_	_	_	_
Dimensions W In. [mm] 36-7/16 [925]		Condensate Lift Mechanism	_			_	_	_	
D In. Imm 9-3/16 [234] 9-3		Dimensions							
Weight Ibs [kg] 29 [13.5									
MCA A 10.0 10.0 10.0 10.0 18.0 18.0 18.0 18.0				In. [mm]					
MOCP			- 5						
Dimensions H			_						
Dimensions W In. [mm] 31-1/2 [800] 31-1/2 [800] 31-1/2 [800] 33-1/16 [840] 34-1/16 [840] 34-1/16 [840] 34-		MOCP						-	
Dutdoor Unit Weight Ibs kg Sa Sa Sa Sa Sa Sa Sa S									
Weight W		Dimensions				31-1/2 [800]			
Air Flow Rate (Cooling/Heating) CFM 1141/1183 1141/1183 1215/1201 1801/1949 1801/1949 1801/1949 Sound Pressure Level Cooling dB(A) 47 48 49 51 52 55 55 55 55 55 55 55 55 55 55 55 55	Outdoor Unit			In. [mm]		11-1/4 [285]	11-1/4 [285]	13 [330]	13 [330]
Cooling dB(A) 47 48 49 51 52		Weight	lbs [kg]		83 [37.5]	83 [37.5]	84 [38]	118 [53.5]	118 [53.5]
Sound Pressure Level Heating dB(A) 49 49 51 55 55 55		Air Flow Rate (Cooling/Heating	g) CFM			1141/1183	1215/1201	1801/1949	1801/1949
Heating dB(A) 49 49 51 55 55 55 55 55 55 5		Sound Proceure Level	Cooling	dB(A)	47	48	49	51	52
Diameter Liquid (O.D) In. [mm] 1/4 [6.35] 1/4 [6.		Journa Flessure Level	Heating	dB(A)	49	49	51	55	55
Indoor Drain In. [mm] 5/8 [15.88] 5/			Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]
Max. Length ft [m] 65 [20] 65 [20] 65 [20] 100 [30] 100 [30] Max. Height ft [m] 40 [12] 40 [12] 40 [12] 50 [15] 50 [15] Clectrical Recommended Breaker Size V, ph, Hz 208/230, 1, 60 208/230, 1		Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
Max. Height ft [m] 40 [12] 40 [12] 40 [12] 50 [15] 50 [15] Clectrical Recommended Breaker Size V, ph, Hz 208/230, 1, 60 <td>Piping</td> <td></td> <td>Indoor Drain</td> <td>In. [mm]</td> <td>5/8 [15.88]</td> <td>5/8 [15.88]</td> <td>5/8 [15.88]</td> <td>5/8 [15.88]</td> <td>5/8 [15.88]</td>	Piping		Indoor Drain	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
Outdoor-Indoor 6 V, ph, Hz 208/230, 1, 60 208/230,		Max. Length			65 [20]	65 [20]	65 [20]	100 [30]	100 [30]
Recommended Breaker Size A 15 15 15 20 20		Max. Height	+		40 [12]	40 [12]	40 [12]	50 [15]	50 [15]
Recommended Breaker Size A 15 15 15 20 20	Florenies	Outdoor-Indoor 6	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Guaranteed Cooling ⁷	Electrical	Recommended Breaker Size	A		15	15	15	20	20
[emperature Heating FDB [℃DB] 13 to 75 -13 to	Refrigerant Type	e			R410A	R410A	R410A	R410A	R410A
Operation Heating 9 DB (9 DB) 13 to 75 -13 to	Guaranteed	Cooling 7	°F DB [°C DB]		14 to 115	14 to 115	14 to 115	14 to 115	14 to 115
peration Heating "FDB [°CDB] [25.045.40] [25.045.40] [25.045.40] [25.045.40]			05 BE (***		-13 to 75	-13 to 75	-13 to 75	-13 to 75	-13 to 75
	Operation Range	Heating	at DR [₀C DB]						

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor)

70 DB, 60 WB // -5 DB, -6 WB

Conditions ⁵Heating at -5°F (Indoor // Outdoor) ⁶Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

MSZ-EF

Wall-mounted Indoor Unit





Designer Series Indoor Unit

The MSZ-EF Designer Wall-mounted Indoor Units combine sophisticated technology and design. With clean lines and three finish options (glossy black, matte silver, or glossy white), this indoor unit complements various decor and style preferences.

Capacities: 9,000 to 18,000 BTU/H

Sound: As low as 21 dB(A) **ENERGY STAR®:** Most systems



Sleek Design for Any Space

The stylish wall-mounted indoor units have elegant edges, expressing sophistication and quality. The EF Models come in three color options: matte silver, glossy black, or glossy white. The EF Model boasts a modern design coupled with advanced technology, providing low power consumption, quiet operation, and powerful performance, making these units a smart selection.



$| \approx \sum_{i=1}^{\infty} \sum_{j=1}^{\infty} | \sum_{i=1}^{\infty} | \sum_{j=1}^{\infty} | \sum_{j=1}^{\infty} | \sum_{i=1}^{\infty} | \sum_{j=1}^{\infty} | \sum_{i=1}^{\infty} | \sum_{j=1}^{\infty} | \sum_{j=1}^{\infty}$

The Nano Platinum Filter generates stable antibacterial and deodorizing effects. The threedimensional surface enlarges the filter capture area and increases dust collection performance compared to conventional filters.

MSZ-EF Specifications





Color Options Available: Matte Silver, Glossy Black, or Glossy White

For MXZ Connection Only* Soft-dry cloth is enclosed with black models













































	Failure
elf	Recal

Indoor Unit				MSZ-EF09NA(B/W/S)	MSZ-EF12NA(B/W/S)	MSZ-EF15NA(B/W/S)	MSZ-EF18NA(B/W/S)
	Capacity	Rated ¹	BTU/H	_	_	_	_
	Capacity Range	Min-Max	BTU/H	_	_	_	_
Cooling	Power Input	Rated ¹	W	_	_	_	_
Cooling	Moisture Removal	al Pints/h		_	_	_	_
	Sensible Heat Factor			_	_	_	_
	Sensible Heat Factor - High Latent			_	_	_	_
	Capacity at 47°F	Rated ²	BTU/H	_	_	_	_
	Capacity Range	Min-Max	BTU/H	_	_	_	_
	Power Input at 47°F	Rated ²	w	_	_	_	_
Heating		Rated ³	BTU/H	_	_	_	_
	Capacity at 17°F	Max	BTU/H	_	_	_	_
	Capacity at 5°F	Max ⁴	BTU/H	_	_	_	_
	Capacity at -5°F	Max 5	BTU/H	_	_	_	_
	SEER2			_	_	_	_
	EER2			_	_	_	_
Efficiency	HSPF2			_	_	_	_
	COP			_	_	_	_
	Air Flow Rate - Cooling	Dry	CFM	141–162–222–293–371	141–162–222–293–371	205–233–272–314–364	205–240–279–328–388
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	121–140–191–252–319	121–140–191–252–319	176–200–234–270–313	176–206–240–282–334
	Air Flow Rate - Heating	Dry	CFM	141–162–219–314–420	141–162–219–314–448	194–222–275–350–448	226–258–318–392–466
	(Quiet-Lo-Med-High-SHigh)	Cooling	dB(A)	21–23–29–36–42	21–24–29–36–42	28–31–35–39–42	30-33-36-40-43
	Sound Pressure Level (Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	21–23–29–37–45	21–24–29–30–42	28-30-35-41-48	30-33-37-43-49
Indoor Unit	External Static Pressure	rieating	In. W.G.	Z1-24-25-37-43 —	21-24-30-38-40	28-30-33-41-46	30-33-37-43-49
	Condensate Lift Mechanism Max Distance In. [mm				_	_	_
	Condensate Lift Mechanism	H DISTANCE			11 2/4 [200]	11 2/4 [200]	
	5	W	In. [mm]	11-3/4 [299] 34-13/16 [884]	11-3/4 [299] 34-13/16 [884]	11-3/4 [299] 34-13/16 [884]	11-3/4 [299] 34-13/16 [884]
	Dimensions	D	In. [mm]				
	Weight		In. [mm]	7-11/16 [195]	7-11/16 [195]	7-11/16 [195]	7-11/16 [195]
	Weight	lbs [kg]		26 [11.8]	26 [11.8]	26 [11.8]	26 [11.8]
	MCA					_	
	MOCP	A	I. I1	_	_	_	_
	a	H	In. [mm]	-	_	_	_
	Dimensions	W	In. [mm]	_	-	_	_
Outdoor Unit	w	D	In. [mm]	_	_	_	_
	Weight	lbs [kg]		<u> </u>	_	_	_
	Air Flow Rate (Cooling/Heating)	CFM	In(a)	<u> </u>	_	_	_
	Sound Pressure Level	Cooling	dB(A)	-	_	_	_
		Heating	dB(A)	_	_	_	_
		Gas (O.D.)	In. [mm]	_	_	_	_
	Diameter	Liquid (O.D)	In. [mm]		-	_	
Piping		Indoor Drain	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Max. Length	ft [m]		_	-	_	_
	Max. Height	ft [m]		_	_	_	_
Electrical	Outdoor-Indoor 6	V, ph, Hz		_	_	_	_
	Recommended Breaker Size	Α		<u> </u>	-	_	_
Refrigerant Type				_	<u> </u>	_	_
Guaranteed Temperature	Cooling ⁷	°F DB [°C DB]		_	<u> </u>	_	_
Operation Range	Heating	°F DB [°C DB]		_	_	_	_

Notes:

AHRI Rated Conditions | Cooling (Indoor // Outdoor) | F | 80 B, 67 WB // 95 DB, 75 WB (Rated data is determined | Heating at 47°F (Indoor // Outdoor) | F | 70 DB, 60 WB // 47 DB, 43 WB at a fixed compressor speed) | Heating at 17°F (Indoor // Outdoor) | F | 70 DB, 60 WB // 47 DB, 15 WB |

Heating at 5°F (Indoor // Outdoor) | F | 70 DB, 60 WB // 5 DB, 4 WB |

Conditions | Heating at 5°F (Indoor // Outdoor) | F | 70 DB, 60 WB // 5 DB, 6 WB |

Heating at 5°F (Indoor // Outdoor) | F | 70 DB, 60 WB // 5 DB, 6 WB |

Heating at 5°F (Indoor // Outdoor) | F | 70 DB, 60 WB // 5 DB, 6 WB |

Heating at 5°F (Indoor // Outdoor) | F | 70 DB, 60 WB // 5 DB, 6 WB |

Heating at 5°F (Indoor // Outdoor) | F | 70 DB, 60 WB // 5 DB, 6 WB |

Heating at 5°F (Indoor // Outdoor) | F | 70 DB, 60 WB // 5 DB, 6 WB |

Heating at 5°F (Indoor // Outdoor) | F | 70 DB, 60 WB // 5 DB, 6 WB |

Heating at 5°F (Indoor // Outdoor) | F | 70 DB, 60 WB // 5 DB, 6 WB // 5 DB, 6 WB |

Heating at 5°F (Indoor // Outdoor) | F | 70 DB, 60 WB // 5 DB, 6 WB // 5

MSY/Z-GS

Wall-mounted Indoor Unit





Premier Indoor Unit

The MSY/Z-GS Wall-mounted Indoor Unit offers a wide range of sizes, providing the most application solutions. The MSZ-GS indoor unit matches the single-zone heat pump, multi-zone heat pump, or H2i® Hyper-Heating INVERTER® heat pump systems. Its counterpart, the MSY-GS, is a single-zone air conditioner for climates where heating is unnecessary.

Capacities: 6,000 to 24,000 BTU/H

Sound: As low as 19 dB(A)

SEER2: Up to 24.30 **HSPF2**: Up to 10.90 **COP:** Up to 4.44

ENERGY STAR®: Most systems



Extensive Capacity Range

The MSY/Z-GS wall-mounted indoor units offer our highest design flexibility. Combinations include single-zone (cooling only or heat pump) and multizone (heat pump or hyper-heating heat pump) systems, a large selection of size ranges from 6,000 to 36,000 BTU/H.



Powerful Operation

Depending on the capacity, the unit will automatically adjust the fan speed and set temperature for 15 minutes. Rapid cooling and heating will make the room comfortable quickly.

GS24, GS30/36 Models Only



Extensive Capacity Range

The MSY/Z-GS wall-mounted indoor units offer our highest design flexibility. Combinations include single-zone (cooling only or heat pump) and multizone (heat pump or hyper-heating heat pump) systems, a large selection of size ranges from 6,000 to 36,000 BTU/H.



Powerful Operation

Depending on the capacity, the unit will automatically adjust the fan speed and set temperature for 15 minutes. Rapid cooling and heating will make the room comfortable quickly.

GS24, GS30/36 Models Only

MSY/Z-GS Specifications

























































Indoor Unit				MSY-GS09NA	MSY-GS12NA	MSY-GS15NA	MSY-GS18NA	MSY-GS24NA	MSY-GS30NA	MSY-GS36NA
Outdoor Unit				MUY-GS09NA	MUY-GS12NA	MUY-GS15NA	MUY-GS18NA	MUY-GS24NA	MUY-GS30NA	MUY-GS36NA
AHRI Certified Re	eference Number			207679237	207679238	207679239	207679240	207679241	206422453	206422440
unu ceranean	Capacity	Rated ¹	BTU/H	9,000	12,000	14,000	18,000	22,400	30,600	33,200
	Capacity Range	Min-Max	BTU/H	3,600–12,200	1,500–13,600	3,100–18,200	5,800–22,000	8,200–31,400	10,300–30,700	10,300–33,200
	Power Input	Rated ¹	W	585	920	1,100	1,340	1,780	3,320	3,770
Cooling	Moisture Removal	Pints/h		0.8	2.5	2.5	3.8	5.1	7.8	9.3
	Sensible Heat Factor	i iiioiii		0.900	0.800	0.800	0.800	0.800	0.720	0.690
	Sensible Heat Factor - High Latent				_	_	_	_	_	_
	Capacity at 47°F	Rated ²	BTU/H		_	_	_	_	_	_
	Capacity Range	Min-Max	BTU/H		_	_	_	_	_	_
	Power Input at 47°F	Rated ²	W		_	_	_	_	_	_
Heating	Tower input at 47 T	Rated ³	BTU/H		_	_	_	_	_	_
ricating	Capacity at 17°F	Max	BTU/H		_	_		_	_	_
	Capacity at 5°F	Max ⁴	BTU/H		_	_		_		
	Capacity at -5°F	Max 5	BTU/H			_		_		
	SEER2	IVIdX -	вто/п	28.4	25.6	21.0	21.5	21.5	19.2	18.5
Efficiency	EER2			15.4	13.05	12.75	13.45	12.6	9.2	8.8
,	HSPF2				_	_		_	_	_
	COP				<u> </u>			_		_
	Air Flow Rate - Cooling (Quiet-Lo-Med-High-SHigh)	Dry	CFM	134–160–222– 307–381	134–160–222– 307–381	1291–253–316– 400–504	250–325–407– 511–629	361–456–565–701	374–602–699–915	374–602–699–91
		Wet	CFM	121–144–200– 276–343	121–144–200– 276–343	172–228–285– 360–454	225–292–367– 460–566	325-410-509-631	374–602–699–915	374-602-699-91
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	_	_	_	_	_	_	_
	Sound Pressure Level	Cooling	dB(A)	19-22-30-37-43	19-22-30-37-45	26-32-38-44-49	28-33-38-44-49	34-41-47-53	32-42-49-53	32-42-49-53
Indoor Unit	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	_	_	_	_	_	_	_
	External Static Pressure		In. W.G.	_	_	_	_	_	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	_	_	_	_	_	_
	Dimensions	Н	In. [mm]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]	12 [305]	12-13/16 [325]	14-3/8 [365]	14-3/8 [365]
		W	In. [mm]	31-7/16 [798]	31-7/16 [798]	31-7/16 [798]	36-5/16 [923]	43-5/16 [1100]	46-1/16 [1170]	46-1/16 [1170]
		D	In. [mm]	9-1/8 [232]	9-1/8 [232]	9-1/8 [232]	9-13/16 [250]	9-3/8 [238]	11-5/8 [295]	11-5/8 [295]
	Weight	lbs [kg]	[]	23 [10.4]	23 [10.4]	23 [10.4]	28 [12.4]	37 [16.4]	45 [20]	45 [20]
	MCA	Α		10.0	10.0	10.0	12.0	18.0	19.0	19.0
	MOCP	A		15	15	15	15	20	20	20
	Moci	Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]
Outdoor Unit	Difficusions	D	In. [mm]	11-1/4 [285]	11-1/4 [285]	11-1/4 [285]	13 [330]	13 [330]	13 [330]	13 [330]
Outdoor Offic	Weight	lbs [kg]	III. [IIIIII]	79 [35.8]	79 [35.8]	84 [37.8]	119 [53.7]	118 [53.4]	121 [55.0]	121 [55.0]
	Weight			/9 [35.6] —/—	/9 [33.6] —/—	04 [37.6] —/—	—/—	—/—	1974/—	2191/—
	Air Flow Rate (Cooling/Heating	,	-ID/A)							
	Sound Pressure Level	Cooling	dB(A)	48	49	49	54	55	55	56
		Heating	dB(A)							
		Gas (0.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
Piping			In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Max. Length	ft [m]		65 [20]	65 [20]	65 [20]	100 [30]	100 [30]	100 [30]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]	50 [15]	50 [15]	50 [15]
Electrical	Outdoor-Indoor ⁵	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Lictuital	Recommended Breaker Size	A		15	15	15	15	20	20	20
Refrigerant Type				R410A	R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		14 to 115	14 to 115	14 to 115	14 to 115	14 to 115	14 to 115 [-10.0 to 46.0]	14 to 115 [-10.0 to 46.0]
Operation										

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

MSY/Z-GS Specifications















































4				
П	٦.	ìΤ	A	Ī
_	_			







Failure
Recall

Indoor Unit				MSZ-GS06NA	MSZ-GS09NA	MSZ-GS12NA	MSZ-GS15NA	MSZ-GS18NA	MSZ-GS24NA	MSZ-GS30NA	MSZ-GS36NA
Outdoor Unit					MUZ-GS09NA	MUZ-GS12NA	MUZ-GS15NA	MUZ-GS18NA	MUZ-GS24NA	MUZ-GS30NA	MUZ-GS36NA
					207679242	207679243	207679244	207679245	207679246	206422454	206422455
	Capacity	Rated ¹	BTU/H	_	9.000	12,000	14,000	18.000	22,400	30.600	33,200
	Capacity Range	Min-Max	BTU/H	_	3,600–12,200	1,500–13,600	3,100–18,200	5,800–22,000	8,200–31,400	10,300–30,700	10,300–33,200
	Power Input	Rated ¹	W	_	585	920	1,100	1,340	1,780	3,320	3,770
Cooling	Moisture Removal	Pints/h		_	0.8	2.5	2.5	3.8	5.1	7.8	9.3
	Sensible Heat Factor	TIIIO/II			0.900	0.800	0.800	0.800	0.800	0.720	0.690
	Sensible Heat Factor - High Later	nt			0.500		-	-	-	0.720	
	Capacity at 47°F	Rated ²	BTU/H	_	10,900	14.400	18,000	21,600	27,600	32,600	35,200
	Capacity Range	Min-Max	BTU/H		4,500–15,900	2,000–18,100	4,800–20,900	5,400–25,000	7,500–36,900	9,800–34,000	9,800–36,000
	Power Input at 47°F	Rated ²	W		720	1,100	1,600	1,680	2,340	3,340	3,740
Heating	rower input at 47 F	Rated ³	BTU/H	_	6,500	9,000	12,100	13,300	17,600	21,000	22,400
neaung	Capacity at 17°F		BTU/H	_	-						·
	6 '	Max		_	10,200	12,000	16,400	18,200	24,600	20,800	22,800
	Capacity at 5°F	Max ⁴	BTU/H	_	7,900	9,540	14,400	14,780	19,640	18,800	20,500
	Capacity at -5°F	Max ⁵	BTU/H	_		_	_			_	_
	SEER2			_	28.4	25.6	21.0	21.5	21.5	_	_
Efficiency	EER2				15.4	13.05	12.75	13.45	12.6	_	
,	HSPF2				10.9	10.7	11.0	10.3	10.3	_	
	COP	ı			4.44	3.84	3.3	3.77	3.46	2.86	2.76
	Air Flow Rate - Cooling (Quiet-Lo-Med-High-SHigh)	Dry	CFM	_	134–160–222–	134–160–222–	1291–253–316–	250–325–407–	361–456–565–	374–602–699–	374–602–699–
		,			307–381 121–144–200–	307–381 121–144–200–	400–504 172–228–285–	511–629 225–292–367–	701 325–410–509–	915 374–602–699–	915
	(Quiet-Lo-ivied-riigh-Sriigh)	Wet	CFM	_	276–343	276–343	360–454	460–566	631	915	374–602–699– 915
	Air Flow Rate - Heating	_			134–160–222–	134–160–222–	191–231–285–	287–375–459–	336-456-565-	374–602–699–	374–602–699–
	(Quiet-Lo-Med-High-SHigh)	Dry	CFM	_	307–390	307–390	348–437	550–629	701	803	803
		Cooling	dB(A)		19-22-30-	19-22-30-	26-32-38-	28-33-38-	34-41-47-53	32-42-49-53	32-42-49-53
	Sound Pressure Level (Quiet-Lo-Med-High-SHigh)	Cooling	UD(A)		37–43	37–45	44–49	44–49	34-41-47-33	32-42-49-33	32-42-43-33
Indoor Unit		Heating	dB(A)	_	19–22–30–	19–22–30–	26–30–35–	28–34–39–	32-41-47-52	34-42-49-50	34-42-49-50
	Futured Ctetis Deserves		In. W.G.	_	37–43	37–43	40–46	43–48		_	_
				_	_	_	_	_	_	_	_
	Condensate Lift Mechanism	Max Distance									
		H	In. [mm]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]	12 [305]	12-13/16 [325]	14-3/8 [365]	14-3/8 [365]
	Dimensions	W	In. [mm]	31-7/16 [798]	31-7/16 [798]	31-7/16 [798]	31-7/16 [798]	36-5/16 [923]	43-5/16 [1100]	46-1/16 [1170]	46-1/16 [1170]
		D	In. [mm]	9-1/8 [232]	9-1/8 [232]	9-1/8 [232]	9-1/8 [232]	9-13/16 [250]	9-3/8 [238]	11-5/8 [295]	11-5/8 [295]
	Weight	lbs [kg]		23 [10.4]	23 [10.4]	23 [10.4]	23 [10.4]	28 [12.4]	37 [16.4]	45 [20]	45 [20]
	MCA	Α		_	10.0	10.0	10.0	12.0	18.0	19.0	19.0
	MOCP	Α			15	15	15	15	20	20	20
		Н	In. [mm]	_	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	_	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]
Outdoor Unit		D	In. [mm]	_	11-1/4 [285]	11-1/4 [285]	11-1/4 [285]	13 [330]	13 [330]	13 [330]	13 [330]
	Weight	lbs [kg]		_	79 [35.8]	79 [35.8]	84 [37.8]	119 [53.7]	118 [53.4]	121 [55.0]	121 [55.0]
	Air Flow Rate (Cooling/Heating)	CFM		_	<i>—</i> /—	<i>—</i> /—	<i>—</i> /—	<i>—</i> /—	<i>—</i> /—	1974/1950	2191/1950
	Sound Pressure Level	Cooling	dB(A)	_	48	49	49	54	55	55	56
	Sound Pressure Level	Heating	dB(A)	_	50	51	51	55	55	57	57
		Gas (O.D.)	In. [mm]	_	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	_	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
Piping		Indoor Drain	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Max. Length	ft [m]		_	65 [20]	65 [20]	65 [20]	100 [30]	100 [30]	100 [30]	100 [30]
	Max. Height	ft [m]		_	40 [12]	40 [12]	40 [12]	50 [15]	50 [15]	50 [15]	50 [15]
	Outdoor-Indoor 6	V, ph, Hz		_	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	Α		_	15	15	15	15	20	20	20
Refrigerant Type		1			R410A	R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed										14 to 115	14 to 115
Temperature	Cooling 7	°F DB [°C DB]		_	14 to 115	14 to 115	14 to 115	14 to 115	14 to 115	[-10.0 to 46.0]	[-10.0 to 46.0]
Operation	Heating	0E DD [0C DD]			4+- 75	4+- 75	4+- 75	4+- 75	4+- 75	-4 to 75	-4 to 75
	Heating °F DB [°C			_	-4 to 75	-4 to 75	-4 to 75	-4 to 75	-4 to 75	[-20.0 to 24.0]	[-20.0 to 24.0]

Notes:

AHRI Rated Conditions

1 Cooling (Indoor // Outdoor)

2 Heating at 47°F (Indoor // Outdoor)

3 Heating at 47°F (Indoor // Outdoor)

4 Heating at 17°F (Indoor // Outdoor)

4 Heating at 17°F (Indoor // Outdoor)

4 Heating at 17°F (Indoor // Outdoor)

5 TO DB, 60 WB // 47 DB, 43 WB

7 TO DB, 60 WB // 17 DB, 15 WB

7 TO DB, 60 WB // 17 DB, 15 WB

7 TO DB, 60 WB // 5 DB, 4 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

MSY/Z-GS Specifications Indoor Unit















































	1
IT-STAT	1
	3
Optional	





























W	

-			-
٠.	Α.		
ш	-81	IΑ	ш








n.		
	Failure	
1		
9 1	Recal	


Indoor Unit				MSZ-GS09NA	MSZ-GS12NA	MSZ-GS15NA	MSZ-GS18NA	MSZ-GS24NA
Outdoor Unit				MUZ-GS09NAHZ	MUZ-GS12NAHZ	MUZ-GS15NAHZ	MUZ-GS18NAHZ	MUZ-GS24NAHZ
HRI Certified Re	eference Number			207679252	207679253	207679254	207679255	207679256
	Capacity	Rated ¹	BTU/H	9,000	12,000	14,000	18,000	22,400
	Capacity Range	Min-Max	BTU/H	3,600–12,200	1,500–13,600	3,100-18,200	5,800–22,000	8,200-31,400
oling	Power Input	Rated ¹	W	585	920	1,100	1,340	1,780
olling	Moisture Removal	Pints/h		8.0	2.5	2.5	3.8	5.1
	Sensible Heat Factor			0.900	0.770	0.800	0.770	0.750
	Sensible Heat Factor - High La			_	_	_	_	
	Capacity at 47°F	Rated ²	BTU/H	9,600	12,300	14,000	19,000	21,200
	Capacity Range	Min-Max	BTU/H	4,500–15,900	3,600–18,100	4,800–20,900	6,600–25,000	7,500–36,900
	Power Input at 47°F	Rated ²	W	580	830	1,140	1,340	1,540
eating	Capacity at 17°F	Rated ³	BTU/H	5,700	7,600	8,700	11,700	13,300
	' '	Max	BTU/H	11,500	14,700	16,800	22,400	25,400
	Capacity at 5°F	Max ⁴	BTU/H	9,600	12,300	14,000	19,000	21,200
	Capacity at -5°F	Max 5	BTU/H	8,180	10,510	11,910	16,460	18,070
	SEER2			28.4	21.7	21.0	21.5	21.5
	EER2			15.4	13.05	12.75	13.45	12.6
ficiency	HSPF2			9.6	9.6	9.4	9.6	9.0
	СОР			4.85	4.34	3.6	4.16	4.03
	ENERGY STAR® Certified			Yes	Yes	Yes	Yes	Yes
	Air Flow Rate - Cooling	Dry	CFM	134–160–222–307–381	134–160–222–307–381	191-253-316-400-504	250–325–407–511–629	361–456–565–701
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	121-144-200-276-343	121-144-200-276-343	172-228-285-360-454	225-292-367-460-566	325-410-509-631
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	134–160–222–307–390	134–160–222–307–390	191-231-285-348-437	287–375–459–550–629	336-456-565-701
	Sound Pressure Level	Cooling	dB(A)	19-22-30-37-43	19-22-30-37-45	26-32-38-44-49	28-33-38-44-49	34-41-47-53
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	19-22-30-37-43	19-22-30-37-43	26-30-35-40-46	28-34-39-43-48	32-41-47-52
	External Static Pressure		In. W.G.	_	_	_	_	_
door Unit	Condensate Lift Mechanism	Max Distance	In. [mm]	_	_	_	_	_
		Н	In. [mm]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]	12 [305]	12-13/16 [325]
	Dimensions	W	In. [mm]	31-7/16 [798]	31-7/16 [798]	31-7/16 [798]	36-5/16 [923]	43-5/16 [1100]
		D	In. [mm]	9-1/8 [232]	9-1/8 [232]	9-1/8 [232]	9-13/16 [250]	9-3/8 [238]
	Weight	lbs [kg]	1	23 [10.4]	23 [10.4]	23 [10.4]	28 [12.4]	37 [16.4]
	MCA	A		10.0	10.0	10.0	18.0	18.0
	MOCP	Α		15	15	15	20	20
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]	34-5/8 [880]
	Dimensions	w	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]	33-1/16 [840]
utdoor Unit		D	ln.	11-1/4 [285]	11-1/4 [285]	11-1/4 [285]	13 [330]	13 [330]
	Weight	lbs [kg]	[mm]	81 [36]	85 [38]	85 [38]	118 [53]	120 [54]
	Air Flow Rate (Cooling/	CFM		1152/1097	1152/1097	1166/1152	1800/1646	1950/1950
	Heating)	Caaliaa	JD/A)	40	40	40	F4	FF
	Sound Pressure Level	Cooling	dB(A)	48	49	49	54 55	55 55
		Heating Gas (O.D.)	dB(A) In.	50 3/8 [9.52]	51 3/8 [9.52]	51 1/2 [12.70]	1/2 [12.70]	5/8 [15.88]
	Diameter	Liquid (O.D.)	[mm] In.	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
iping	Dialifetei		[mm] In.					
	Mary Lawrett	Indoor Drain	[mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Max. Length	ft [m]		65 [20]	65 [20]	65 [20]	100 [30]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]	50 [15]
ectrical	Outdoor-Indoor 6	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	A		15	15	15	20	20
efrigerant Type				R410A	R410A	R410A	R410A	R410A
uaranteed emperature	Cooling 7	°F DB [°C DB]		14 to 115 [-10.0 to 46.0]				
peration Range	Heating	°F DB [°C DB]		-13 to 75 [-20.0 to 24.0]				

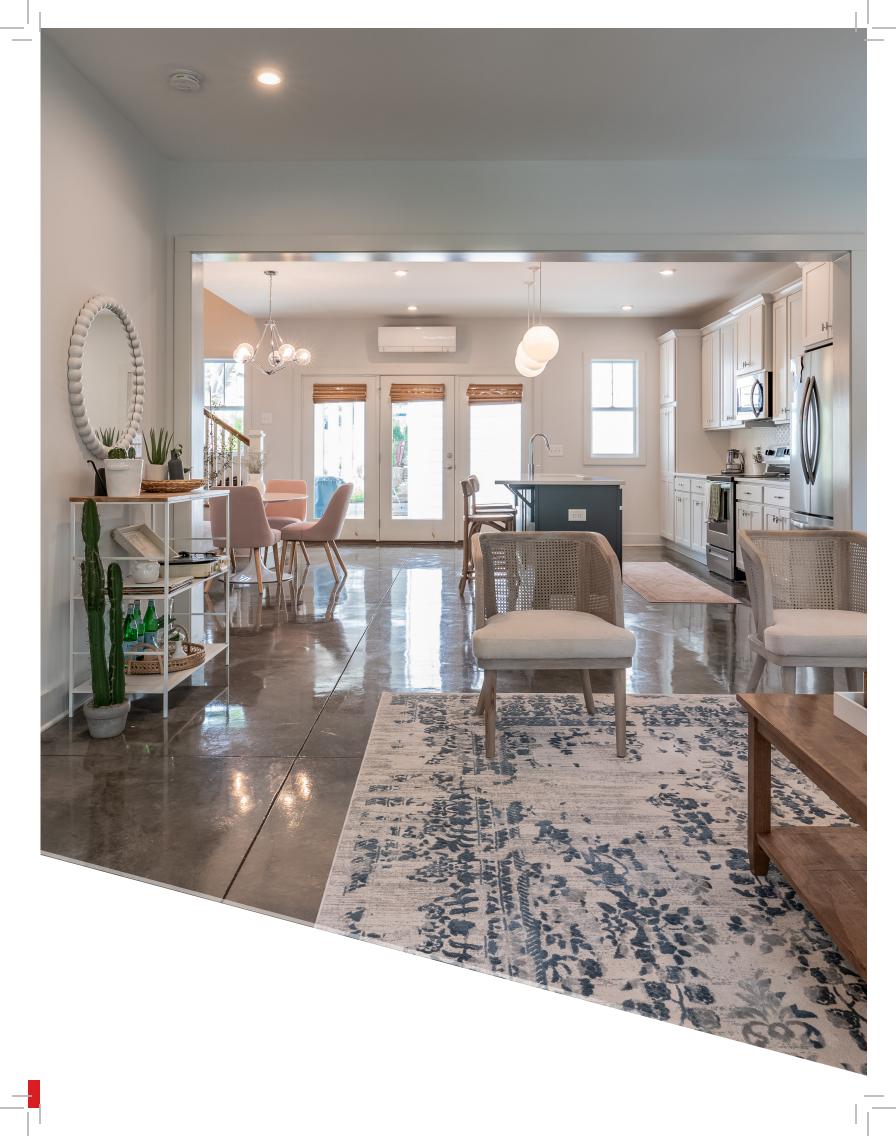

MSZ-HM

Wall-mounted Indoor Unit



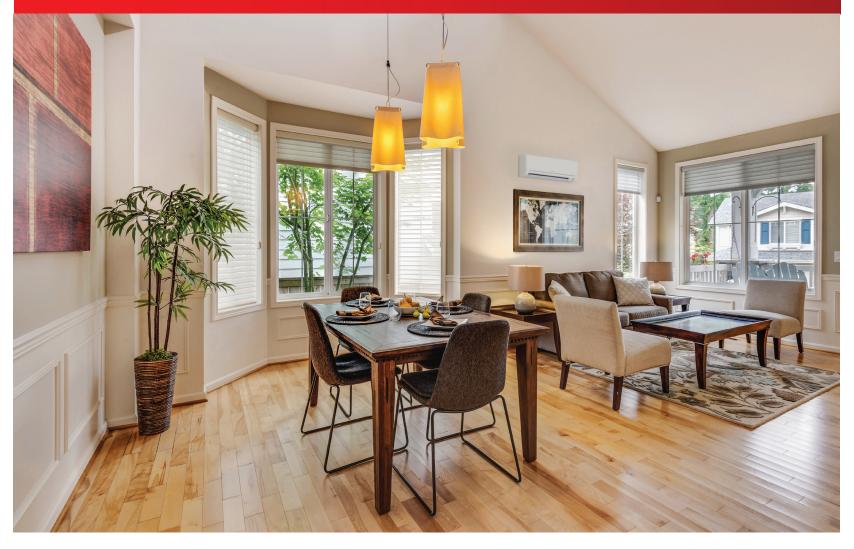

20 SEER Indoor Unit

The MSZ-HM 20 SEER Wall-mounted Indoor Unit pairs with a single-zone heat pump outdoor unit. The MSZ-HM features Econo Cool Energy Savings Mode intelligent temperature control and a stylish flat panel design.

Capacities: 9,000 to 24,000 BTU/H

Sound: As low as 22 dB(A)

SEER2: 20.00 **HSPF2**: 10.00 **COP**: Up to 3.61

ENERGY STAR®: Some systems



Blue Fin Heat Exchanger

Blue Fin is an anti-corrosion coating applied to the heat exchanger of the outdoor unit. This treatment prevents the deterioration of the aluminum fins caused by salt, especially in coastal areas. (Corrosion of the heat exchanger will affect the efficiency and performance of the outdoor unit.)



Anti-allergy Enzyme Air Filter

The base filter can remove dust particles from the air. The anti-allergy enzyme air filter traps allergens such as bacteria and decomposes them using enzymes retained in the filter. The anti-allergy enzyme filter is optional.

MSZ-HM Specifications







































Indoor Unit				MSZ-HM09NA	MSZ-HM12NA	MSZ-HM15NA	MSZ-HM18NA	MSZ-HM24NA
Outdoor Unit				MUZ-HM09NA	MUZ-HM12NA	MUZ-HM15NA	MUZ-HM18NA	MUZ-HM24NA
HRI Certified Reference	an Muumban			202680600	202680601	202680602	202680603	209832269
		Rated ¹	BTU/H	9,000	12,000	14,000	17,200	22,500
Capa	acity Range	Min-Max	BTU/H	3,800–10,000	3,800–12,200	3,100–16,000	5,800–18,000	5,800–22,500
-	er Input	Rated ¹	W	750	1,210	1,170	1,640	2,630
olina	sture Removal	Pints/h	VV	1.5	2.5	2.7	2.1	2,030
	ible Heat Factor	r IIItS/II		0.820	0.770	0.780	0.860	0.890
	ible Heat Factor - High Later	n+		0.020	0.770	20	0.000	0.030
	acity at 47°F	Rated ²	BTU/H	10,900	12,200	18,000	18,000	26,000
	acity Range	Min-Max	BTU/H	4,500–11,800	4,500–14,500	4,800–18,500	5,400–20,900	5,400–26,000
-	er Input at 47°F	Rated ²	W	900	990	1,600	1,590	2,500
eating	er input at 47 i	Rated ³	BTU/H	6,700	7,600	11,500	11,500	18,500
Capa	acity at 17°F	Max	BTU/H	7,200	900	14,000	15,000	18,500
Cana	acity at E0E	Max ⁴	BTU/H	5,990	9,000	12,240	12,780	15,600
	acity at 5°F acity at -5°F	Max 5	BTU/H	5,990	9,000	12,240	12,780	15,600
Capa SEER:		IVIdX -	DIU/H	Unavailable at print	12.0	20.0	19.0	20.0
SEER. EER2						12.0	19.0	20.0 8.6
iciency				Unavailable at print	10.5			
HSPF.				Unavailable at print	8.6 3.61	10.0	9.5 3.32	8.5 3.05
		D	CFM	3.55				
Air Flow Rate - Cooling (Quiet-Lo-Med-High-SHigh) Air Flow Rate - Heating		Dry		170-237-321-399	170-237-321-399	272–335–420–533	328-431-530-625	353-431-530-70
		Wet	CFM	134-201-286-364	134–201–286–364	237–300–385–498	295–388–477–562	318-388-477-63
	et-Lo-Med-High-SHigh)	Dry	CFM	170–237–321–406	170–237–321–406	247–304–367–463	307–431–530–625	346-448-579-70
Sound	nd Pressure Level	Cooling	dB(A)	22-30-37-43	22-30-37-45	32–38–44–49	30–37–42–47	33–38–44–50
	et-Lo-Med-High-SHigh)	Heating	dB(A)	22-30-37-43	22-30-37-43	30-35-40-46	30-37-42-47	32-38-44-50
loor Unit Exter	rnal Static Pressure		In. W.G.	_	_	_	_	_
Cond	densate Lift Mechanism	Max Distance	In. [mm]	_	_	_	_	_
		Н	In. [mm]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]	12 [305]	12 [305]
Dime	ensions	W	In. [mm]	31-7/16 [798]	31-7/16 [798]	31-7/16 [798]	36-5/16 [923]	36-5/16 [923]
		D	In. [mm]	9-1/8 [232]	9-1/8 [232]	9-1/8 [232]	9-13/16 [250]	9-13/16 [250]
Weig	ght	lbs [kg]		22 [10]	22 [10]	22 [10]	28 [13.0]	28 [13.0]
MCA	4	Α		9.0	9.0	10.0	10.0	14.0
MOC	CP CP	Α		15	15	15	15	15
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]
Dime	ensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]
ıtdoor Unit		D	In. [mm]	11-1/4 [286]	11-1/4 [286]	11-1/4 [286]	11-1/4 [286]	13 [330]
Weig	ght	lbs [kg]		73 [33.1]	73 [33.1]	81 [36.7]	81 [36.7]	121 [55]
Air Fl	low Rate (Cooling/Heating)	CFM		1151/1225	1151/1225	1243/1229	1243/1229	1691/1691
C	nd Pressure Level	Cooling	dB(A)	46	49	49	50	54
Soun	ia Pressure Levei	Heating	dB(A)	50	51	51	51	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]
Diam	neter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]
ing		Indoor Drain	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
Max.	. Length	ft [m]		65 [20]	65 [20]	65 [20]	65 [20]	100 [30]
	. Height	ft [m]		40 [12]	40 [12]	40 [12]	40 [12]	50 [15]
Outde	door-Indoor 6	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
ctrical	ommended Breaker Size	A		15	15	15	15	15
frigerant Type				R410A	R410A	R410A	R410A	_
arantood	ling 7	0E DD [0C DD]		14 to 115	14 to 115	14 to 115	14 to 115	14 to 115
mperature	iiiy ·	°F DB [°C DB]		[-10.0 to 46.0]	[-10.0 to 46.0]	[-10.0 to 46.0]	[-10.0 to 46.0]	[-10.0 to 46.0]
peration Heati	tina	°F DB [°C DB]		-4 to 75	-4 to 75	-4 to 75	-4 to 75	-4 to 75
Range	9	. 55 [C 55]		[-20.0 to 24.0]	[-20.0 to 24.0]	[-20.0 to 24.0]	[-20.0 to 24.0]	[-20.0 to 24

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB 70 DB, 60 WB // 5 DB, -6 WB

Notes:

AHRI Rated Conditions 'Cooling (Indoor // Outdoor) 9°F 80 B, 67 WB // 95 Dt
(Rated data is determined 'Heating at 47°F (Indoor // Outdoor) 9°F 70 DB, 60 WB // 47 Dt
at a fixed compressor speed) Heating at 17°F (Indoor // Outdoor) 9°F 70 DB, 60 WB // 17 Dt
Heating at 5°F (Indoor // Outdoor) 9°F 70 DB, 60 WB // 50 DE
Conditions 9°F 70 DB, 60 WB // 50 DE
Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Applications should be restricted to comfort cooling only, equipment cooling applications are not recommended for low ambient temperature conditions.

MSZ-JP

Wall-mounted Indoor Unit





115V Indoor Unit

The MSZ-JP 115V Wall-mounted Indoor Unit pairs with a 115V single-zone heat pump outdoor unit. The MSZ-JP features Econo Cool Energy Savings Mode intelligent temperature control and a stylish flat panel design.

Capacities: 9,000 to 12,000 BTU/H

Sound: As low as 22 dB(A)

SEER2: 20.00 **HSPF2**: 10.00 **COP**: Up to 3.61

ENERGY STAR®: Some systems



Blue Fin Heat Exchanger

Blue Fin is an anti-corrosion coating applied to the heat exchanger of the outdoor unit. This treatment prevents the deterioration of the aluminum fins caused by salt, especially in coastal areas. (Corrosion of the heat exchanger will affect the efficiency and performance of the outdoor unit.)



Econo Cool Energy-saving Feature

Econo Cool is an intelligent temperature control feature that adjusts the amount of air discharged based on the air-outlet temperature. The temperature set point can be raised up to 4° without any loss in comfort, thereby realizing a 20% gain in energy efficiency. Function only available during manual cooling operation.

MSZ-JP Specifications









































	Optional			12 hour	Joint Lap DC Rotary DC Fas Motor Grooved Piping
Indoor Unit				MSZ-JP09WA	MSZ-JP12WA
Outdoor Unit				MUZ-JP09WA	MUZ-JP12WA
AHRI Certified Ref	ference Number			209832210	209832211
	Capacity	Rated ¹	BTU/H	9,000	12,000
	Capacity Range	Min-Max	BTU/H	3,800–10,000	3,800–12,000
	Power Input	Rated ¹	W	750	1,210
Cooling	Moisture Removal	Pints/h		1.5	2.5
	Sensible Heat Factor			0.820	0.770
	Sensible Heat Factor - High Later	nt		_	_
	Capacity at 47°F	Rated ²	BTU/H	10,900	12,200
	Capacity Range	Min-Max	BTU/H	4,500–11,800	4,500–14,500
	Power Input at 47°F	Rated ²	W	900	990
Heating	C	Rated ³	BTU/H	6,700	7,600
	Capacity at 17°F	Max	BTU/H	7,200	9,000
	Capacity at 5°F	Max ⁴	BTU/H	5,990	7,440
	Capacity at -5°F	Max ⁵	BTU/H	_	_
	SEER2			20.0	20.0
Efficiency	EER2			12.0	9.9
Linciency	HSPF2			10.0	9.2
	COP			3.55	3.61
	Air Flow Rate - Cooling	Dry	CFM	170–237–321–399	170–237–321–399
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	134–201–286–364	134–201–286–364
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	170–237–321–406	170–237–321–406
	Sound Pressure Level	Cooling	dB(A)	22–30–37–43	22–30–37–43
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	22–30–37–43	22–30–37–43
Indoor Unit	External Static Pressure		In. W.G.	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	<u> </u>
		Н	In. [mm]	11-5/8 [295]	11-5/8 [295]
	Dimensions	W	In. [mm]	31-7/16 [798]	31-7/16 [798]
		D	In. [mm]	9-1/8 [232]	9-1/8 [232]
	Weight	lbs [kg]		22 [10]	22 [10]
	MCA	Α		12.0	14.0
	MOCP	Α		15	15
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]
Outdoor Unit		D	In. [mm]	11-1/4 [285]	11-1/4 [285]
	Weight	lbs [kg]		73 [33]	73 [33]
	Air Flow Rate (Cooling/Heating)			1105/1225	1105/1225
	Sound Pressure Level	Cooling	dB(A)	46	49
		Heating	dB(A)	46	50
		Gas (0.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]
Piping		Indoor Drain	In. [mm]	5/8 [15.88]	5/8 [15.88]
	Max. Length	ft [m]		65 [12]	65 [12]
	Max. Height	ft [m]		40 [20]	40 [20]
Electrical	Outdoor-Indoor 6	V, ph, Hz		115, 1, 60	115, 1, 60
). (Recommended Breaker Size	Α		15	15
Refrigerant Type				R410A 14 to 115	R410A 14 to 115
Guaranteed Temperature	Cooling ⁷	°F DB [°C DB]		[-10.0 to 46.0]	[-10.0 to 46.0]
Operation Range	Heating	°F DB [°C DB]		-4 to 75 [-20.0 to 24.0]	-4 to 75 [-20.0 to 24.0]

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB

AHRI Rated Conditions

*Cooling (indoor / Outdoor)

*F 80 UB, 6 / WB // 95 UB, 75 WB

(Rated data is determined

*Heating at 47*F (indoor // Outdoor)

*F 70 DB, 60 WB // 47 DB, 43 WB

at a fixed compressor speed)

*Heating at 17*F (indoor // Outdoor)

*Heating at 5*F (indoor // Outdoor)

*F 70 DB, 60 WB // 17 DB, 15 WB

70 DB, 60 WB // 5 DB, 4 WB

Conditions

*Heating at 5*F (indoor // Outdoor)

*F 70 DB, 60 WB // 5 DB, 6 WB

*Heating at 5*F (indoor // Outdoor)


*F 70 DB, 60 WB // 5 DB, 6 WB

*Indoor units receive power from outdoor units through field-supplied interconnected wiring.

*Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

MSZ-WR

Wall-mounted Indoor Unit





18 SEER Indoor Unit

The MSZ-WR 18 SEER Wall-mounted Indoor Unit pairs with a single-zone heat pump outdoor unit. The MSZ-WR features Econo Cool Energy Savings Mode intelligent temperature control and a stylish flat panel design.

Capacities: 9,000 to 24,000 BTU/H

Sound: As low as 22 dB(A)

SEER2: 18.00 HSPF2: 8.50 COP: Up to 3.28 ENERGY STAR®: No



Blue Fin Heat Exchanger

Blue Fin is an anti-corrosion coating applied to the heat exchanger of the outdoor unit. This treatment prevents the deterioration of the aluminum fins caused by salt, especially in coastal areas. (Corrosion of the heat exchanger will affect the efficiency and performance of the outdoor unit.)



Anti-allergy Enzyme Air Filter

The base filter can remove dust particles from the air. The anti-allergy enzyme air filter traps allergens such as bacteria and decomposes them using enzymes retained in the filter. The anti-allergy enzyme filter is optional.

MSZ-WR Specifications











































Indoor Unit				MSZ-WR09NA	MSZ-WR12NA	MSZ-WR18NA	MSZ-WR24NA
Outdoor Unit				MUZ-WR09NA-U2	MUZ-WR12NA-U2	MUZ-WR18NA-U2	MUZ-WR24NA
HRI Certified Refere	ance Number			209832212	209832213	209832270	209832271
		Rated ¹	BTU/H	9.000	12,000	17,200	209832271
	apacity Panga	Min-Max	BTU/H	3,800–10,000	3,800–12,200	5,800–18,000	5,800–22,500
	pacity Range	Rated 1	W W	3,800–10,000 820	1,330	1,720	2,810
olina	wer Input oisture Removal	Pints/h	VV	1.5	2.5	2.1	2,810
_	nsible Heat Factor	PINIS/II		0.820	0.770	0.860	0.890
	nsible Heat Factor - High Later	*		20	20	0.860	0.890
	pacity at 47°F	Rated ²	BTU/H	10,900	12,200	18,000	26,000
— ·		Min-Max	BTU/H	4,500–11,800	4,500–14,500	5,400–20,900	5,400–26,000
<u> </u>	pacity Range	Rated ²	W W	980		· · · · · · · · · · · · · · · · · · ·	2,680
	wer Input at 47°F	Rated ³	BTU/H		1,090	1,670	· · · · · · · · · · · · · · · · · · ·
ating Ca	pacity at 17°F			6,700	7,600	11,500	18,500
	FOF	Max BTU/H Max ⁴ BTU/H		7,200	9,000	15,000	18,500
	pacity at 5°F			5,990	7,440	12,780	15,600
	pacity at -5°F	Max ⁵	BTU/H	-			
_	ER2			18.0	18.0	18.0	18.0
ciency				11.0	9.0	10.0	8.0
, HS	SPF2			8.5	8.5	8.5	8.5
CO		1_		3.25	3.28	3.16	2.84
	r Flow Rate - Cooling	Dry	CFM	170–237–321–399	170–237–321–399	328–431–530–625	353–431–530–702
1.1	uiet-Lo-Med-High-SHigh)	Wet	CFM	134–201–286–364	134–201–286–364	295–388–477–562	318–388–477–632
	r Flow Rate - Heating uiet-Lo-Med-High-SHigh)	Dry	CFM	170–237–321–406	170–237–321–406	307–431–530–625	346–448–579–702
Soi	und Pressure Level	Cooling	dB(A)	22-30-37-43	22-30-37-45	30-37-42-47	33-38-44-50
	uiet-Lo-Med-High-SHigh)	Heating	dB(A)	22-30-37-43	22-30-37-43	30-37-42-47	32-38-44-50
oor Unit Ext	ternal Static Pressure		In. W.G.	_	_	_	_
Co	ondensate Lift Mechanism	Max Distance	In. [mm]	_	_	_	_
		Н	In. [mm]	11-5/8 [295]	11-5/8 [295]	12 [305]	12 [305]
Dir	mensions	W	In. [mm]	31-7/16 [798]	31-7/16 [798]	36-5/16 [923]	36-5/16 [923]
		D	In. [mm]	9-1/8 [232]	9-1/8 [232]	9-13/16 [250]	9-13/16 [250]
We	eight	lbs [kg]		22 [10]	22 [10]	28 [13]	28 [13]
MC	CA	Α		9.0	10.0	9.0	14.0
MO	OCP	Α		15	15	15	15
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]	34-5/8 [880]
Dir	mensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/16 [840]	31-1/16 [840]
door Unit		D	In. [mm]	11-1/4 [286]	11-1/4 [286]	13 [330]	13 [330]
	eight	lbs [kg]		73 [33]	73 [33]	121 [55]	121 [55]
	r Flow Rate (Cooling/Heating)			1151/1225	1243/1229	1151/1225	1691/1691
		Cooling	dB(A)	51	53	48	57
Soi	und Pressure Level	Heating	dB(A)	51	51	50	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	1/2 [12.7]	3/8 [9.52]	5/8 [15.88]
Dia	ameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]
ng			In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
_	ax. Length	ft [m]	[]	65 [12]	65 [12]	65 [12]	100 [15]
	ax. Height	ft [m]		40 [20]	40 [20]	40 [20]	50 [30]
Ou	ax. Height utdoor-Indoor 6	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
trical	commended Breaker Size	ν, μι, πε		15	15	15	15
igerant Type	commenueu breaker 3128	^		R410A	R410A	R410A	R410A
orantood		1		32 to 115	32 to 115	32 to 115	32 to 115
nperature Co	ooling ⁷	°F DB [°C DB]		[-10.0 to 46.0]	[-10.0 to 46.0]	[-10.0 to 46.0]	[-10.0 to 46.0]
eration		0F DD [0C DD]		5 to 75	5 to 75	5 to 75	5 to 75
nge He	eating	°F DB [°C DB]		[-20.0 to 24.0]	[-20.0 to 24.0]	[-20.0 to 24.0]	[-20.0 to 24.0]

Notes:

AHRI Rated Conditions

1 Cooling (Indoor // Outdoor)

4 Heating at 47°F (Indoor // Outdoor)

5 TO DB, 60 WB // 95 DB, 75 WB

(Rated data is determined

4 Heating at 17°F (Indoor // Outdoor)

4 Heating at 17°F (Indoor // Outdoor)

5 TO DB, 60 WB // 17 DB, 15 WB

7 TO DB, 60 WB // 17 DB, 15 WB

7 TO DB, 60 WB // 15 DB, 4 WB

7 TO DB, 60 WB // 5 DB, 4 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

MFZ-KJ

Floor-mounted Indoor Unit



Floor-mounted Indoor Unit

The MFZ-KJ Floor-mounted Indoor Unit mounts low on the wall and can be mounted partially recessed. This indoor unit features rapid heating capability that quickly warms a space to the desired temperature and a multi-flow vane, distributing airflow throughout the room, preventing uneven temperatures.

Capacities: 9,000 to 18,000 BTU/H

Sound: As low as 21 dB(A)

SEER2: Up to 28.70 HSPF2: Up to 11.30 **COP:** Up to 4.30 **ENERGY STAR®: Yes**

Slim Design

The MFZ-KJ low on the wall and has a two-block structure that can accommodate a partially recessed installation. The base can be removed to accentuate the stylish main body.



Multi-flow Vane

Two air streams leave the unit. Part of the supply air discharges upward to heat the room while the other flows down across the floor. The air currents can be controlled freely.





























































	E
_	-

USNAP Optional	ptional Optional Optional	MXZ connection	ning-free, olpe reuse	Flare connection Self Diagnosis Failure Recall	Inverter DC Fan Motor	M Grooved Piping	
Indoor Unit				MFZ-KJ09NA	MFZ-KJ12NA	MFZ-KJ15NA	MFZ-KJ18NA
Outdoor Unit				MUFZ-KJ09NAHZ	MUFZ-KJ12NAHZ	MUFZ-KJ15NAHZ	MUFZ-KJ18NAHZ
AHRI Certified Re	eference Number			210819459	210819460	210819447	210819448
	Capacity	Rated ¹	BTU/H	9.000	12,000	15.000	17.000
	Capacity Range	Min-Max	BTU/H	2,300–14,000	2,300–15,000	5,300–19,000	5,300–22,500
	Power Input	Rated ¹	W	570	890	1,120	1.350
Cooling	Moisture Removal	Pints/h		1.4	2.7	3.9	4.4
	Sensible Heat Factor			0.790	0.700	0.660	0.650
	Sensible Heat Factor - High Later	nt		_	_	_	_
	Capacity at 47°F	Rated ²	BTU/H	11,000	13,000	18,000	21,000
	Capacity Range	Min-Max	BTU/H	2,900–19,000	2,900–22,800	5,700–25,000	5,700–29,000
	Power Input at 47°F	Rated ²	W	750	900	1,410	1,730
Heating	6 1 170	Rated ³	BTU/H	7,500	8,800	12,000	12,800
	Capacity at 17°F	Max	BTU/H	13,400	14,800	20,500	23,000
	Capacity at 5°F	Max ⁴	BTU/H	11,000	13,000	18,000	21,000
	Capacity at -5°F	Max 5	BTU/H	-	-	_	_
	SEER2			28.7	26.7	22.2	22.0
r#:-:	EER2			15.8	13.6	13.5	12.6
Efficiency	HSPF2			11.3	10.6	10.7	10.3
	COP			4.3	4.2	3.7	3.5
	Air Flow Rate - Cooling	Dry	CFM	138-198-272-360-417	138-198-272-360-417	198–254–311–392–431	198-254-328-420-491
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	117–168–231–306–354	117-168-231-306-354	168-216-264-333-366	168-216-279-357-417
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	138–191–254–328–417	138–191–254–328–417	212–268–328–399–470	212–268–328–399–470
	Sound Pressure Level	Cooling	dB(A)	21–27–34–41–46	21-27-34-41-46	28-33-38-43-47	28-33-39-45-50
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	21–27–34–40–46	21–27–34–40–46	29–35–40–45–49	29-35-40-45-49
Indoor Unit	External Static Pressure		In. W.G.	_	<u> </u>	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	<u> </u>	_	
		Н	In. [mm]	23-5/8 [600]	23-5/8 [600]	23-5/8 [600]	23-5/8 [600]
	Dimensions	W	In. [mm]	29-17/32 [750]	29-17/32 [750]	29-17/32 [750]	29-17/32 [750]
		D	In. [mm]	8-15/32 [215]	8-15/32 [215]	8-15/32 [215]	8-15/32 [215]
	Weight	lbs [kg]		33 [15.0]	33 [15.0]	33 [15.0]	33 [15.0]
	MCA	Α		11.0	11.0	16.0	16.0
	MOCP	A		15	15	20	20
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]	33-1/16 [840]
Outdoor Unit		D	In. [mm]	11-1/4 [285]	11-1/4 [285]	13 [330]	13 [330]
	Weight	lbs [kg]		83 [38]	83 [38]	124 [56]	124 [56]
	Air Flow Rate (Cooling/Heating)	CFM	1=/->	1074/1202	1074/1202	1653/1730	1653/1730
	Sound Pressure Level	Cooling	dB(A)	48	48	51	51
		Heating	dB(A)	50	50	55	55
	B	Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]
<u>.</u>	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
Piping	Married Control	Indoor Drain	In. [mm]	5/8 O.D [15]	5/8 O.D [15]	5/8 O.D [15]	5/8 O.D [15]
	Max. Length	ft [m]		65 [20]	65 [20]	100 [30]	100 [30]
	Max. Height Outdoor-Indoor 6	ft [m] V, ph, Hz		40 [12] 208/230, 1, 60	40 [12] 208/230, 1, 60	50 [15] 208/230, 1, 60	50 [15] 208/230, 1, 60
Electrical	Recommended Breaker Size	v, pn, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Refrigerant Type		М		R410A	R410A	20 R410A	R410A
Guaranteed				14 to 115	14 to 115	14 to 115	14 to 115
Temperature Operation	Cooling ⁷	°F DB [°C DB]		[-10.0 to 46.0]	[-10.0 to 46.0] -13 to 75	[-10.0 to 46.0]	[-10.0 to 46.0]
Range	Heating	°F DB [°C DB]		-13 to 75 [-25.0 to 24.0]	[-25.0 to 24.0]	-13 to 75 [-25.0 to 24.0]	-13 to 75 [-25.0 to 24.0]

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

Notes:

AHRI Rated Conditions

1 Cooling (Indoor // Outdoor)

2 Heating at 47°F (Indoor // Outdoor)

3 Heating at 17°F (Indoor // Outdoor)

4 Heating at 17°F (Indoor // Outdoor)

4 Heating at 17°F (Indoor // Outdoor)

4 Heating at 5°F (Indoor // Outdoor)

5 70 DB, 60 WB // 47 DB, 43 WB

7 0 DB, 60 WB // 17 DB, 15 WB

7 0 DB, 60 WB // 5 DB, 4 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 6 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB // 5 DB, 60 WB

7 0 DB, 60 WB //

SUZ Models

Universal Outdoor Unit





Universal Heat Pump

The SUZ Universal Heat Pump is an outdoor unit compatible with five different indoor unit types in a 1-to-1 configuration. This high-efficiency heat pump is compatible with MLZ EZ FIT Ceiling Cassettes, SLZ Four-way Ceiling Cassettes, SVZ Multiposition Air Handlers, SEZ Low Static intelli-AIR™ Ducted Solutions, and PEAD Mid Static intelli-AIR™ Ducted Solutions.

Capacities: 9,000 to 36,000 BTU/H

Sound: As low as 48 dB(A)

SEER2: Up to 24.00 HSPF2: Up to 11.90 **COP:** Up to 3.90

ENERGY STAR®: Most systems



Powerful Compressor

Manufacturing with the Heat Caulking Fixing Method reduces compressor size while maintaining a high compressor output. This technology enables the installation of a more powerful compressor in compact outdoor units. As a result, it is possible to achieve excellent heating performance while operating in cold outdoor environments.



Hyper-heating INVERTER®

The H2i® models provide heating even when it's -13° F (-25° C) outdoors, producing up to 100% heating capacity at 5° F (-15° C). These units offer year-round comfort even in extreme climates.

System Compatibility





Unit Compatibility

Outdoor Un	it Capacity BTU/H	!	9	1	2	1	5	1	8	2	.4	3	0	3	86
Model	Туре	HP	K i	НР	K i	HP	K i	HP	K i	НР	Ki	НР	K i	НР	K
SLZ-KF	Two-way Cassette	•	•	•	•	•	•	•	•						
SEZ-KD	Low-static Ducted	•	•	•	•	•	•	•	•						
PEAD	Mid-static Ducted	•	•	•	•	•	•	•	•	•	•	•	•	•	•
SVZ	Multi-position Air Handler			•	•			•	•	•	•	•	•	•	•
MLZ-KP	EZ FIT® Recessed Ceiling Cassette	•	•	•	•			•	•						

Available capacities in BTU/H: 9, 12, 15, 18, 24, 30, 36. Single-zone outdoor unit matches multiple indoor unit options Heat Pump or Hyper-Heating INVERTER®

Heating Performance at Low Temperatures

						'	•						
SUZ-KA09N	IAHZ					SUZ-KA18	NAHZ						
COP at	SLZ	SEZ	PEAD	MLZ		COP at	SLZ	SEZ	PEAD	SVZ	MLZ		
47° F	3.90	2.80	3.80	4.10		47° F	3.40	3.90	3.30	3.30	3.00		
17° F	2.56	2.20	2.56	2.76		17° F	2.10	2.00	2.49	2.32	2.42		
5° F	1.34	1.59	1.67	1.67		5° F	1.75	1.75	1.66	1.75	1.39		
SUZ-KA12N	IAHZ					SUZ-KA1	NAHZ			SUZ-	KA24NA	HZ	
COP at	SLZ	SEZ	PEAD	SVZ	MLZ	COP at	SLZ	SEZ	PEAD	CC	P at	PEA)
47° F	3.40	3.90	3.90	3.80	3.80	47° F	2.60	2.70	3.00	4	7° F	3.80	
17° F	2.38	2.56	2.72	2.61	2.54	17° F	1.91	2.15	2.29	1	7° F	2.1	0
5° F	1.83	2.19	2.09	1.69	1.57	5° F	1.84	1.88	1.81		5° F	1.7	5

MLZ-KP/Y

Recessed Ceiling Cassette





EZ FIT® Recessed Indoor Unit

The MLZ-KP EZ FIT® Ceiling Cassette recesses between the ceiling joists, providing a clean flush-mount appearance. The slim body design fits into shallow ceiling cavities, making the EZ FIT a popular selection for room upgrades or new construction projects. High/low ceiling airflow settings and automatic vane control personalize room comfort.

Capacities: 6,000 to 18,000 BTU/H

Sound: As low as 21 dB(A)

SEER2: Up to 22.90 HSPF2: Up to 11.90 COP: Up to 4.10 ENERGY STAR®: Yes







Ceiling Recessed

The EZ FIT® flush-mount design creates a more spacious feeling in the room. The recessed-ceilingcassette indoor unit style provides a solution when wall space is limited or not available.



Slim Design

The MLZ-KP and MLZ-KY EZ FIT Ceiling Cassette recesses between the ceiling joists to provide a clean flush-mount appearance. With the EZ FIT's slim body design, installation is easy, even with shallow ceiling cavities. The EZ FIT is easily serviced from the bottom without the need to remove the grille.



Auto-vane Control

Outlet vanes can be moved left and right, and up and down, using the remote controller. This improved airflow control feature eliminates drafts.



Built-in Weekly Timer Function

Easily set desired temperatures and operation ON/OFF times to match lifestyle patterns. Reduce wasted energy consumption by using the timer to prevent forgetting to turn off the unit and eliminate temperature setting adjustments.

MLZ Specifications







































































Requires MLP-444W grille or MLP-448WU grille. MLZ-KY is multi-zone only.

Indoor Unit				MLZ-KY06NA	MLZ-KP09NA2	MLZ-KP12NA2	MLZ-KP18NA2
Outdoor Unit					SUZ-KA09NA2	SUZ-KA12NA2	SUZ-KA18NA2
					207699119	207699122	207699125
Capa	acity	Rated ¹	BTU/H	_	9.000	12.000	18.000
	acity Range	Min-Max	BTU/H	_	3,600–9,000	3,900–12,000	6,600–18,000
Pow	ver Input	Rated ¹	W	_	710	960	1,440
nolina		Pints/h		_	1.5	2.8	5.3
	sible Heat Factor			_	0.820	0.740	0.670
	sible Heat Factor - High Laten	nt		_	_	_	_
	acity at 47°F	Rated ²	BTU/H	_	12,000	15,400	20,000
	acity Range	Min-Max	BTU/H	_	4,010–13,000	4,600–17,000	8,200–22,800
	ver Input at 47°F	Rated ²	W	_	860	1,300	1,170
eating	ver input ut 47 1	Rated ³	BTU/H	_	7,700	9,900	13,100
Capa	acity at 17°F	Max	BTU/H	_	8,300	10,900	14,900
Can	acity at 5°F	Max ⁴	BTU/H		6,100	7,900	10,700
	,	Max 5	BTU/H		6,100 —	7,900	10,700
SEEF		IVIDX -	חוטומ	_	20.2		22.9
						21.7	
iciency					12.6	12.2	12.5
HSP				_	11.9	10.9	10.5
СОР			CELL	-	3.2	3.4	3.3
		Dry	CFM	152–166–184–198	212–254–282–311	212–258–297–332	212–293–346–403
		Wet	CFM	129–141–156–168	180–216–240–264	180–219–252–282	180–249–294–343
	Flow Rate - Heating iet-Lo-Med-High-SHigh)	Dry	CFM	152–173–194–212	212–247–290–325	212–272–311–350	212–311–364–417
Sour	nd Pressure Level	Cooling	dB(A)	29–31–34–36	27–31–34–38	27–32–36–40	29–36–41–47
	iet-Lo-Med-High-SHigh)	Heating	dB(A)	29–32–35–37	26–29–34–37	26–32–36–40	26-37-42-48
door Unit Exte	ernal Static Pressure		In. W.G.	_	_	_	_
Cone	densate Lift Mechanism	Max Distance	In. [mm]	19-11/16 [500]	19-11/16 [500]	19-11/16 [500]	19-11/16 [500]
		Н	In. [mm]	7-11/16 [194]	7-5/16 [185]	7-5/16 [185]	7-5/16 [185]
Dime	nensions	W	In. [mm]	33-3/16 [842]	43-3/8 [1,102]	43-3/8 [1,102]	43-3/8 [1,102]
		D	In. [mm]	11-7/8 [301]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]
Weig	ight	lbs [kg]		24.3 [11.0]	34 [15.5]	34 [15.5]	35 [16]
MCA	A	A		_	9.0	9.0	14.0
MOG	CP	A		_	15	16	24
		Н	In. [mm]	_	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]
Dime		W	In. [mm]	_	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]
ıtdoor Unit		D	In. [mm]	_	11-1/4 [285]	11-1/4 [285]	13 [330]
Wei	ight	lbs [kq]		_	81 [37]	81 [37]	127 [58]
	J	CFM		_	1229/1172	1229/1172	1691/1691
	. 5	Cooling	dB(A)	_	48	54	54
Sour	nd Pressure Level	Heating	dB(A)	_	50	55	55
		Gas (O.D.)	In. [mm]	_	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]
Dian	meter	Liquid (O.D)	In. [mm]	_	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
oing		Indoor Drain		1-1/16 [26]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
-	x. Length	ft [m]	are femind	- 1,10 [20]	65 [20]	65 [20]	100 [30]
	x. Lengur x. Height	ft [m]			40 [12]	40 [12]	50 [15]
	door-Indoor ⁶	V, ph, Hz		_	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
ctrical				_	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	ommended breaker SiZe	Α				·	-
efrigerant Type	I				R410A 14 to 115	R410A 14 to 115	R410A 14 to 115
uaranteed emperature	ling ⁷	°F DB [°C DB]		_	[-10.0 to 46.0]	[-10.0 to 46.0]	[-10.0 to 46.0]
neration					-4 to 75	-4 to 75	-4 to 75
ange Heat	iting	°F DB [°C DB]		_	[-20.0 to 24.0]	[-20.0 to 24.0]	[-20.0 to 24.0]

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

Notes:

AHRI Rated Conditions

Cated data is determined

AHRI Rated Compressor speed)

Pleating at 47°F (Indoor // Outdoor)

Practical at a fixed compressor speed)

Pleating at 17°F (Indoor // Outdoor)

Practical at 18°F (Indoor // Outdoor)

Practical

MLZ Specifications

















































Indoor Unit				MLZ-KY06NA	MLZ-KP09NA2	MLZ-KP12NA2	MLZ-KP18NA2
Outdoor Unit					SUZ-KA09NAHZ	SUZ-KA12NAHZ	SUZ-KA18NAHZ
					204627031	204627032	204627034
Cai	apacity	Rated ¹	BTU/H	_	9.000	12,000	16,700
_	apacity Range	Min-Max	BTU/H	_	4,800–9,000	5,270–12,000	8,740–16,700
Pov	ower Input	Rated ¹	W	_	720	940	1,335
olina 🗀	oisture Removal	Pints/h	1	_	1.8	3.1	5.1
	nsible Heat Factor	Tittom		<u> </u>	0.780	0.710	0.660
	nsible Heat Factor - High Late	nt		<u> </u>	—	_	_
	apacity at 47°F	Rated ²	BTU/H	<u> </u>	12,000	15,000	18,600
_	apacity Range	Min-Max	BTU/H		8,300–14,000	7,800–18,000	8,500–22,000
	ower Input at 47°F	Rated ²	W	_	840	1,130	1,780
ating	mer input ut 47 1	Rated ³	BTU/H		6,600	9,100	11,800
Ca	apacity at 17°F	Max	BTU/H		12,000	15,000	18,600
Car	procity at 5°E	Max ⁴	BTU/H		12,000	15,000	18,600
	apacity at 5°F apacity at -5°F	Max 5	BTU/H		12,000	15,000	18,600
	ER2	IVIDX -	Б10/П		20.5	20.8	19.2
-	:EKZ :R2						-
riency				_	15.0	12.7	12.5
	SPF2				9.0	9.0	8.5
CO		_	cr	-	4.1	3.8	3.0
	r Flow Rate - Cooling	Dry	CFM	152–166–184–198	212–254–282–311	212–258–297–332	212–293–346–403
	uiet-Lo-Med-High-SHigh)	Wet	CFM	129–141–156–168	180–216–240–264	180–219–252–282	180-249-294-343
	r Flow Rate - Heating Juiet-Lo-Med-High-SHigh)	Dry	CFM	152–173–194–212	212–247–290–325	212–272–311–350	212–311–364–417
Soi	ound Pressure Level	Cooling	dB(A)	29–31–34–36	27–31–34–38	27–32–36–40	29–36–41–47
(Quiet-Lo-Med-Hi	uiet-Lo-Med-High-SHigh)	Heating	dB(A)	29–32–35–37	26–29–34–37	26–32–36–40	26-37-42-48
	ternal Static Pressure		In. W.G.	_	_	_	_
Co	ondensate Lift Mechanism	Max Distance	In. [mm]	19-11/16 [500]	19-11/16 [500]	19-11/16 [500]	19-11/16 [500]
		Н	In. [mm]	7-11/16 [194]	7-5/16 [185]	7-5/16 [185]	7-5/16 [185]
Dir	mensions	W	In. [mm]	33-3/16 [842]	43-3/8 [1,102]	43-3/8 [1,102]	43-3/8 [1,102]
		D	In. [mm]	11-7/8 [301]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]
We	eight	lbs [kg]		24.3 [11.0]	34 [15.5]	34 [15.5]	35 [16]
MC	CA	Α		_	14.0	14.0	17.0
MO	OCP	Α		_	24	24	31
		Н	In. [mm]	_	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]
Dir	mensions	W	In. [mm]	_	38-1/16 [840]	33-1/16 [840]	33-1/16 [840]
door Unit		D	In. [mm]	_	13 [330]	13 [330]	13 [330]
	eight	lbs [kq]	- 1	_	129 [58.5]	129 [58.5]	131 [59.5]
	r Flow Rate (Cooling/Heating)	- 5-		_	1,691/1,691	1,691/1,691	2,020/1,930
	. , , ,	Cooling	dB(A)	_	49	54	55
Soi	ound Pressure Level	Heating	dB(A)	_	51	55	55
		Gas (O.D.)	In. [mm]	_	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]
Dia	ameter	Liquid (O.D)	In. [mm]	_	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
ng		Indoor Drain		1-1/16 [26]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
-	ax. Length	ft [m]	are frigural	1-1/10 [20]	65 [20]	65 [20]	100 [30]
	ax. Height	ft [m]	-		40 [12]	40 [12]	50 [15]
	ах. неignt utdoor-Indoor ⁶	π [m] V, ph, Hz		<u> </u>	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
trical				<u> </u>	, ,		
	ecommended Breaker Size	А			15	15	20
rigerant Type					R410A 14 to 115	R410A	R410A
aranteed nperature	ooling ⁷	°F DB [°C DB]		_	14 to 115 [-18.0 to 46.0]	14 to 115 [-18.0 to 46.0]	14 to 115 [-18.0 to 46.0]
eration					-13 to 75	-13 to 75	-13 to 75
nge He	eating	°F DB [°C DB]		_	[-25.0 to 24.0]	[-25.0 to 24.0]	[-25.0 to 24.0]

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

Notes:

AHRI Rated Conditions

1 Cooling (Indoor // Outdoor)

2 Heating at 47°F (Indoor // Outdoor)

3 Heating at 47°F (Indoor // Outdoor)

4 Heating at 17°F (Indoor // Outdoor)

4 Heating at 17°F (Indoor // Outdoor)

5 TO DB, 60 WB // 47 DB, 43 WB

7 TO DB, 60 WB // 17 DB, 15 WB

7 TO DB, 60 WB // 17 DB, 15 WB

7 TO DB, 60 WB // 5 DB, 4 WB

7 TO DB, 60 WB // 5 DB, 4 WB

7 TO DB, 60 WB // 5 DB, 4 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB

SVZ

Multi-position Air Handler



Multi-position Air Handler

The SVZ Multi-position Air Handler, part of the intelli-AIR™ family, boasts best-in-class construction with a durable black ZAM finish, 1" R4.2 insulation, and low cabinet leakage. The highly efficient EC motor features three different static pressure settings. Optional electric heat kits are available. This air handler unit features a built-in humidifier, ERV, and auxiliary heat control inputs.

Capacities: 12,000 to 36,000 BTU/H

Sound: As low as 29 dB(A)

SEER2: Up to 20.70 **HSPF2**: Up to 10.70 **COP:** Up to 4.20

ENERGY STAR®: Most systems



Best in Class

The SVZ is an ideal replacement for traditional forced-air systems or adding to new additions, with a durable black ZAM finish, 1" R4.2 insulation, and low cabinet leakage. The highly efficient EC motor features three different static pressure settings. Optional electric heat kits are available. This air handler unit features a built-in humidifier, ERV, and auxiliary heat control inputs.



$Q_{\widetilde{Q}}$ Small Footprint

This air handler's compact design makes it possible to replace existing furnaces or air handlers. Choose either a single-zone or multi-zone system. Hybrid multi-zone applications provide a unique approach to solving zoning problems by mixing ducted and ductless indoor units.

SVZ Specifications



























T-STAT MXZ
To confirm compatibility with the multi-zone system, refer to multi-zone model page.

Indoor Unit				SVZ-KP12NA	SVZ-KP18NA	SVZ-KP24NA	SVZ-KP30NA	SVZ-KP36NA
Outdoor Unit				SUZ-KA12NA2	SUZ-KA18NA2	SUZ-KA24NA2	SUZ-KA30NA2	SUZ-KA36NA2
HRI Certified Re	ference Number			207699122	207699125	202392024	202392025	202392026
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	27,000	33,400
	In Certified Reference Number Capacity Capacity Range Power Input Moisture Removal Sensible Heat Factor Sensible Heat Factor - High Late Capacity Range Power Input at 47°F Capacity Range Power Input at 47°F Capacity at 17°F Capacity at 5°F Capacity at -5°F SEER2 EER2 HSPF2 COP Air Flow Rate - Cooling (Quiet-Lo-Med-High-SHigh) Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh) Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh) External Static Pressure Condensate Lift Mechanism Dimensions Weight MCA MOCP Dimensions Weight Air Flow Rate (Cooling/Heating Sound Pressure Level Diameter Max. Length Max. Length Max. Length Max. Length Max. Length Recommended Breaker Size gerant Type	Min-Max	BTU/H	4,300–12,000	6,200–18,000	12,400–24,000	13,500–27,000	11,600–33,400
		Rated ¹	w	940	1,360	1,920	2,160	3,711
oling		Pints/h		1.2	2.4	4.1	2.4	4.7
	Sensible Heat Factor			0.890	0.850	0.810	0.900	0.840
	Sensible Heat Factor - High Later	nt		20	20	20	20	20
	Capacity at 47°F	Rated ²	BTU/H	15,000	21,600	25,300	30,000	33,400
	Capacity Range	Min-Max	BTU/H	4,700–16,700	8,300–26,000	14,600–28,000	12,640-33,000	13,260–36,000
	Power Input at 47°F	Rated ²	W	1,210	1,600	1,910	2,060	3,030
ating	6 : .4705	Rated ³	BTU/H	9,900	14,000	14,600	21,400	23,200
	Capacity at 17%	Max	BTU/H	9,900	14,000	14,600	21,400	23,200
	Capacity at 5°F	Max ⁴	BTU/H	7,800	12,200	_	_	_
	Capacity at -5°F	Max 5	BTU/H	_	_	_	_	_
				21.7	22.9	17.9	19.9	16.0
				12.2	12.5	11.6	11.3	8.5
iciency	HSPF2			10.9	10.5	8.3	10.6	9.5
	COP			3.6	3.9	3.8	4.2	3.2
	Air Flow Rate - Cooling	Dry	CFM	278–381–448	471–573–675	515–625–735	613–744–875	767–910–910
		Wet	CFM	_	_	_	_	_
5		Dry	CFM	278–381–448	471–573–675	515–625–735	613–744–875	767–910–910
	Sound Pressure Level	Cooling	dB(A)	29-36-39	33–36–41	33-36-41	32-37-41	35-40-42
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	29-36-39	33–36–41	33-36-41	32-37-41	35-40-42
loor Unit	External Static Pressure		In. W.G.	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	_	_	_	_
		Н	In. [mm]	39-13/16 [1011]	39-13/16 [1011]	39-13/16 [1011]	43-3/4 [1111]	43-3/4 [1111]
	Dimensions	W	In. [mm]	17 [432]	17 [432]	17 [432]	21 [533]	21 [533]
		D	In. [mm]	21-5/8 [549]	21-5/8 [549]	21-5/8 [549]	21-5/8 [549]	21-5/8 [549]
	Weight	lbs [kg]		93 [42]	93 [42]	93 [42]	119 [54]	119 [54]
	MCA	Α	9.0		14.0	17.0	17.0	17.0
	MOCP	Α		16	24	31	31	31
		Н	In. [mm]	21-5/8 [550]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]
tdoor Unit		D	In. [mm]	11-1/4 [285]	13 [330]	13 [330]	13 [330]	13 [330]
	Weight	lbs [kg]		81 [37]	127 [58]	129 [59]	129 [59]	129 [59]
	Air Flow Rate (Cooling/Heating)	CFM		1229/1172	1691/1691	2020/1930	2020/1930	2020/1930
	Sound Proceura Loval	Cooling	dB(A)	54	54	55	55	55
	Journa Fressure Level	Heating	dB(A)	55	55	55	55	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
ing		Indoor Drain	In. [mm]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]
	Max. Length	ft [m]		65 [20]	100 [30]	100 [30]	100 [30]	100 [30]
	Max. Height	ft [m]		40 [12]	50 [15]	100 [30]	100 [30]	100 [30]
ctrical	Outdoor-Indoor ⁶	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
culcai	Recommended Breaker Size	Α		15	15	20	20	20
frigerant Type				R410A	R410A	R410A	R410A	R410A
ıaranteed	Cooling 7	°F DB [°C DB]		14 to 115				
mperature		(0 0 0)		[-10.0 to 46.0]				
peration	Heating	°F DB [°C DB]		-4 to 75 [-20.0 to 24.0]	-4 to 75 [-20.0 to 24.0]	14 to 75 [-10.0 to 24.0]	14 to 75 [-10.0 to 24.0]	14 to 75 [-10.0 to 24.0]

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)

80 DB. 67 WB // 95 DB. 75 WB

AHRI Rated Conditions

Cooling (Indoor // Outdoor)

Rate data is determined

Aleating at 17°F (Indoor // Outdoor)

Aleating at 5°F (Indoor // Outdoor)

Alea

SVZ Specifications





Outdoor Unit



SUZ-KA12/18NAHZ

SUZ-KA24NAHZ

SUZ-KA30/36NAHZ





















To confirm compatibility with the multi-zone system, refer to multi-

Indoor Unit				SVZ-KP12NA	SVZ-KP18NA	SVZ-KP24NA	SVZ-KP30NA	SVZ-KP36NA
Outdoor Unit				SUZ-KA12NAHZ	SUZ-KA18NAHZ	SUZ-KA24NAHZ	SUZ-KA30NAHZ	SUZ-KA36NAHZ
AHRI Certified Re	eference Number			204627032	204627034	206223008	206223009	206223010
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	27,000	36,000
	Capacity Range	Min-Max	BTU/H	5.600–12.000	9,360–18,000	8,800–24,000	13,400–27,000	14,200–36,000
	Power Input	Rated ¹	W	860	1,440	2,420	2,100	3,760
oling	Moisture Removal	Pints/h		0.8	1.1	4.7	4.1	8.4
	Sensible Heat Factor			0.920	0.930	0.780	0.830	0.740
	Sensible Heat Factor - High Later	nt		20	20	20	20	20
	Capacity at 47°F	Rated ²	BTU/H	15,000	21,600	23,000	32,000	37.000
	Capacity Range	Min-Max	BTU/H	7,700–18,000	8,800–28,000	9,400–28,800	13,000–34,000	13,800–40,000
	Power Input at 47°F	Rated ²	W	1,130	1,880	2,140	2,400	3,280
eating	·	Rated ³	BTU/H	8,900	14,300	19,200	21,400	32,800
uung	Capacity at 17°F	Max	BTU/H	15,000	21,600	23.000	32,000	37,000
	Capacity at 5°F	Max ⁴	BTU/H	15,000	21,600	23,000	32,000	37,000
	Capacity at -5°F	Max 5	BTU/H		_	25,000	-	-
	SEER2	IVIGA	DIO/II	20.8	19.2	16.0	15.2	16.0
	EER2			12.7	12.5	9.9	12.8	9.5
ficiency	HSPF2			9.0	8.5	9.9	8.5	9.5
	COP			3.8	3.3	3.1	3.9	3.3
	1	D	CENA					
	Air Flow Rate - Cooling (Quiet-Lo-Med-High-SHigh)	Dry	CFM	278–381–448	471–573–675	515–625–735	613–744–875	767–910–910
	3 3 .	Wet	CFM		<u> </u>	_	_	_
:	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	278–381–448	471–573–675	515–625–735	613–744–875	767–910–910
	Sound Pressure Level	Cooling	dB(A)	29–36–39	33–36–41	33–36–41	32–37–41	35–40–42
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	29–36–39	33–36–41	33–36–41	32–37–41	35–40–42
door Unit	External Static Pressure		In. W.G.	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8
	Condensate Lift Mechanism	Max Distance	In. [mm]		_	_	_	_
		Н	In. [mm]	39-13/16 [1011]	39-13/16 [1011]	39-13/16 [1011]	43-3/4 [1111]	43-3/4 [1111]
	Dimensions	W	In. [mm]	17 [432]	17 [432]	17 [432]	21 [533]	21 [533]
		D	In. [mm]	21-5/8 [549]	21-5/8 [549]	21-5/8 [549]	21-5/8 [549]	21-5/8 [549]
	Weight	lbs [kg]		93 [42]	93 [42]	93 [42]	119 [54]	119 [54]
	MCA	A		14.0	17.0	17.0	24.0	26.0
	MOCP	Α		24	31	27	40	42
		Н	In. [mm]	34-5/8 [880]	34-5/8 [880]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	33-1/16 [840]	33-1/16 [840]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
utdoor Unit		D	In. [mm]	13 [330]	13 [330]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]
	Weight	lbs [kg]		129 [58.5]	131 [59.5]	190 [86]	261 [118]	261 [118]
	Air Flow Rate (Cooling/Heating)	CFM		1,691/1,691	2,020/1,930	800/800	590/680	590/680
		Cooling	dB(A)	54	55	52	52	52
	Sound Pressure Level	Heating	dB(A)	55	55	53	53	53
		Gas (O.D.)	In. [mm]	3/8 [9.52]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
oing			In. [mm]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]
9	Max. Length	ft [m]	[]	65 [20]	100 [30]	100 [30]	245 [75]	245 [75]
	Max. Height	ft [m]		40 [12]	50 [15]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor 6	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
ctrical	Recommended Breaker Size	ν, μιι, πε		15	208/230, 1, 60	200/230, 1, 60	35	35
frigorost T	necommended Breaker SIZE	А			-			
efrigerant Type				R410A	R410A	R410A	R410A	R410A
uaranteed emperature	Cooling 7	°F DB [°C DB]		14 to 115 [-18.0 to 46.0]	14 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]
peration				-13 to 75	-13 to 75	-13 to 75	-13 to 75	-13 to 75
ange	Heating	°F DB [°C DB]		[-25.0 to 24.0]	[-25.0 to 24.0]	[-25.0 to 24.0]	[-25.0 to 24.0]	[-25.0 to 24.0]

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

AHN Rated Conditions

*Cooling (Indoor // Outdoor)

*F 80 DB, 67 WB // 95 DB, 75 WB

(Rated data is determined

*Heating at 17°F (Indoor // Outdoor)

*F 70 DB, 60 WB // 17 DB, 15 WB

*Heating at 17°F (Indoor // Outdoor)

*F 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB, 60 WB // 17 DB, 15 WB

*T 70 DB,



SLZ-KF

Ceiling Cassette Indoor Unit





Four-way Ceiling Cassette

The SLZ Four-way recessed ceiling cassettes mount flush with the ceiling and fit into a 2' x 2' suspended ceiling grid. Indirect or Direct airflow settings direct supply air away from or toward room occupants. Each of the four vanes is fully customizable to provide 72 unique airflow patterns to suit the room's comfort requirements perfectly.

Capacities: 9,000 to 18,000 BTU/H

Sound: As low as 24 dB(A)

SEER2: Up to 20.80 **HSPF2:** Up to 10.70

COP: Up to 3.90

ENERGY STAR®: Most systems

→ ← Fresh Air Intake

A duct opening is provided in the main body, making it possible to bring fresh air in directly, where it can then be heated to provide clean, refreshing comfort.



3D i-see Sensor®

The SLZ Model comes equipped with a 3D i-see Sensor, an infrared-ray sensor that measures temperatures at different positions throughout the space. While scanning the area, eight vertically arranged sensor elements analyze the room temperature in three dimensions. Based on temperature readings, the sensor detects the location of people in the room.

SLZ-KF Specifications



SUZ-KA09/12/15NA2





























































SLP-18FAU (Standard grille) SLP-18FAEU (3D i-see Sensor® grille)

				Joint Lap Rare Earth Magnet DC Fan Motor	Grooved Piping		
Indoor Unit				SLZ-KF09NA	SLZ-KF12NA	SLZ-KF15NA	SLZ-KF18NA
Outdoor Unit				SUZ-KA09NA2	SUZ-KA12NA2	SUZ-KA15NA2	SUZ-KA18NA2
HRI Certified Re	eference Number			207699119	207699122	202392062	207699125
	Capacity	Rated ¹	BTU/H	9,000	12,000	14,100	17,700
	Capacity Range	Min-Max	BTU/H	3,600–9,000	3,900–12,000	5,100–14,100	6,100–17,700
. P	Power Input	Rated ¹	W	670	900	1,150	1,410
oling	Moisture Removal	Pints/h		1.0	2.8	3.2	4.7
	Sensible Heat Factor			0.870	0.740	0.750	0.710
	Sensible Heat Factor - High Lat	ent		_	_	_	_
	Capacity at 47°F	Rated ²	BTU/H	11,000	13,000	18,000	19,700
	Capacity Range	Min-Max	BTU/H	4,010–12,000	4,800–13,000	5,100–19,100	8,400-20,900
	Power Input at 47°F	Rated ²	W	4,010	4,800	5,100	8,400
ating	6 1 14705	Rated ³	BTU/H	6,900	8,900	11,900	12,900
	Capacity at 17°F	Max	BTU/H	6,900	8,900	11,900	12,900
	Capacity at 5°F	Max ⁴	BTU/H	5,600	6,100	8,900	9,800
	Capacity at -5°F	Max 5	BTU/H	_	<u> </u>	_	
	SEER2			20.2	21.7	20.7	22.9
	EER2			12.6	12.2	12.2	12.5
ciency	HSPF2			11.9	10.9	10.7	10.5
	СОР			3.9	2.9	3.0	3.1
	Air Flow Rate - Cooling	Dry	CFM	230–265–300	230–265–335	245–315–405	300–420–475
(Quiet-Lo- Air Flow F (Quiet-Lo- Sound Pre	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	207–239–270	207–252–302	221–284–365	270-378-429
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	230–265–335	230–265–335	245–315–405	300-420-475
	Sound Pressure Level	Cooling	dB(A)	25–28–31	25-30-34	27-34-39	32-40-43
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	25–28–31	25–30–34	27–34–39	32-40-43
or Unit	External Static Pressure	Pressure In. W.G.		_	_	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]	33 [850]	33 [850]	33 [850]	33 [850]
		Н	In. [mm]	9-21/32 [245]	9-21/32 [245]	9-21/32 [245]	9-21/32 [245]
	Dimensions	W	In. [mm]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]
		D	In. [mm]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]
	Weight	lbs [kg]		31 [13.9]	31 [13.9]	31 [13.9]	31 [13.9]
	MCA	A		9.0	9.0	10.0	14.0
	MOCP	Α		15	16	18	24
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]
door Unit		D	In. [mm]	11-1/4 [285]	11-1/4 [285]	11-1/4 [285]	13 [330]
	Weight	lbs [kg]	,	81 [37]	81 [37]	81 [37]	127 [58]
	Air Flow Rate (Cooling/Heating			1229/1172	1229/1172	1243/1229	1691/1691
		Cooling	dB(A)	48	54	49	54
	Sound Pressure Level	Heating	dB(A)	50	55	51	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
ng		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
,	Max. Length	ft [m]	,	65 [20]	65 [20]	65 [20]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]
	Outdoor-Indoor 6	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
trical	Recommended Breaker Size	Α		15	15	15	15
gerant Type		1.,		R410A	R410A	R410A	R410A
aranteed	,			14 to 115	14 to 115	14 to 115	14 to 115
perature	Cooling 7	°F DB [°C DB]		[-10.0 to 46.0]	[-10.0 to 46.0]	[-10.0 to 46.0]	[-10.0 to 46.0]
eration	Heating	°F DB [°C DB]		-4 to 75	-4 to 75	-4 to 75	-4 to 75
nge	ricating	1 00 [C 00]		[-20.0 to 24.0]	[-20.0 to 24.0]	[-20.0 to 24.0]	[-20.0 to 24.0]

AHRI Rated Conditions (Rated data is determined

80 DB. 67 WB // 95 DB. 75 WB

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) 4Heating at 5°F (Indoor // Outdoor)
5Heating at -5°F (Indoor // Outdoor)

70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

'Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

SLZ-KF Specifications

































SLP-18FAU (Standard grille) SLP-18FAEU (3D i-see Sensor® grille)



























	- 4	2_ /	٠.
	- 4		
ļ			
,	_	_	

Indoor Unit				SLZ-KF09NA	SLZ-KF12NA	SLZ-KF15NA	SLZ-KF18NA
Outdoor Unit				SUZ-KA09NAHZ	SUZ-KA12NAHZ	SUZ-KA15NAHZ	SUZ-KA18NAHZ
AHRI Certified Re	eference Number			204627031	204627032	204627033	204627034
	Capacity	Rated ¹	BTU/H	9,000	12,000	13,700	16,800
	Capacity Range	Min-Max	BTU/H	4,800–9,000	5,070–12,000	8,500–13,700	9,010–16,800
	Power Input	Rated ¹	w	600	940	1,095	1,340
ooling	Moisture Removal	Pints/h		1.9	3.1	3.4	4.2
	Sensible Heat Factor			0.770	0.710	0.720	0.720
	Sensible Heat Factor - High Later	nt		_	_	_	_
	Capacity at 47°F	Rated ²	BTU/H	11,000	13,800	16,400	18,800
	Capacity Range	Min-Max	BTU/H	7,400–13,200	7,800–14,500	8,300–19,000	8,300-20,000
	Power Input at 47°F	Rated ²	w	820	1,170	1,830	2,020
eating		Rated ³	BTU/H	6,300	8,300	9,700	12,100
	Capacity at 17°F	Max	BTU/H	11,000	13,800	16,400	18,800
	Capacity at 5°F	Max ⁴	BTU/H	11,000	13,800	16,400	18,800
	Capacity at -5°F	Max 5	BTU/H	_	<u> </u>	_	
	SEER2			20.5	20.8	17.5	19.2
rr	EER2			15.0	12.7	12.4	12.5
fficiency	HSPF2			9.0	9.0	7.9	8.5
	СОР			3.9	3.4	2.6	2.7
	Air Flow Rate - Cooling	Dry	CFM	230-265-300	230–265–335	245-315-405	300-420-475
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	207–239–270	207–252–302	221–284–365	270-378-429
!	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	230–265–335	230–265–335	245–315–405	300–420–475
	Sound Pressure Level	Cooling	dB(A)	25-28-31	25–30–34	27–34–39	32-40-43
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	25–28–31	25-30-34	27–34–39	32-40-43
idoor Unit	External Static Pressure		In. W.G.	_	_	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]	33 [850]	33 [850]	33 [850]	33 [850]
		Н	In. [mm]	9-21/32 [245]	9-21/32 [245]	9-21/32 [245]	9-21/32 [245]
	Dimensions	W	In. [mm]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]
		D	In. [mm]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]	22-7/16 [570]
	Weight	lbs [kg]		31 [13.9]	31 [13.9]	31 [13.9]	31 [13.9]
	MCA	Α		14.0	14.0	17.0	17.0
	MOCP	Α		24	24	31	31
		Н	In. [mm]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	38-1/16 [840]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]
utdoor Unit		D	In. [mm]	13 [330]	13 [330]	13 [330]	13 [330]
	Weight	lbs [kg]		129 [58.5]	129 [58.5]	131 [59.5]	131 [59.5]
	Air Flow Rate (Cooling/Heating)	CFM		1,691/1,691	1,691/1,691	2,020/1,930	2,020/1,930
	Carrad Decarrage Larval	Cooling	dB(A)	49	54	55	55
	Sound Pressure Level	Heating	dB(A)	51	55	55	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
ping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
	Max. Length	ft [m]		65 [20]	65 [20]	65 [20]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]
	Outdoor-Indoor ⁶	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
lectrical	Recommended Breaker Size	A		15	15	20	20
efrigerant Type				R410A	R410A	R410A	R410A
Guaranteed	Cooling 7	°F DB [°C DB]		14 to 115	14 to 115	14 to 115	14 to 115
emperature	Cooling	I. NO [.C DR]		[-18.0 to 46.0]	[-18.0 to 46.0]	[-10.0 to 46.0]	[-18.0 to 46.0]
Operation		°F DB [°C DB]		-13 to 75	-13 to 75	-13 to 75	-13 to 75

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)


¹Cooling (Indoor // Outdoor)
²Heating at 47°F (Indoor // Outdoor)
³Heating at 17°F (Indoor // Outdoor)
⁴Heating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB 70 DB, 60 WB // -5 DB, -6 WB

Conditions

Conditions 'Heating at -5" (Indoor // Outdoor) 'F 70 DB, 60 WB // -5 DB, -6 WB
Indoor units receive power from outdoor units through field-supplied interconnected wiring.


Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

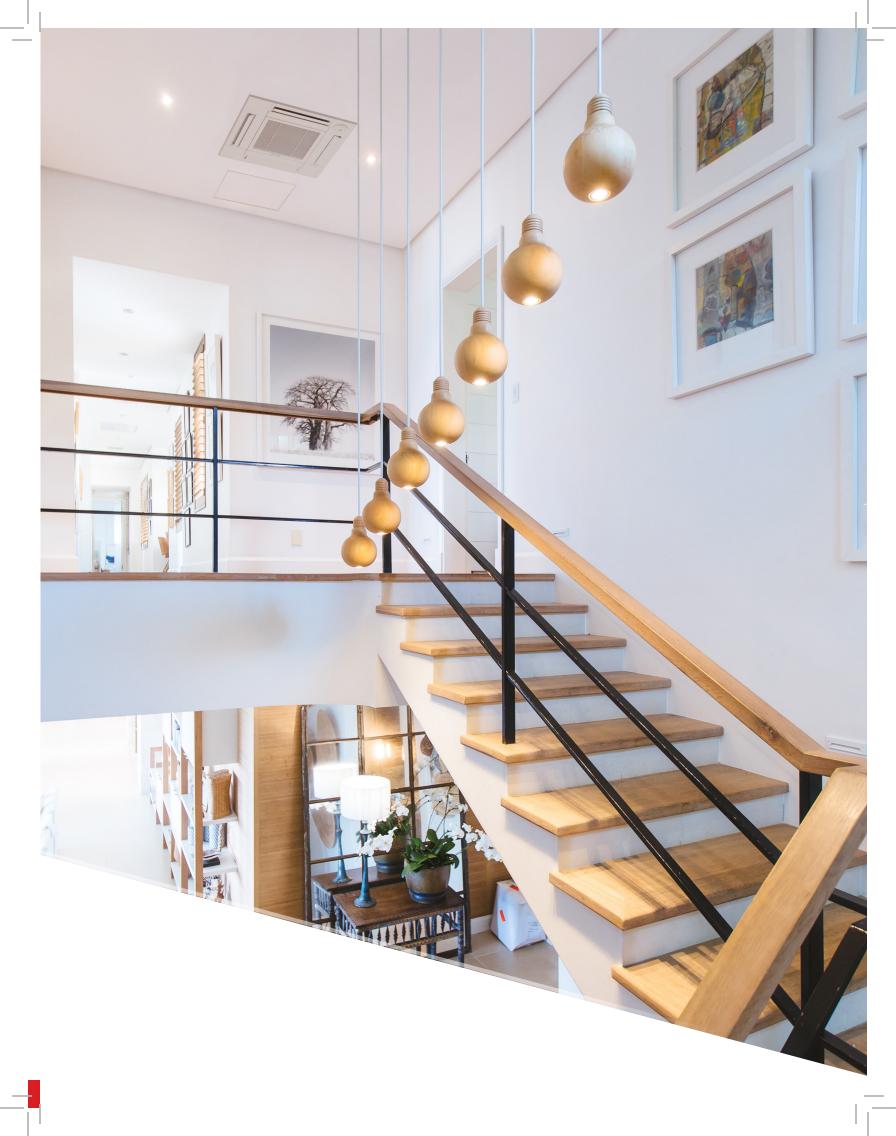

SEZ-KD

Horizontal-ducted Indoor Unit



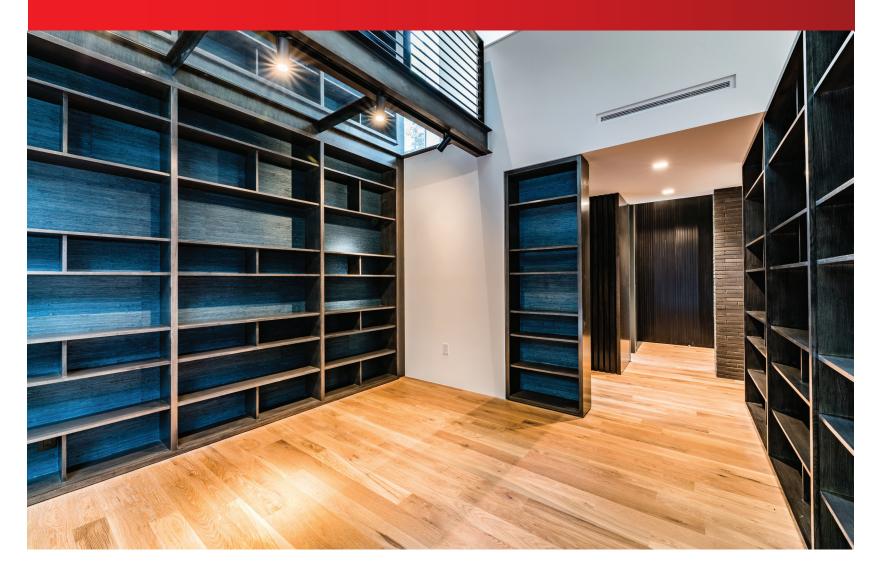

Low Static intelli-AIR™ Ducted Solutions

Available as a single-zone or multi-zone unit, these low static units are designed to cool and heat one or two rooms through a short duct run.

Capacities: 9,000 to 15,000 BTU/H

Sound: As low as 23 dB(A)

SEER2: Up to 22.00 HSPF2: Up to 13.10 COP: Up to 4.00 ENERGY STAR®: Yes

≥ ∠ Compact and Ceiling-Concealed

These low static units are designed to cool and heat one or two rooms through a short duct run. The SEZ series may be mounted in the attic, hidden in the ceiling or beneath the floor, or concealed behind a bulkhead. Only the intake-air grille and outlet vents are visible when using the SEZ Model ceiling-concealed indoor unit. The compact design requires minimal space and installs in buildings with lowered ceilings or attics.




SEZ-KD Specifications

Indoor Unit

SEZ-KD09/12/15/18NA4

Outdoor Unit







Optional Remote Controllers


















PAR-SL100A-E PAR-CT01MAU-SB MHK2



























F AUTO		(Ç\≑O)	Auto Restart	Low Temp Cooling	Optional	Group Control Optional	M-NET connection Optional	USNAP	Optional	Optional	T-STAT Optional	٥
Drain Lift Up	Flare connection	Self Diagnosis	Failure Recall	Inverter	Joint Lap	DC Rotary	Rare Earth Magnet	DC Fan Motor	PAM	Grooved Piping	Heat Caulking Fixing Method	
Indoor Uni	t						SEZ-KD09N/	A4R1		SEZ-KD1	2NA4R1	
Outdoor U	nit						SUZ-KA09N	IA2		SUZ-KA	12NA2	
ΔHRI Certifie	d Reference	Number					2076991	10		20760	0122	

Indoor Unit			SEZ-KD09NA4R1	SEZ-KD12NA4R1	SEZ-KD15NA4R1	SEZ-KD18NA4R1	
Dutdoor Unit HRI Certified Reference Number				SUZ-KA09NA2	SUZ-KA12NA2	SUZ-KA15NA2	SUZ-KA18NA2
AHRI Certified Re	eference Number			207699119	207699122	202392062	207699125
	Capacity	Rated ¹	BTU/H	9,000	12,000	15,000	18,000
	Capacity Range	Min-Max	BTU/H	3,900–9,000	4,000–12,000	5,200–15,000	6,100–18,000
	Power Input	Rated ¹	W	700	930	1,150	1.310
Cooling	Moisture Removal	Pints/h		1.5	1.9	1.9	2.8
	Sensible Heat Factor			0.820	0.820	0.860	0.820
	Sensible Heat Factor - High Later	nt		_	_	_	_
	Capacity at 47°F	Rated ²	BTU/H	12.000	15.000	18.000	21.600
	Capacity Range	Min-Max	BTU/H	4,200–12,800	4,800–16,800	5,000–21,600	8,100–25,600
	Power Input at 47°F	Rated ²	W	1,100	1,330	1,440	1,580
leating	Tower input at 47 T	Rated ³	BTU/H	7,600	10,000	11,700	13,900
icating	Capacity at 17°F	Max	BTU/H	6,700	9,000	11,900	13,100
	Capacity at 5°F	Max ⁴	BTU/H	6,000	7,900	10,000	12,000
	Capacity at -5°F	Max 5	BTU/H	-	7,900 —	10,000	12,000
	SEER2	IVIdX -	В10/П	20.2		20.7	22.9
				· · · · · · · · · · · · · · · · · · ·	21.7		
fficiency	EER2			12.6	12.2	12.2	12.5
	HSPF2			11.9	10.9	10.7	10.5
	СОР			3.1	3.3	3.6	4.0
	Air Flow Rate - Cooling	Dry	CFM	194–247–317	247–317–388	353–441–529	423–529–635
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	174–222–285	222–285–349	317–396–476	381–476–572
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	194–247–317	247–317–388	353–441–529	423–529–635
	Sound Pressure Level	Cooling	dB(A)	23–26–30	23–28–33	30–34–37	30–34–38
1 0.5	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	23–26–30	23–28–33	30–34–37	30–34–38
door Unit	External Static Pressure		In. W.G.	0.02-0.06-0.14-0.2	0.02-0.06-0.14-0.2	0.02-0.06-0.14-0.2	0.02-0.06-0.14-0.2
	Condensate Lift Mechanism	Max Distance	In. [mm]	2121/32 [550]	21-21/32 [550]	21-21/32 [550]	21-21/32 [550]
		Н	In. [mm]	7-7/8 [200]	7-7/8 [200]	7-7/8 [200]	7-7/8 [200]
	Dimensions	W	In. [mm]	31-1/8 [790]	39 [990]	39 [990]	46-7/8 [1190]
		D	In. [mm]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]
	Weight	lbs [kg]		42 [19.0]	50 [22.0]	54 [24.0]	62 [28.0]
	MCA	Α		9.0	9.0	10.0	14.0
	MOCP	Α		15	16	18	24
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]
utdoor Unit		D	In. [mm]	11-1/4 [285]	11-1/4 [285]	11-1/4 [285]	13 [330]
	Weight	lbs [kq]		81 [37]	81 [37]	81 [37]	127 [58]
	Air Flow Rate (Cooling/Heating)	- 5-		1229/1172	1229/1172	1243/1229	1691/1691
	, 3	Cooling	dB(A)	48	54	49	54
	Sound Pressure Level	Heating	dB(A)	50	55	51	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]
	Diameter	Liquid (O.D.)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
iping	Diameter	Indoor Drain		1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
iping	Max. Length	ft [m]	III. [IIIIII]	65 [20]	65 [20]	65 [20]	100 [30]
	Max. Length	π [m] ft [m]		40 [12]	40 [12]		
					• •	40 [12]	50 [15]
lectrical	Outdoor-Indoor 6	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
f: . . =	Recommended Breaker Size	А		15	15	15	15
efrigerant Type				R410A	R410A	R410A	R410A
Guaranteed	Cooling 7	°F DB [°C DB]		14 to 115 [-10.0 to 46.0]	14 to 115 [-10.0 to 46.0]	14 to 115	14 to 115 [-10.0 to 46.0]
Temperature				-4 to 75	[-10.0 to 46.0] -4 to 75	[-10.0 to 46.0] -4 to 75	[-10.0 to 46.0] -4 to 75
Operation	Heating	°F DB [°C DB]					

Notes:

Notes:

AHRI Rated Conditions

(Cooling (Indoor // Outdoor)

(Rated data is determined

AHeating at 47°F (Indoor // Outdoor)

AHeating at 17°F (Indoor // Outdoor)

AHeating at 5°F (Indoor // Ou

SEZ-KD Specifications

SEZ-KD09/12/15/18NA4

Indoor Unit

Outdoor Unit



SUZ-KD09/12/15/18NAR1

Optional Remote Controllers

















PAR-CT01MAU-SB































r	Joint Lap	DC Rotary	Pare Earth Magnet	DC Fan Motor	PAM	Grooved Piping	Heat Caulking Fixing Method	K
---	-----------	-----------	-------------------	--------------	-----	----------------	--------------------------------	---

Indoor Unit				SEZ-KD09NA4R1	SEZ-KD12NA4R1	SEZ-KD15NA4R1	SEZ-KD18NA4R1
Outdoor Unit				SUZ-KA09NAHZ	SUZ-KA12NAHZ	SUZ-KA15NAHZ	SUZ-KA18NAHZ
AHRI Certified Re	eference Number			204627031	204627032	204627033	204627034
	Capacity	Rated ¹	BTU/H	9,000	12,000	15,000	18,000
	Capacity Range	Min-Max	BTU/H	4,500–9,000	5,210–12,000	9,000–15,000	9,200–18,000
	Power Input	Rated ¹	W	690	920	1,200	1,370
Cooling	Moisture Removal	Pints/h		1.7	2.5	2.8	2.0
	Sensible Heat Factor	1		0.790	0.760	0.800	0.870
	Sensible Heat Factor - High Later	nt			_	_	_
	Capacity at 47°F	Rated ²	BTU/H	12.500	15.000	18.000	21.600
	Capacity Range	Min-Max	BTU/H	8,100–13,300	7,700–18,000	8.600–22.400	8.800–28.000
	Power Input at 47°F	Rated ²	W	1,300	1,120	1,920	1,840
Heating	·	Rated ³	BTU/H	8,700	9,000	12,200	14,200
	Capacity at 17°F	Max	BTU/H	12,500	15,000	18,000	21,600
	Capacity at 5°F	Max ⁴	BTU/H	12,500	15,000	18,000	21,600
	Capacity at -5°F	Max ⁵	BTU/H		_	_	_
	SEER2	1	1-1-11	20.5	20.8	17.5	19.2
	EER2			15.0	12.7	12.4	12.5
Efficiency	HSPF2			9.0	9.0	7.9	8.5
	COP			2.8	3.9	2.7	3.4
	Air Flow Rate - Cooling	Dry	CFM	194–247–317	247–317–388	353–441–529	423–529–635
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	174–222–285	222–285–349	317–396–476	381–476–572
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	194–247–317	247–317–388	353-441-529	423–529–635
	Sound Pressure Level	Cooling	dB(A)	23–26–30	23–28–33	30–34–37	30–34–38
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	23–26–30	23–28–33	30–34–37	30–34–38
Indoor Unit	External Static Pressure	ricuting	In. W.G.	0.02-0.06-0.14-0.2	0.02-0.06-0.14-0.2	0.02-0.06-0.14-0.2	0.02-0.06-0.14-0.2
	Condensate Lift Mechanism	Max Distance		2121/32 [550]	21-21/32 [550]	21-21/32 [550]	21-21/32 [550]
	condensate and meetidiisii	Н	In. [mm]	7-7/8 [200]	7-7/8 [200]	7-7/8 [200]	7-7/8 [200]
	Dimensions	W	In. [mm]	31-1/8 [790]	39 [990]	39 [990]	46-7/8 [1190]
		D	In. [mm]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]
	Weight	lbs [kg]		42 [19.0]	50 [22.0]	54 [24.0]	62 [28.0]
	MCA	A		14.0	14.0	17.0	17.0
	MOCP	Α		24	24	31	31
		Н	In. [mm]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	38-1/16 [840]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]
Outdoor Unit		D	In. [mm]	13 [330]	13 [330]	13 [330]	13 [330]
	Weight	lbs [kq]		129 [58.5]	129 [58.5]	131 [59.5]	131 [59.5]
		- 5-		1,691/1,691	1,691/1,691	2,020/1,930	2,020/1,930
	, 3	Cooling	dB(A)	49	54	55	55
	Sound Pressure Level	Heating	dB(A)	51	55	55	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]
Piping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
	Max. Length	ft [m]		65 [20]	65 [20]	65 [20]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]
	Outdoor-Indoor 6	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	A		15	15	20	20
Refrigerant Type				R410A	R410A	R410A	R410A
Guaranteed		0E DD 10C DD1		14 to 115	14 to 115	14 to 115	14 to 115
Temperature	Cooling ⁷	°F DB [°C DB]		[-18.0 to 46.0]	[-18.0 to 46.0]	[-10.0 to 46.0]	[-18.0 to 46.0]
Operation Range	Heating	°F DB [°C DB]		-13 to 75	-13 to 75	-13 to 75	-13 to 75
				[-25.0 to 24.0]	[-25.0 to 24.0]	[-25.0 to 24.0]	[-25.0 to 24.0]

Notes:

AHRI Rated Conditions

1 Cooling (Indoor // Outdoor)

4 Heating at 47°F (Indoor // Outdoor)

5 TO DB, 60 WB // 47 DB, 43 WB

at a fixed compressor speed)

4 Heating at 17°F (Indoor // Outdoor)

5 TO DB, 60 WB // 47 DB, 43 WB

4 Heating at 15°F (Indoor // Outdoor)

6 TO DB, 60 WB // 17 DB, 15 WB

7 TO DB, 60 WB // 5 DB, 4 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 6 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB


7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB

7 TO DB, 60 WB // 5 DB, 60 WB


7 TO DB, 60 WB // 5 DB, 60 WB


7 TO DB, 60 W

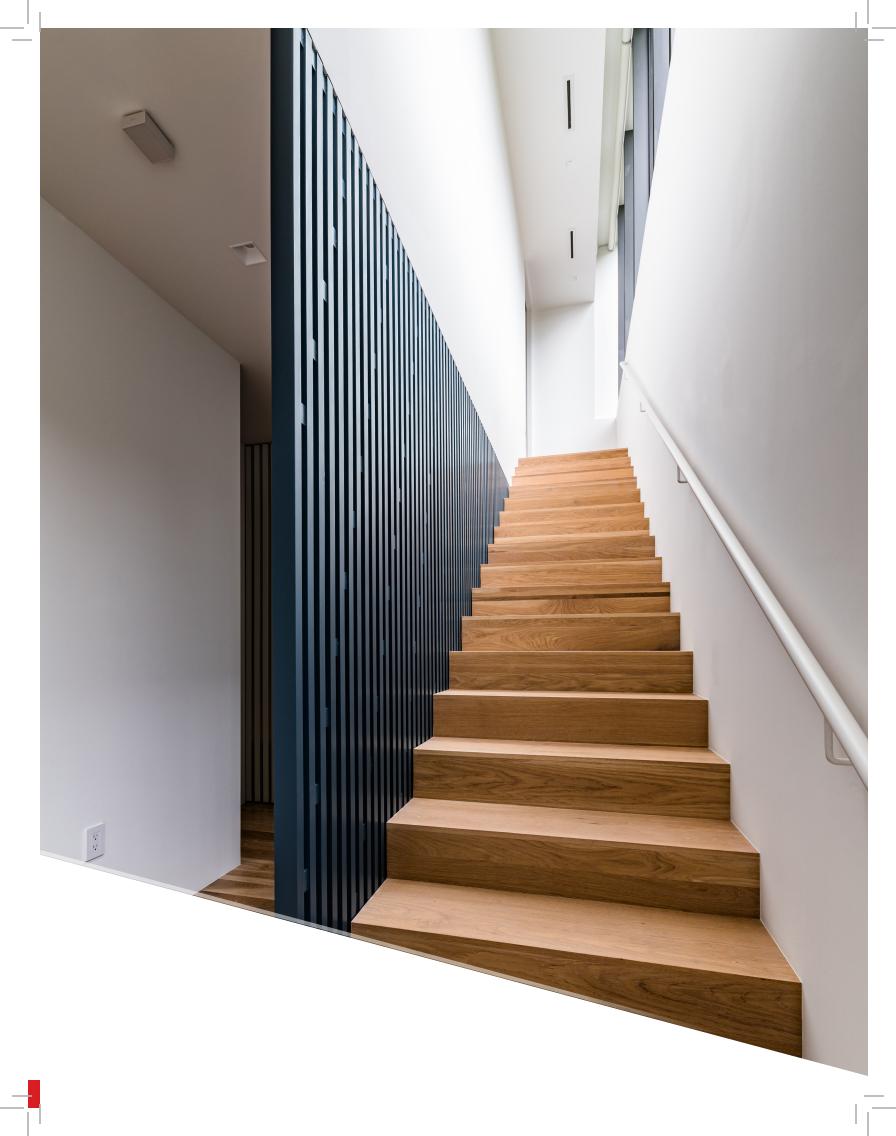

PEAD

Horizontal-ducted Indoor Unit



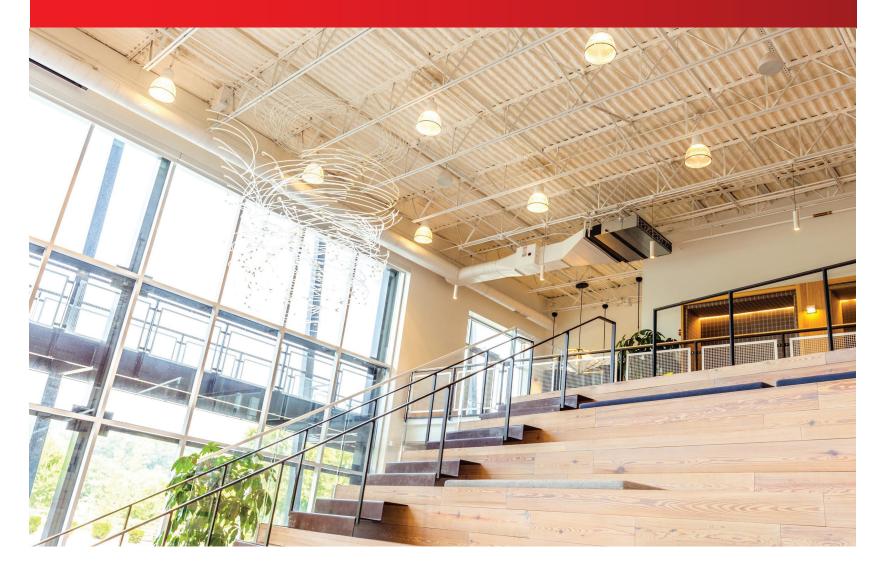

Mid Static intelli-AIR™ Ducted Solutions

The PEAD Mid Static intelli-AIR™ Ducted Solutions offer low capacities suitable for Passive Houses up to larger capacities ideal for light commercial uses such as offices, retail, and restaurants. The PEAD is capable of serving large spaces or multiple rooms supplied from a longer duct run.

Capacities: 9,000 to 15,000 BTU/H

Sound: As low as 23 dB(A)

SEER2: Up to 20.70 HSPF2: Up to 11.40 COP: Up to 4.00 ENERGY STAR®: Yes



Improved Energy Efficiency

Energy-saving efficiency has been improved, reducing electricity consumption and contributing to a further reduction in operating cost.

∠ Compact Design

The height is only 9-7/8" for all sizes of this model, ranging from 12 to 42 KBTU/H. Its compact size allows for unit installations in low ceilings with minimal clearance space.

PEAD Specifications

Indoor Unit

PEAD-A09/12/15/18/24/30/36AA8

Outdoor Unit

































Optional	
Heat Caulking	
Fixing Method	

AUTO	Y	ACO	Auto Restart	Cooling	Optional	Control	connection	Optional	Optional	Optional	Optional
Drain Lift Up	Flare connection	Self Diagnosis	Failure Recall	Inverter	Joint Lap	DC Rotary	Rare Earth Magnet	DC Fan Motor	PAM	Grooved Ploing	Heat Caulki Fixing Meth

Optional	Diagnosis	Interes	Joint Lap	DC Rotary Rare Earth Magnet	DC Fan Motor	Grooved Piping				
Indoor Unit				PEAD-A09AA8	PEAD-A12AA8	PEAD-A15AA8	PEAD-A18AA8	PEAD-A24AA8	PEAD-A30AA8	PEAD-A36AA8
Outdoor Unit				SUZ-KA09NA2	SUZ-KA12NA2	SUZ-KA15NA2	SUZ-KA18NA2	SUZ-KA24NA2	SUZ-KA30NA2	SUZ-KA36NA2
AHRI Certified Re	eference Number			207699119	207699122	202392062	207699125	202392024	202392025	202392026
	Capacity	Rated ¹	BTU/H	9,000	12,000	15,000	18,000	24,000	27,000	33,000
	Capacity Range	Min-Max	BTU/H	4,300-9,000	4,400-12,000	5,500-15,000	6,200-18,000	12,000–24,000	13,200–27,000	14,000–33,000
c "	Power Input	Rated ¹	W	720	930	1,150	1,270	1,920	2,160	3,510
Cooling	Moisture Removal	Pints/h		0.8	1.1	1.3	3.2	4.9	3.9	4.8
	Sensible Heat Factor			0.900	0.900	0.900	0.800	0.770	0.840	0.840
	Sensible Heat Factor - High Later	nt		_	_	_	_	_	_	_
	Capacity at 47°F	Rated ²	BTU/H	12,000	15,000	18,000	21,600	25,000	30,000	33,500
	Capacity Range	Min-Max	BTU/H	3,960–13,000	4,800–17,000	4,900–21,500	8,120-25,600	14,400–28,000	15,860–33,000	14,750–36,000
	Power Input at 47°F	Rated ²	W	900	1,160	1,350	1,600	1,990	2,410	3,170
Heating	·	Rated ³	BTU/H	7,600	9.900	11,300	14.000	15.000	22,400	23,000
reating	Capacity at 17°F	Max	BTU/H	8,200	11,200	13,400	16,500	16,800	24,000	24,700
	Capacity at 5°F	Max ⁴	BTU/H	6,100	7,900	10,100	12,000	-		
	Capacity at -5°F	Max 5	BTU/H	-	-	-	-	_	_	_
	SEER2	IVIUX	DIOIII	20.2	21.7	20.7	22.9	17.9	19.9	16.0
	EER2			12.6	12.2	12.2	12.5	11.6	11.3	8.5
Efficiency	HSPF2			11.9	10.9	10.7	10.5	8.3	10.6	9.5
	COP			3.9	3.7	3.9	3.9	3.6	3.6	3.0
		Dry	CFM	282–318–353	353–424–494	424–512–600	424–512–600	512–635–741	618–742–883	847–1024–1201
	Air Flow Rate - Cooling (Quiet-Lo-Med-High-SHigh)	Wet	CFM	254–286–318	318–382–445	382-461-540	382-461-540	461–572–667	556-668-795	762–922–1081
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	282–318–353	353-424-494	424–512–600	424–512–600	512–635–741	618–742–883	847–1024–1201
	Sound Pressure Level	Cooling	dB(A)	26–28–31	27–31–34	29–34–37	29–34–37	28-32-36	30–34–39	35–39–42
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	26-28-31	27–31–34	29–34–37	29–34–37	28-32-36	30-34-39	35–39–42
Indoor Unit	3 37	ricuting		0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-
indoor onit	External Static Pressure		In. W.G.	0.4–0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6	0.4-0.6
	Condensate Lift Mechanism	Max Distance	In. [mm]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]
		Н	In. [mm]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]
	Dimensions	W	In. [mm]	35-7/16 [900]	35-7/16 [900]	35-7/16 [900]	35-7/16 [900]	43-5/16 [1100]	43-5/16 [1100]	55-1/8 [1400]
		D	In. [mm]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]
	Weight	lbs [kg]		58 [26]	58 [26]	60 [27]	60 [27]	67 [30]	67 [30]	84 [38]
	MCA	A		9.0	9.0	10.0	14.0	17.0	17.0	17.0
	MOCP	Α		15	16	18	24	31	31	31
		Н	In. [mm]	21-5/8 [550]	21-5/8 [550]	21-5/8 [550]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]
	Dimensions	W	In. [mm]	31-1/2 [800]	31-1/2 [800]	31-1/2 [800]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]
Outdoor Unit		D	In. [mm]	11-1/4 [285]	11-1/4 [285]	11-1/4 [285]	13 [330]	13 [330]	13 [330]	13 [330]
outuoor orni	Weight	lbs [kg]	[]	81 [37]	81 [37]	81 [37]	127 [58]	129 [59]	129 [59]	129 [59]
	Air Flow Rate (Cooling/Heating)			1229/1172	1229/1172	1243/1229	1691/1691	2020/1930	2020/1930	2020/1930
	741 Flow Hate (cooling/fleating)	Cooling	dB(A)	48	54	49	54	55	55	55
	Sound Pressure Level	Heating	dB(A)	50	55	51	55	55	55	55
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D.)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping	Diameter	Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
ripilig	Mary Lamenth		III. [IIIIII]							
	Max. Length	ft [m]		65 [20]	65 [20]	65 [20]	100 [30]	100 [30]	100 [30]	100 [30]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor 6	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
D. 64 + T	Recommended Breaker Size	А		15	15	15	15	20	20	20
Refrigerant Type				R410A						
Guaranteed Temperature	Cooling 7	°F DB [°C DB]		14 to 115 [-10.0 to 46.0]						
Operation Range	Heating	°F DB [°C DB]		-4 to 75 [-20.0 to 24.0]	14 to 75 [-10.0 to 24.0]	14 to 75 [-10.0 to 24.0]	14 to 75 [-10.0 to 24.0]			

Notes: AHRI Rated Conditions

¹Cooling (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB

AHRI Rated Conditions

*Cooling (indoor / Outdoor)

*F 80 UB, 6 / WB // 95 UB, 75 WB

(Rated data is determined

*Heating at 47*F (Indoor // Outdoor)

*F 70 DB, 60 WB // 47 DB, 43 WB

at a fixed compressor speed)

*Heating at 17*F (Indoor // Outdoor)

*Heating at 5*F (Indoor // Outdoor)

*F 70 DB, 60 WB // 17 DB, 15 WB

70 DB, 60 WB // 5 DB, 4 WB

Conditions

*Heating at 5*F (Indoor // Outdoor)

*Heating at 5*F (Indoor // Outdoor)

*F 70 DB, 60 WB // 5 DB, 4 WB

*Heating at 5*F (Indoor // Outdoor)

*F 70 DB, 60 WB // 5 DB, 6 WB

*Hodoor units receive power from outdoor units through field-supplied interconnected wiring.

*Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

PEAD Specifications

Indoor Unit



PEAD-A09/12/15/18 /24/30/36AA8

Outdoor Unit







SUZ-KA09/12/15NAHZ SUZ-KA24NAHZ SUZ-KA30/36NAHZ

Optional Remote Controllers























































Drain Entry Connection	Outdoor Unit				SUZ-KA	09NAHZ	SUZ-KA12	2NAHZ	SUZ-KA15N	IAHZ	SUZ-KA18
Drain Lift Up Connection Congrous Recall Inverter Composition Congrous Plant Caulting Fixed Fixed Congrous Fixed Fixed Congrous Fixed Congrou	Indoor Unit				PEAD-A	109AA8	PEAD-A1	2AA8	PEAD-A15	AA8	PEAD-A18
Optional Optional Optional Optional Optional Optional Optional		Self Diagnosis Fail Rec	lure call Inverter		DC Rotary		DC Fan Motor	PAM			
				Optional	Optional	Optional	Optional	Optional	Optional	Optional	

Indoor Unit				PEAD-A09AA8	PEAD-A12AA8	PEAD-A15AA8	PEAD-A18AA8	PEAD-A24AA8	PEAD-A30AA8	PEAD-A36AA8
Outdoor Unit				SUZ-KA09NAHZ	SUZ-KA12NAHZ	SUZ-KA15NAHZ	SUZ-KA18NAHZ	SUZ-KA24NAHZ	SUZ-KA30NAHZ	SUZ-KA36NAHZ
AHRI Certified R	eference Number			204627031	204627032	204627033	204627034	206223008	206223009	206223010
7 iiiii ceranea ii	Capacity	Rated ¹	BTU/H	9,000	12,000	15,000	18,000	24.000	30,000	33,000
	Capacity Range	Min-Max	BTU/H	5,000–9,000	5,770–12,000	9,600–15,000	9,320–18,000	10,000–24,000	14,600–30,000	15,600–33,000
	Power Input	Rated ¹	W	650	850	1,190	1,400	2,080	2,350	2,490
Cooling	Moisture Removal	Pints/h		1.4	1.9	2.4	3.6	6.9	6.5	3.6
	Sensible Heat Factor	THICHT		0.820	0.820	0.820	0.780	0.680	0.760	0.880
	Sensible Heat Factor - High Later	nt		-	-	- 0.020	-		-	
	Capacity at 47°F	Rated ²	BTU/H	12.000	15.000	18.000	21,600	25.000	32.000	37.000
	Capacity Range	Min-Max	BTU/H	8,200–14,000	7,900–18,000	8,800–23,000	8,800–28,000	10,000–28,000	14,700–34,000	17,400–40,000
	Power Input at 47°F	Rated ²	W	910	1,100	1,710	1.890	1,920	2,740	2,940
Heating	Tower input at 47 T	Rated ³	BTU/H	6,800	9,000	11,700	14,200	18,000	21,000	25,400
rieating	Capacity at 17°F	Max	BTU/H	12.000	15.000	18,000	21,600	25.000	32,000	37,000
	Considerat FOF	Max ⁴	BTU/H	12,000	15,000	18,000	21,600	25,000	32,000	37,000
	Capacity at 5°F	Max 5	BTU/H	12,000	15,000	18,000	21,600	25,000	32,000	37,000
	Capacity at -5°F	IVIAX 3	B1U/H							
	SEER2			20.5	20.8	17.5	19.2	16.0	15.2	16.0
Efficiency	EER2			15.0	12.7	12.4	12.5	9.9	12.8	9.5
,	HSPF2			9.0	9.0	7.9	8.5	8.4	8.5	9.0
	СОР			3.8	3.9	3.0	3.3	3.8	3.4	3.6
	Air Flow Rate - Cooling	Dry	CFM	282–318–353	353–424–494	424–512–600	424–512–600	512–635–741	618–742–883	847–1024–1201
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	254–286–318	318–382–445	382–461–540	382–461–540	461–572–667	556–668–795	762–922–1081
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	282–318–353	353-424-494	424–512–600	424–512–600	512–635–741	618–742–883	847–1024–1201
	Sound Pressure Level	Cooling	dB(A)	26–28–31	27–31–34	29–34–37	29–34–37	28-32-36	30–34–39	35–39–42
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	26-28-31	27-31-34	29–34–37	29-34-37	28-32-36	30-34-39	35–39–42
Indoor Unit	External Static Pressure		In. W.G.	0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-	0.14-0.2-0.28-
				0.4–0.6	0.4–0.6	0.4–0.6	0.4-0.6	0.4-0.6	0.4–0.6	0.4-0.6
	Condensate Lift Mechanism	Max Distance		27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]
		Н	In. [mm]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]
	Dimensions	W	In. [mm]	35-7/16 [900]	35-7/16 [900]	35-7/16 [900]	35-7/16 [900]	43-5/16 [1100]	43-5/16 [1100]	55-1/8 [1400]
		D	In. [mm]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]
	Weight	lbs [kg]		58 [26]	58 [26]	60 [27]	60 [27]	67 [30]	67 [30]	84 [38]
	MCA	A		14.0	14.0	17.0	17.0	17.0	24.0	26.0
	MOCP	Α		24	24	31	31	27	40	42
		Н	In. [mm]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]	34-5/8 [880]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	38-1/16 [840]	33-1/16 [840]	33-1/16 [840]	33-1/16 [840]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	13 [330]	13 [330]	13 [330]	13 [330]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]
	Weight	lbs [kg]		129 [58.5]	129 [58.5]	131 [59.5]	131 [59.5]	190 [86]	261 [118]	261 [118]
	Air Flow Rate (Cooling/Heating)	CFM		1,691/1,691	1,691/1,691	2,020/1,930	2,020/1,930	800/800	590/680	590/680
		Cooling	dB(A)	49	54	55	55	52	52	52
	Sound Pressure Level	Heating	dB(A)	51	55	55	55	53	53	53
		Gas (O.D.)	In. [mm]	3/8 [9.52]	3/8 [9.52]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping	Diameter	Indoor Drain		1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
i iping	Max. Length	ft [m]	ini. [iniini]	65 [20]	65 [20]	65 [20]	100 [30]	100 [30]	245 [75]	245 [75]
	Max. Height	ft [m]		40 [12]	40 [12]	40 [12]	50 [15]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor 6	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	v, pn, nz			15	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60		
D-filmen T		A		15					35	35
Refrigerant Type				R410A	R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling 7	°F DB [°C DB]		14 to 115 [-18.0 to 46.0]	14 to 115 [-18.0 to 46.0]	14 to 115 [-10.0 to 46.0]	14 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]
Operation	Heating	°F DB [°C DB]		-13 to 75	-13 to 75	-13 to 75	-13 to 75	-13 to 75	-13 to 75	-13 to 75
							[-25.0 to 24.0]	[-25.0 to 24.0]		

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor) ⁴Heating at 5°F (Indoor // Outdoor) ⁵Heating at -5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB 70 DB, 60 WB // -5 DB, -6 WB

Indoor units receive power from outdoor units through field-supplied interconnected wiring.
Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.





P-Series Product Range

Indoor Units







Air Handler





intelli-HEAT™ **Cased Coil**

Outdoor Units

Cooling Only













PUY-A12NKA7

PUY-A18NKA7

PUY-A24NHA7

PUY-A30NHA7

PUY-A36NKA7

PUY-A42NKA7

Heat Pumps













PUZ-A12NKA7

PUZ-A18NKA7

PUZ-A24NHA7

PUZ-A30NHA7

PUZ-A36NKA7

PUZ-A42NKA7

Hyper-heating INVERTER® Heat Pumps



PUZ-HA24NHA1





PUZ-HA30NKA





PUZ-HA42NKA1

69





Outdoor Unit Features

Energy Saving Efficiency

Improved Compressor Technology

Industry-leading energy efficiency has been achieved through the optimization of a newly designed compressor and the use of the latest energy-saving technologies. All compressors offer high performance due to advanced variable-speed INVERTER-drive technology, which varies the compressor speed dynamically to adapt to the conditioning requirements of the room continuously.

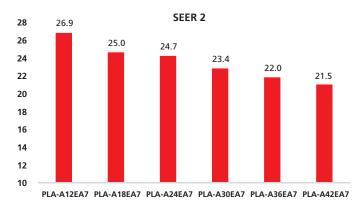

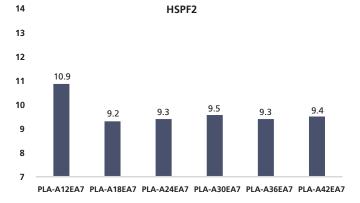


Enhanced Outdoor Unit Fan (A36-42)

A newly designed fan increases airflow capacity and reduces operation noise. The opening for the fan in the outdoor unit is 21-3/4" in diameter. Exchanging heat more efficiently contributes to increased energy savings and lower noise levels.



Highly Efficient Heat Exchanger (A36-42)

The A36-42 units use a 5/16" diameter pipe. The high-density heat exchanger contributes to efficient heat exchange and reduces the amount of refrigerant used, which benefits the environment.



Air Conditioning Features (PUY)

Reliability and Performance in Low Ambient Conditions (PUY Model)

The PUY Model cooling-only unit provides cooling all year round, even in cold climate low ambient conditions. By controlling the fan speed, the PUY can offer stable cooling operation down to -40° F.

Optional Air Protection Guide/Wind Baffle is needed when ambient temperature is under 23° F.

Low Ambient Cooling Operation Range




Continuous Operation

A control algorithm allows for stable continuous operation to meet cooling requirements all year round.

Backup Rotation Function

The two units operate alternately to maintain equal runtimes and equivalent wear, extending their life. In this configuration, if one unit experiences issues, the other unit continues to operate. Can only be used with PAR-40MAAU controller.

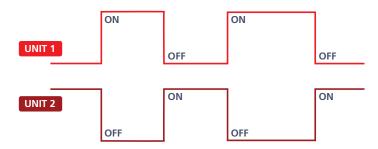

Quick Auto Restart After Power Failure

In case of power failures, auto restart time shortens from 180 seconds to 60 seconds. The unit starts back up in the same operation mode it ran when the power failure occurred.

Heat Pump Features (PUZ)


Wide Operation Range

P-Series heat pumps offer a wide temperature operation range, easily fitting many climate conditions.

1. In case that the air protection guide wind baffle is installed. (In case the wind baffle is not installed, the minimum temperature will be 23° F (-5° C) DB) 2. A24/30/36/42



Energy Efficient

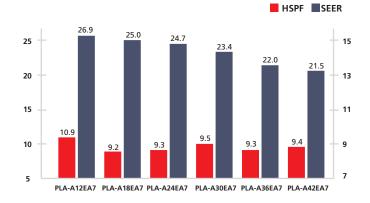

Flexible Installation

Long piping lengths enable system design flexibility for applications such as apartment buildings, churches, or strip malls.

	Pip	ing
Outdoor Unit	Length (ft.)	Height (ft.)
PUZ-A12NKA7	100	100
PUZ-A18NKA7	100	100
PUZ-A24NKA7	165	100
PUZ-A30NKA7	165	100
PUZ-A36NKA7	165	100
PUZ-A42NKA7	165	100

Hyper-Heating INVERTER® Features (PUZ-HA)


Improved Heating Performance

Our unique Flash Injection circuit achieves remarkably high heating performance. This technology has resulted in excellent heating capacity ratings in outdoor temperatures as low as 5° F. The guaranteed heating operation range of the heating mode extends to -13° F.


Improved Comfort

The Flash Injection circuit improves start-up and recovery from the defrosting operation. The defrost operation control improves the required defrost frequency. These features enable the temperature to reach the set point fast and contribute to maintaining the desired setting.


Approximately 30% Higher Than Model One Size Larger (Example of 30,000 BTU/H Model)




Guaranteed Heating Operation Range is Extended to -13° F Ambient Temperature

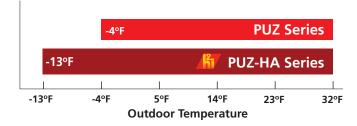

Quick Start-up

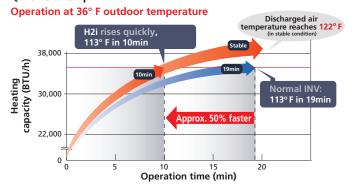


Operation at -4° F outdoor temperature





H2i Defrost Control and Faster Recovery from Defrost Operation Field Test Results: Office building in Asahikawa, Hokkaido, Japan


Operation data for 25 Jan. 2005



Operation data for 2 Dec. 2004





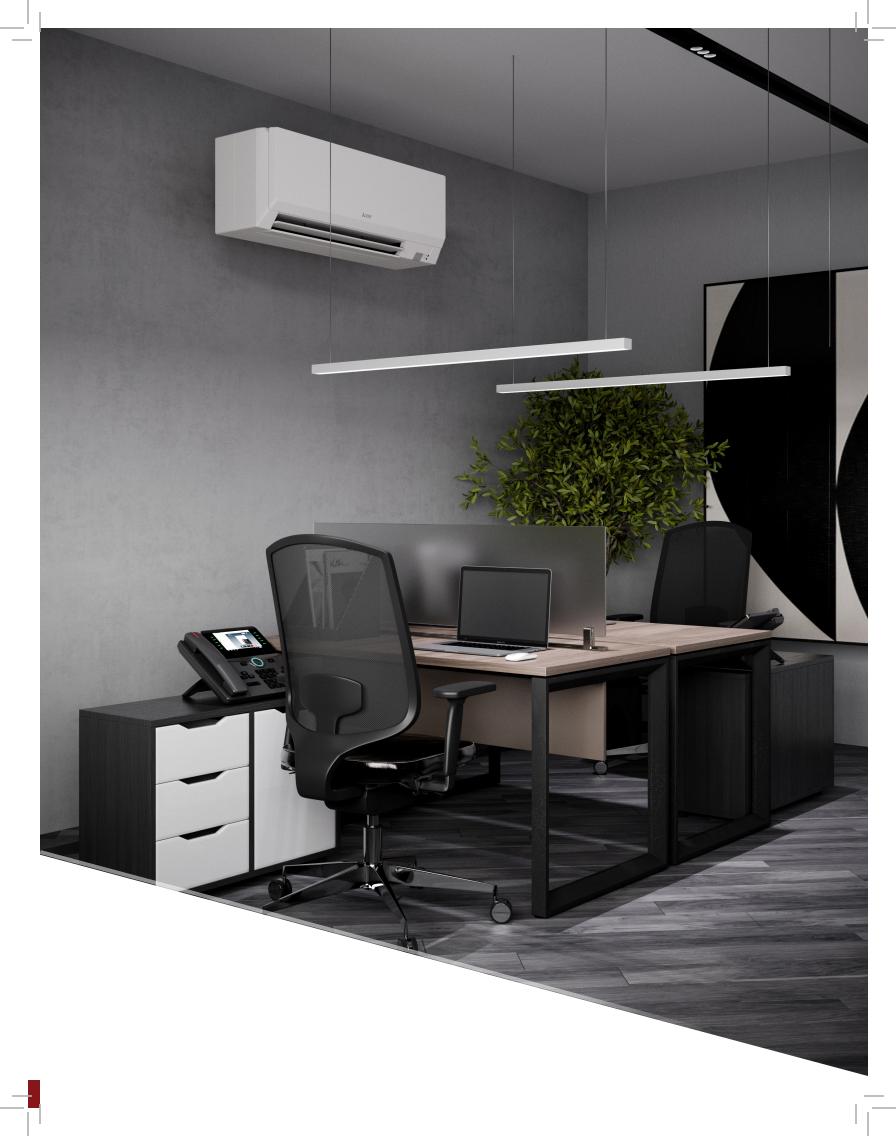

P-Series Capacity Range

Cooling Only (PUY)

	Model	12,000 BTU/H	18,000 BTU/H	24,000 BTU/H	30,000 BTU/H	36,000 BTU/H	42,000 BTU/H
Ceiling Cassette	PLA Model		•	•	•	•	•
Wall-mounted	PKA Model	•	•	•	•	•	
Multi-position Air Handler	PVA Model	•	•	•	•	•	•
Horizontal- ducted	PEAD Model	•	•	•	•	•	•
Ceiling- suspended	PCA Model			•	•	•	•
intelli-HEAT™	PAA Model			•	•	•	•

Heat Pumps (PUZ)

	Model	12,000 BTU/H	18,000 BTU/H	24,000 BTU/H	30,000 BTU/H	36,000 BTU/H	42,000 BTU/H
Ceiling Cassette	PLA Model		•	•	•	•	•
Wall-mounted	PKA Model	•	•	•	•	•	
Multi-position Air Handler	PVA Model	•	•	•	•	•	•
Horizontal- ducted	PEAD Model	•	•	•	•	•	•
Ceiling- suspended	PCA Model			•	•	•	•
intelli-HEAT™	PAA Model			•	•	•	•

Hyper-heating (PUZ-HA)

	Model	24,000 BTU/H	30,000 BTU/H	36,000 BTU/H	42,000 BTU/H
Ceiling Cassette	PLA Model	•	•	•	•
Wall-mounted	PKA Model	•	•	•	
Multi-position Air Handler	PVA Model	•	•	•	•
Horizontal- ducted	PEAD Model	•	•	•	•
Ceiling- suspended	PCA Model	•	•	•	•
intelli-HEAT™	PAA Model	•	•	•	



P-Series Features

								P-Se	eries					
	Category	Feature	Indoor unit			PLA-A12	2/18/24/30/3	36/42EA7			P PK/	KA-A12/18I A-A24/30/36	.A KA7	
			Outdoor Unit	PUZ-A	PUY-A	PUZ-HA	MXZ-3C	MXZ-4C	MXZ-5C	MXZ-SM	PUZ-A	PUY-A	PUZ-HA	
	i-see	Radiant Tem (3D i-s	perature Control ee Sensor®)	•	•	•	•	•	•	•				
	Sensor™		emperature Ionitor	•	•	•	•	•	•	•				
	Energy	ENER	RGY STAR®	12/18/ 24/36	12/18/ 24/36	30/36								
	Saving		nd Function R-33MAA)	•	•	•					•	•	•	
		Fresh	-air Intake	•	•	•	•	•	•	•				
	Air	High-eff	ficiency Filter											
	Quality	Long-life Filter		•	•	•	•	•	•	•				
		Filter Check Signal		•	•	•	•	•	•	•	Opt	Opt	Opt	
		Vertical Swing		•	•	•	•	•	•	•	•	•	•	
S		Horizo	ontal Swing											
Functions	Air Distribution	High Co	eiling Mode	•	•	•	•	•	•	•				
		Low Co	eiling Mode	•	•	•	•	•	•	•				
		Auto Fan	Speed Mode	•	•	•	•	•	•	•	•	•	•	
		Auto	o Restart	•	•	•	•	•	•	•	•	•	•	
		Low Temperature Cooling		•	•	•	•	•	•	•	•	•	•	
	Convenience	12H On/Off Operation Timer												
		24H On/Off Operation Timer												
		Weekly Timer												
		Self-I Fu	Diagnostic unction	•	•	•	•	•	•	•	•	•	•	
	Maintenance		ıre Recall ınction	•	•	•	•	•	•	•	•	•	•	
		В	lue Fin	• *2	• *2			• *1	• *1	•	• *2	•*2		

^{*1} Branch box units only: MXZ-8C48NA2, MXZ-8C60NA2, MXZ-4C36HNHZ2, MXZ-5C42HNHZ2, and MXZ-8C48HNHZ2 *2 Sea coast protection models only Opt: Separate parts must be purchased.

										P-Se	eries										
PCA	42KA7	0/36/			PEAD-A	12/18/2	24/30/30	5/42AA7	7		PVA 30	-A12/18 /36/42 <i>/</i>	8/24/ AA7				intelli-	HEAT™			
MXZ-3C	MXZ-4C	MXZ-5C	PUZ-A	PUY-A	PUZ-HA	MXZ-2C	MXZ-3C	MXZ-4C	MXZ-5C	MXZ-SM	PUZ-A	PUY-A	PUZ-HA	PUZ-A	PUY-A	PUZ-HA	MXZ-2C	MXZ-3C	MXZ-4C	MXZ-5C	MXZ-SM
_	_	_			_	_	_	_	_	~			_			_	_	_	_	_	2
Opt	Opt	Opt																			
			12	12	30/36						12	12	30/36								
•	•	•	•	•	•						•	•	•	•	•	•	•	•	•	•	•
•	•	•																			
Opt	Opt	Opt																			
•	•	•	•	•	•	•	•	•	•	•											
•	•	•	•	•	•	•	•	•	•	•											
•	•	•																			
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•*2	•*2		•* ₂	● *2				• *1	• *1	•	•*2	•* ₂		•	•						

PLA

Ceiling Cassette Indoor Unit





Four-way Ceiling Cassette

The PLA Four-way Ceiling Cassette offers an extensive lineup with capacities ranging from 12 to 42 KBTU/H. The four-way ceiling cassette provides an astonishing 72 unique airflow patterns available to accommodate different room layouts. Select any combination of 2, 3, or 4 vanes to deliver air into the area.

Capacities: 12,000 to 42,000 BTU/H

Sound: As low as 27 dB(A)

SEER2: Up to 26.90 **HSPF2**: Up to 10.90

COP: Up to 4.94

ENERGY STAR®: Most systems



3D i-see Sensor®

The PLA Model comes equipped with a 3D i-see Sensor, an infrared-ray sensor that measures temperatures at different positions throughout the space. This technology enables the user to personalize comfort by selecting their preferred airflow setting.

≈ Horizontal Airflow

The PLA includes the Draft Reduction vane setting which adjusts airflow direction more horizontal than the standard vane setting, reducing drafts dramatically. *The draft reduction can be set for only 1 vane. PAR-40MAAU is required for this setting.

PLA Model Selection

Indoor Unit

Outdoor Units

Cooling Only





PUY-A12/18NKA7

PUY-A24/30NHA7

PUY-A36/42NKA7



PLA-A12/18/24/30/36/42EA7

Required grille: PLP-41EAEU

Heat Pumps



PUZ-A12/18NKA7



PUZ-A24/30NHA7



PUZ-A36/42NKA7

Hyper-heating Heat Pumps



PUZ-HA24NH1



PUZ-HA30/36NKA



PUZ-HA42NK1

Optional Remote Controllers



PAR-41MAAU



PAC-YT53CRAU-J



PAR-CT01MAU-SB



PAC-SDW01RC-1



MHK2



PLA Specifications

























Cooling Only





















_		35-71
er ver	Eumin	Heat Caulking Fixing Method

Indoor Unit				PLA-A12EA7	PLA-A18EA7	PLA-A24EA7	PLA-A30EA7	PLA-A36EA7	PLA-A42EA7
Outdoor Unit				PUY-A12NKA7	PUY-A18NKA7	PUY-A24NHA7	PUY-A30NHA7	PUY-A36NKA7	PUY-A42NKA7
AHRI Certified Re	eference Number			206716974	206716973	209447968	209447972	209447974	209447976
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	5,800–12,000	8,000–18,000	10,000–24,000	9,000–30,000	16,000–36,000	16,000–42,000
c "	Power Input	Rated ¹	W	730	1,250	1,670	2,540	2,780	3,590
Cooling	Moisture Removal	Pints/h		1.2	2.4	3.0	5.4	4.5	7.9
	Sensible Heat Factor			0.890	0.850	0.860	0.800	0.860	0.790
	Sensible Heat Factor - High Late	nt		20	20	20	20	20	20
	Capacity at 47°F	Rated ²	BTU/H	_	_	_	_	_	_
	Capacity Range	Min-Max	BTU/H	_	_	_	_	_	_
	Power Input at 47°F	Rated ²	W	_	_	_	_	_	_
Heating	C :	Rated ³	BTU/H	_	_	_	_	_	_
	Capacity at 17°F	Max	BTU/H	_	_	_	_	_	_
	Capacity at 5°F	Max ⁴	BTU/H	_	_	_	_	_	_
	Capacity at -5°F	Max 5	BTU/H	_	_	_	_	_	_
	SEER2			21.3	20.2	16.5	14.5	15.0	14.3
	EER2			13.3	10.7	12.0	9.5	10.5	9.0
Efficiency	HSPF2			_	_	_	_	_	_
	COP			_	_	_	_	_	_
	Air Flow Rate - Cooling	Dry	CFM	420-460-490-530	460-490-570-600	530-640-710-810	570-670-780-880	670-850-1020-1200	740-920-1060-1200
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	380-420-450-490	380-420-530-560	490-600-670-770	530-630-740-840	630-810-980-1160	700-880-1020-1160
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	420-460-490-530	420-460-570-600	530-640-710-810	570-670-780-880	670-850-1020-1200	740–920–1060–1200
	Sound Pressure Level	Cooling	dB(A)	27-28-29-30	28-29-31-32	28-30-33-36	28-32-35-38	32-37-41-44	34-38-42-45
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	27-28-29-30	28-29-31-32	28-30-33-36	28-32-35-38	32-37-41-44	34-38-42-45
	External Static Pressure		In. W.G.	_	_	_	_	_	_
Indoor Unit	Condensate Lift Mechanism	Max Distance	In. [mm]	33-7/16 [849]	33-7/16 [849]	33-7/16 [849]	33-7/16 [849]	33-7/16 [849]	33-7/16 [849]
		Н	In. [mm]	10-5/32 // 1-9/16 [258 // 40]	10-5/32 // 1-9/16 [258 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]
	Dimensions	W	In. [mm]	33-1/16 // 37-13/32	33-1/16 // 37-13/32	33-1/16 // 37-13/32	33-1/16 // 37-13/32	33-1/16 // 37-13/32	33-1/16 // 37-13/32
	Difficusions	"	[]	[840 // 950]	[840 // 950]	[840 // 950]	[840 // 950]	[840 // 950]	[840 // 950]
		D	In. [mm]	33-1/16 // 37-13/32 [840 // 950]					
	Weight	lbs [kg]		46 // 11 [21 // 5]	46 // 11 [21 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]
	MCA	Α		11.0	11.0	19.0	19.0	25.0	25.0
	MOCP	Α		28	28	26	26	31	31
		Н	In. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	31-13/16 (+2-7/16) [809 (+62)]	31-13/16 (2+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	11-13/16 [300]	11-13/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		92 [41]	99 [44]	151 [68]	151 [68]	211 [96]	211 [96]
	Air Flow Rate (Cooling/Heating)			1590/—	1590/—	1940/—	1940/—	3880/—	3880/—
	Sound Pressure Level	Cooling	dB(A)	44	44	47	47	52	52
	Sound Fressure Level	Heating	dB(A)	_	_	_	_	_	_
		Gas (0.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
	Max. Length	ft [m]		165 [50]	165 [50]	225 [68]	225 [68]	225 [68]	225 [68]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	Α		15	15	25	25	30	30
Refrigerant Type				R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		-40 to 115 [-40.0 to 46.0]					
Operation	Heating	°F DB [°C DB]		_	_		_		_

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Wind baffles required to operate below 23°F DB in cooling mode. PUY with wind baffle: -40°F - 115°F. Refer to wind baffle documentation for further information.

SEACOAST PROTECTION

External Outer Panel: Phosphate coating + Acrylic-Enamel coating

- Fan Motor Support: Epoxy resin coating (at edge face)
 Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)
- "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PLA Specifications

























Heat Pump

Indoor Unit				PLA-A12EA7	PLA-A18EA7	PLA-A24EA7	PLA-A30EA7	PLA-A36EA7	PLA-A42EA7
Outdoor Unit				PUZ-A12NKA7	PUZ-A18NKA7	PUZ-A24NHA7	PUZ-A30NHA7	PUZ-A36NKA7	PUZ-A42NKA7
AHRI Certified Re	eference Number			206716978	206716983	209447978	209447982	209447984	209447986
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	5,800–12,000	8,000–18,000	10,000–24,000	9,000–30,000	16,000–36,000	16,000–42,000
	Power Input	Rated ¹	W	730	1,250	1,670	2,540	2,780	3,590
Cooling	Moisture Removal	Pints/h		1.2	2.4	3.0	5.4	4.5	7.9
	Sensible Heat Factor	T IIICS/TI		0.890	0.850	0.860	0.800	0.860	0.790
	Sensible Heat Factor - High Late	nt		20	20	20	20	20	20
	Capacity at 47°F	Rated ²	BTU/H	14,000	19,000	26,000	32,000	38,000	45,000
	Capacity Range	Min-Max	BTU/H	5,500–20,000	7,900–23,000	9,000–29,000	9,000–33,000	18,000–42,000	18,000–48,000
	Power Input at 47°F	Rated ²	W	830	1,300	1,750	2,400	2,540	3,290
Heating	Tower input at 47 1	Rated ³	BTU/H	10,100	11,000	14,900	18,100	22,000	28,000
rieating	Capacity at 17°F	Max	BTU/H	12,200	13,500	17,400	20,800	25,500	30,800
	Capacity at 5°F	Max ⁴	BTU/H	12,200	15,500	13.000	16.800	21,600	26.900
						.,	— —		.,
	Capacity at -5°F	Max 5	BTU/H	_		— 46.5		-	_
	SEER2			21.3	20.2	16.5	14.5	15.0	14.3
Efficiency	EER2			13.3	10.7	12.0	9.5	10.5	9.0
	HSPF2			10.2	9.2	9.0	9.0	8.5	8.5
	СОР	1-	T	4.94	4.28	4.35	3.9	4.38	4.0
	Air Flow Rate - Cooling	Dry	CFM	420-460-490-530	460–490–570–600	530-640-710-810	570–670–780–880	670–850–1020–1200	740–920–1060–1200
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	380-420-450-490	380-420-530-560	490–600–670–770	530-630-740-840	630–810–980–1160	700–880–1020–1160
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	420–460–490–530	420–460–570–600	530–640–710–810	570–670–780–880	670–850–1020–1200	740–920–1060–1200
	Sound Pressure Level	Cooling	dB(A)	27–28–29–30	28–29–31–32	28–30–33–36	28-32-35-38	32–37–41–44	34–38–42–45
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	27–28–29–30	28-29-31-32	28-30-33-36	28-32-35-38	32–37–41–44	34–38–42–45
	External Static Pressure		In. W.G.		_	_		_	_
Indoor Unit	Condensate Lift Mechanism	Max Distance	In. [mm]	33-7/16 [849]	33-7/16 [849]	33-7/16 [849]	33-7/16 [849]	33-7/16 [849]	33-7/16 [849]
		Н	In. [mm]	10-5/32 // 1-9/16 [258 // 40]	10-5/32 // 1-9/16 [258 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]
	Dimensions	w	In. [mm]	33-1/16 // 37-13/32 [840 // 950]					
		D	In. [mm]	33-1/16 // 37-13/32 [840 // 950]					
	Weight	lbs [kg]		46 // 11 [21 // 5]	46 // 11 [21 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]
	MCA	Α		11.0	11.0	19.0	19.0	25.0	25.0
	MOCP	Α		28	28	26	26	31	31
		Н	In. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	31-13/16 (2+7/16) [809 (+62)]	31-13/16 (2+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	11-13/16 [300]	11-13/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		93 [42]	100 [45]	153 [69]	153 [69]	214 [97]	214 [97]
	Air Flow Rate (Cooling/Heating)	CFM		1590/1590	1590/1590	1940/1940	1940/1940	3880/3880	3880/3880
		Cooling	dB(A)	44	44	47	47	52	52
	Sound Pressure Level	Heating	dB(A)	46	46	48	48	53	53
		Gas (O.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping	Dianetei	Indoor Drain		1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
riping	Max. Length	ft [m]	[]	100 [30]	100 [30]	165 [50]	165 [50]	165 [50]	165 [50]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical		-					208/230, 1, 60	208/230, 1, 60	
D. 61	Recommended Breaker Size	Α		15	15	25			30
Refrigerant Type				R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		0 to 115 [-18.0 to 46.0]					
Operation Range	Heating	°F DB [°C DB]		12 to 70 [-11.0 to 21.0]	12 to 70 [-11.0 to 21.0]	-4 to 70 [-20.0 to 21.0]			

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

80 DB, 67 WB // 95 DB, 75 WB

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor)

70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB

Conditions 4Heating at 5°F (Indoor / Outdoor) F 70 DB, 60 WB // 5 DB, 4 WB

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0° F - 115° F. Refer to wind baffle documentation for further information. *Wind parties required to operate below 23*F UB in cooling mode. PUZ with wind partie: U*F - 115*F. Refer to wind partie documental SEACOAST PROTECTION

• External Outer Panel: Phosphate coating + Acrylic-Enamel coating

• Fan Motor Support: Epoxy resin coating (at edge face)

• Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)

• "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PLA Specifications



























M Hyper-heating Heat Pump

Indoor Unit				PLA-A24EA7	PLA-A30EA7	PLA-A36EA7	PLA-A42EA7
Outdoor Unit				PUZ-HA24NHA1	PUZ-HA30NKA	PUZ-HA36NKA	PUZ-HA42NKA1
AHRI Certified R	eference Number			206223004	206223005	211259275	206223007
, and ceranean	Capacity	Rated ¹	BTU/H	24.000	30.000	36.000	42.000
	Capacity Range	Min-Max	BTU/H	10,000–24,000	14,600–30,000	14,800–36,000	18,800–42,000
	Power Input	Rated ¹	W	1,710	2,120	2,750	3,920
Cooling	Moisture Removal	Pints/h		3.0	5.4	5.5	4.5
	Sensible Heat Factor	TITIOTT		0.860	0.800	0.830	0.880
	Sensible Heat Factor - High Later	nt		20	20	20	20
	Capacity at 47°F	Rated ²	BTU/H	26,000	32,000	38,000	48.000
	Capacity Range	Min-Max	BTU/H	10,000–28,000	14,200–34,000	16,700–40,000	17,000–54,000
	Power Input at 47°F	Rated ²	W	1,700	2,260	2,650	4,210
Handina.	rower input at 47 F	Rated ³	BTU/H	17,300	20,600	24,200	40,500
Heating	Capacity at 17°F		_				· · · · · · · · · · · · · · · · · · ·
	C ': . F0F	Max	BTU/H	26,000	32,000	38,000	48,000
	Capacity at 5°F	Max ⁴	BTU/H	26,000	32,000	38,000	48,000
	Capacity at -5°F	Max ⁵	BTU/H	_	_	_	_
	SEER2			21.6	20.2	20.0	16.3
Efficiency	EER2			14.0	14.1	13.0	10.7
,	HSPF2			10.0	8.8	9.0	9.0
	СОР			4.5	4.1	4.2	3.3
	Air Flow Rate - Cooling	Dry	CFM	530–640–710–810	570–670–780–880	670–850–1020–1200	740–920–1060–1200
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	490–600–670–770	530-630-740-840	630–810–980–1160	700–880–1020–1160
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	530-640-710-810	570–670–780–880	670–850–1020–1200	740–920–1060–1200
	Sound Pressure Level	Cooling	dB(A)	28–30–33–36	28–32–35–38	32–37–41–44	34–38–42–45
to de coltoda	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	28–30–33–36	28–32–35–38	32–37–41–44	34–38–42–45
Indoor Unit	External Static Pressure		In. W.G.	_	_	<u> </u>	_
	Condensate Lift Mechanism	Max Distance	In. [mm]	33-7/16 [849]	33-7/16 [849]	33-7/16 [849]	33-7/16 [849]
		Н	In. [mm]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]	11-3/4 // 1-9/16 [298 // 40]
	Dimensions	W	In. [mm]	33-1/16 // 37-13/32 [840 // 950]	33-1/16 // 37-13/32 [840 // 950]	33-1/16 // 37-13/32 [840 // 950]	33-1/16 // 37-13/32 [840 // 950]
		D	In. [mm]	33-1/16 // 37-13/32 [840 // 950]	33-1/16 // 37-13/32 [840 // 950]	33-1/16 // 37-13/32 [840 // 950]	33-1/16 // 37-13/32 [840 // 950]
	Weight	lbs [kg]		56 // 11 [25 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]	56 // 11 [25 // 5]
	MCA	Α		17.0	24.0	24.0	36.0
	MOCP	A		27	40	40	44
		Н	In. [mm]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]
	Weight	lbs [kg]		190 [86]	261 [118]	261 [118]	283 [128]
	Air Flow Rate (Cooling/Heating)	CFM		1940/1940	3880/3880	3880/3880	3319/3319
		Cooling	dB(A)	52	52	52	49
	Sound Pressure Level	Heating	dB(A)	53	53	53	51
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping			In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
. 159	Max. Length	ft [m]	[]	165 [50]	245 [75]	245 [75]	245 [75]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	Α		25	35	35	40
Refrigerant Type		P**		R410A	R410A	R410A	R410A
Guaranteed				0 to 115	0 to 115	0 to 115	0 to 115
Temperature	Cooling ⁶	°F DB [°C DB]		[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]
Operation	Heating	°F DB [°C DB]		-13 to 70	-13 to 70	-13 to 70	-13 to 70
Range	neauito	I L DR LC DRI		[-25.0 to 21.0]	[-25.0 to 21.0]	[-25.0 to 21.0]	[-25.0 to 21.0]

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB



PKA

Wall-mounted Indoor Unit





Wall-mounted Indoor Unit

The PKA Wall-mounted indoor unit features a sleek, compact design ideal for spaces such as daycare centers, classrooms, churches, small offices, and more. Offers selectable High Sensible vs High Latent mode for the 12,000 and 18,000 capacity units.

Capacities: 12,000 to 36,000 BTU/H

Sound: As low as 34 dB(A)

SEER2: Up to 21.30 **HSPF2:** Up to 10.20

COP: Up to 4.52

ENERGY STAR®: Some systems

Sleek Design

The PKA Wall-mounted indoor unit features a sleek, compact design ideal for spaces such as daycare centers, classrooms, churches, small offices, and more. A flat panel design and pure white color pairs with any interior.



Improved Energy Efficiency

Energy-saving efficiency has been improved, reducing electricity consumption and contributing to a further reduction in operating cost. When contrasted with the previous model's performance, SEER and HSPF efficiencies improved, realizing industry-leading energy-saving features.

PKA Model Selection

















Indoor Unit

Outdoor Units

Cooling Only




PUY-A12/18NKA7

PUY-A24/30NHA7



PUY-A36/42NKA7









PUZ-A12/18NKA7



PUZ-A24/30NHA7



PUZ-A36/42NKA7

Hyper-heating Heat Pumps



PUZ-HA24NH1



PUZ-HA30/36NKA

Optional Remote Controllers



PAR-40MAAU



PAC-YT53CRAU-J



PAR-CT01MAU-SB



PAC-SDW01RC-1



MHK2



PKA Specifications







Wi-Fi I) COMPO Wiring Ruse Drain Down Connection Composition Compo



















Cooling Only

Indoor Unit				PKA-A12LA	PKA-A18LA	PKA-A24KA7	PKA-A30KA7	PKA-A36KA7
Outdoor Unit				PUY-A12NKA7	PUY-A18NKA7	PUY-A24NHA7	PUY-A30NHA7	PUY-A36NKA7
AHRI Certified Re	ference Number			206716974	206716973	209447968	209447972	209447974
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000
	Capacity Range	Min-Max	BTU/H	4,400–12,000	5,600–18,000	10,000–24,000	9,000–30,000	16,000–36,000
	Power Input	Rated ¹	W	900	1,680	1,960	3,150	3,330
Cooling	Moisture Removal	Pints/h	1	2.7	5.8	5.0	8.1	9.7
	Sensible Heat Factor			0.880	0.730	0.770	0.700	0.700
	Sensible Heat Factor - High Later	nt		0.75	0.64	20	20	20
	Capacity at 47°F	Rated ²	BTU/H	_	_	_	_	_
	Capacity Range	Min-Max	BTU/H	_	_	_	_	_
	Power Input at 47°F	Rated ²	W	_	_	_	_	_
leating	Tower input at 47 T	Rated ³	BTU/H	_	_	_	_	_
leating	Capacity at 17°F	Max	BTU/H	_				_
	Capacity at 5°F	Max ⁴	BTU/H		_	_		_
	_ · ·	Max 5	BTU/H	_	_	_	_	
	Capacity at -5°F SEER2	IVIdX	втил					
				21.3	20.2	16.5	14.5	15.0
fficiency	EER2			13.3	10.7	12.0	9.5	10.5
	HSPF2			_	_	_	_	_
	COP	I -	T	-	_	_	-	_
	Air Flow Rate - Cooling	Dry	CFM	265–310–385–455	265–310–385–455	635–705–775	635–705–775	705–810–920
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	215–255–320–375	215–255–320–375	570–635–700	570–635–700	635–730–830
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	265–290–325–385	265–310–385–455	635–705–775	635–705–775	705–810–920
	Sound Pressure Level	Cooling	dB(A)	34–39–44–48	34–39–44–48	39–42–45	39–42–45	43–46–49
1 0.8	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	34–37–40–43	34–37–40–43	39–42–45	39–42–45	43-46-49
ndoor Unit	External Static Pressure		In. W.G.	_	_	_		_
	Condensate Lift Mechanism	Max Distance In. [mn		19-11/16 [850]	19-11/16 [850]	_	_	_
		Н	In. [mm]	11-25/32 [299]	11-25/32 [299]	14-3/8 [365]	14-3/8 [365]	14-3/8 [365]
	Dimensions	W	In. [mm]	35-23/64 [898]	35-23/64 [898]	46-1/16 [1170]	46-1/16 [1170]	46-1/16 [1170]
		D	In. [mm]	9-11/32 [237]	9-11/32 [237]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]
	Weight	lbs [kg]		28 [12.7]	28 [12.7]	46 [21]	46 [21]	46 [21]
	MCA	A		11.0	11.0	19.0	19.0	25.0
	MOCP	Α		28	28	26	26	31
		Н	In. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]
	Dimensions	w	In. [mm]	31-13/16 (+2-7/16) [809 (+62)]	31-13/16 (2+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	11-13/16 [300]	11-13/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		92 [41]	99 [44]	151 [68]	151 [68]	211 [96]
	Air Flow Rate (Cooling/Heating)	CFM		1590/—	1590/—	1940/—	1940/—	3880/—
		Cooling	dB(A)	44	44	47	47	52
	Sound Pressure Level	Heating	dB(A)	_	_	_		_
		Gas (O.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping	Diameter		In. [mm]	5/8 [16]	5/8 [16]	5/8 [16]	5/8 [16]	5/8 [16]
iping	Max. Length	ft [m]	[]	165 [50]	165 [50]	225 [68]	225 [68]	225 [68]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor ⁵	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	v, pn, Hz		208/230, 1, 60		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
-fileses-t-	veroilillelinen Riegker 2126	А			15 P4104			
Refrigerant Type Guaranteed	Cooling ⁶	°F DB [°C DB]		R410A -40 to 115	R410A -40 to 115	R410A -40 to 115	R410A -40 to 115	R410A -40 to 115
Temperature	2009	. 55 [6 55]		[-40.0 to 46.0]	[-40.0 to 46.0]	[-40.0 to 46.0]	[-40.0 to 46.0]	[-40.0 to 46.0]

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB

at a tixed compressor speed)

*Indoor units receive power from outdoor units through field-supplied interconnected wiring.

*Wind baffles required to operate below 23°F DB in cooling mode. PUY with wind baffle: -40°F - 115°F. Refer to wind baffle documentation for further information.

*SEACOAST PROTECTION

*External Outer Panel: Phosphate coating + Acrylic-Enamel coating

*Fan Motor Support: Epoxy resin coating (at edge face)

*Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)

*Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PKA Specifications







COMPO Wiring Reuse Drain Lift Up Down Connection Fair Recall



















Indoor Unit				PKA-A12LA	PKA-A18LA	PKA-A24KA7	PKA-A30KA7	PKA-A36KA7
Outdoor Unit				PUZ-A12NKA7	PUZ-A18NKA7	PUZ-A24NHA7	PUZ-A30NHA7	PUZ-A36NKA7
AHRI Certified Re	eference Number			206716978	206716983	209447978	209447982	209447984
7 ii ii ii ceranea ne	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000
	Capacity Range	Min-Max	BTU/H	4,400–12,000	5,600–18,000	10,000–24,000	9.000–30.000	16,000–36,000
	Power Input	Rated ¹	W	900	1,680	1,960	3,150	3,330
Cooling	Moisture Removal	Pints/h		2.7	5.8	5.0	8.1	9.7
	Sensible Heat Factor	1		0.880	0.730	0.770	0.700	0.700
	Sensible Heat Factor - High Later	nt		0.75	0.64	20	20	20
	Capacity at 47°F	Rated ²	BTU/H	14,000	19,000	26,000	32,000	38,000
	Capacity Range	Min-Max	BTU/H	4.400–18.000	5.400-22.000	9.000-28.000	8.900–34.000	18,200–40,000
	Power Input at 47°F	Rated ²	W	1,030	1,640	1,750	2,460	2,460
Heating	·	Rated ³	BTU/H	10.600	13.600	15.700	18.300	22,400
	Capacity at 17°F	Max	BTU/H	10,600	13,600	18,300	21,000	25,900
	Capacity at 5°F	Max ⁴	BTU/H	_	-	15,200	_	
	Capacity at -5°F	Max 5	BTU/H		_	-	_	_
	SEER2	mux	D10/11	21.3	20.2	16.5	14.5	15.0
	EER2			13.3	10.7	12.0	9.5	10.5
Efficiency	HSPF2			10.2	9.2	9.0	9.0	8.5
	COP			3.9	3.4	4.35	3.81	4.52
	Air Flow Rate - Cooling	Dry	CFM	265–310–385–455	265–310–385–455	635–705–775	635–705–775	705–810–920
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	215–255–320–375	215–255–320–375	570-635-700	570-635-700	635–730–830
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	265-290-325-385	265–310–385–455	635–705–775	635–705–775	705–810–920
	Sound Pressure Level	Cooling	dB(A)	34–39–44–48	34-39-44-48	39-42-45	39–42–45	43-46-49
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	34–37–40–43	34-37-40-43	39–42–45	39–42–45	43-46-49
Indoor Unit	External Static Pressure	ricumig	In. W.G.	_			_	
	Condensate Lift Mechanism	Max Distance	-	19-11/16 [850]	19-11/16 [850]	_	_	_
	Condensate Ent Medianism	Н	In. [mm]	11-25/32 [299]	11-25/32 [299]	14-3/8 [365]	14-3/8 [365]	14-3/8 [365]
	Dimensions	W	In. [mm]	35-23/64 [898]	35-23/64 [898]	46-1/16 [1170]	46-1/16 [1170]	46-1/16 [1170]
		D	In. [mm]	9-11/32 [237]	9-11/32 [237]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]
	Weight	lbs [kg]		28 [12.7]	28 [12.7]	46 [21]	46 [21]	46 [21]
	MCA	Α		11.0	11.0	19.0	19.0	25.0
	MOCP	Α		28	28	26	26	31
	mo ci	Н	In. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]
	Dimensions	w	In. [mm]	31-13/16 (2+7/16) [809 (+62)]	31-13/16 (2+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	11-13/16 [300]	11-13/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		93 [42]	100 [45]	153 [69]	153 [69]	214 [97]
	Air Flow Rate (Cooling/Heating)	CFM		1590/1590	1590/1590	1940/1940	1940/1940	3880/3880
		Cooling	dB(A)	44	44	47	47	52
	Sound Pressure Level	Heating	dB(A)	46	46	48	48	53
		Gas (O.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	5/8 [16]	5/8 [16]	5/8 [16]	5/8 [16]	5/8 [16]
. 3	Max. Length	ft [m]		100 [30]	100 [30]	165 [50]	165 [50]	165 [50]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	A		15	15	25	25	30
Refrigerant Type		1		R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]
Operation	-			12 to 70	12 to 70	-4 to 70	-4 to 70	-4 to 70
Range	Heating	°F DB [°C DB]		[-11.0 to 21.0]	[-11.0 to 21.0]	[-20.0 to 21.0]	[-20.0 to 21.0]	[-20.0 to 21.0]

Notes:

AHRI Rated Conditions

1 Cooling (Indoor // Outdoor)

3 Heating at 47°F (Indoor // Outdoor)

4 Heating at 47°F (Indoor // Outdoor)

4 Heating at 17°F (Indoor // Outdoor)

5 Heating at 17°F (Indoor // Outdoor)

6 Heating at 5°F (Indoor // Outdoor)

7 TO DB, 60 WB // 47 DB, 43 WB

7 TO DB, 60 WB // 17 DB, 15 WB

7 TO DB, 60 WB // 17 DB, 15 WB

8 Notes and 17°F (Indoor // Outdoor)

7 TO DB, 60 WB // 17 DB, 15 WB

9 Notes and 18°F DB, 4 WB

9 Notes and 19 Notes and

PKA Specifications




























Indoor Unit				PKA-A24KA7	PKA-A30KA7	PKA-A36KA7
Outdoor Unit				PUZ-HA24NHA1	PUZ-HA30NKA	PUZ-HA36NKA
HRI Certified Re	eference Number			206223004	206223005	211259275
	Capacity	Rated ¹	BTU/H	24,000	30,000	33,600
	Capacity Range	Min-Max	BTU/H	10,000–24,000	14,600–30,000	14,700–36,000
	Power Input	Rated ¹	w	1,900	2,330	2,700
oling	Moisture Removal	Pints/h		5.0	7.5	9.3
	Sensible Heat Factor			0.770	0.720	0.690
	Sensible Heat Factor - High La	tent		_	_	_
	Capacity at 47°F	Rated ²	BTU/H	26,000	32,000	38,000
	Capacity Range	Min-Max	BTU/H	10,000–28,000	14,600–34,000	14,900–40,000
	Power Input at 47°F	Rated ²	W	1,920	2,770	3,340
eating	Torrer input at 17 1	Rated ³	BTU/H	17,200	21,300	25,400
cuting	Capacity at 17°F	Max	BTU/H	26,000	32,000	38,000
	Capacity at 5°F	Max ⁴	BTU/H	26,000	32,000	38,000
	Capacity at -5°F	Max 5	BTU/H		——————————————————————————————————————	
	SEER2	IAIQV	וויטוט	21.6	20.2	20.0
	EER2			14.0	14.1	13.0
ficiency	HSPF2			10.0	8.8	9.0
	HSPF2 COP			3.96	3.38	3.33
			CEA 4			
	Air Flow Rate - Cooling (Quiet-Lo-Med-High-SHigh)	Dry	CFM	635–705–775	635–705–775	705–810–920
		Wet	CFM	570–635–700	570–635–700	635–730–830
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	635–705–775	635–705–775	705–810–920
Sound Pressure Level		Cooling	dB(A)	39–42–45	39–42–45	43–46–49
door Unit	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	39–42–45	39–42–45	43–46–49
door Unit	External Static Pressure		In. W.G.	_		_
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	<u> </u>	_
		Н	In. [mm]	14-3/8 [365]	14-3/8 [365]	14-3/8 [365]
	Dimensions	W	In. [mm]	46-1/16 [1170]	46-1/16 [1170]	46-1/16 [1170]
		D	In. [mm]	11-5/8 [295]	11-5/8 [295]	11-5/8 [295]
	Weight	lbs [kg]		46 [21]	46 [21]	46 [21]
	MCA	A		17.0	24.0	24.0
	MOCP	A		27	40	40
		Н	In. [mm]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
utdoor Unit		D	In. [mm]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]
	Weight	lbs [kg]		190 [86]	261 [118]	261 [118]
	Air Flow Rate (Cooling/Heating	g) CFM		1940/1940	3880/3880	3880/3880
		Cooling	dB(A)	52	52	52
	Sound Pressure Level	Heating	dB(A)	53	53	53
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
ping		Indoor Drain		5/8 [16]	5/8 [16]	5/8 [16]
3	Max. Length	ft [m]	[]	165 [50]	245 [75]	245 [75]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]
	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
ectrical	Recommended Breaker Size	Α Α		25	35	35
ofrigoront To	neconfinenceu breaker 312e	А		R410A	R410A	R410A
efrigerant Type				0 to 115	0 to 115	0 to 115
iuaranteed emperature	Cooling ⁶	°F DB [°C DB]		[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]
Operation	H. da	0F DD [0C D=]		-13 to 70	-13 to 70	-13 to 70
Range	Heating	°F DB [°C DB]		[-25.0 to 21.0]	[-25.0 to 21.0]	[-25.0 to 21.0]

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

AHRI Rated Conditions


(Rated data is determined 'Pheating at 47°F (Indoor // Outdoor) °F (Rated data is determined 'Pheating at 17°F (Indoor // Outdoor) °F (Conditions 'Pheating at 5°F (Indoor // Outdoor) °F (Pheating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB

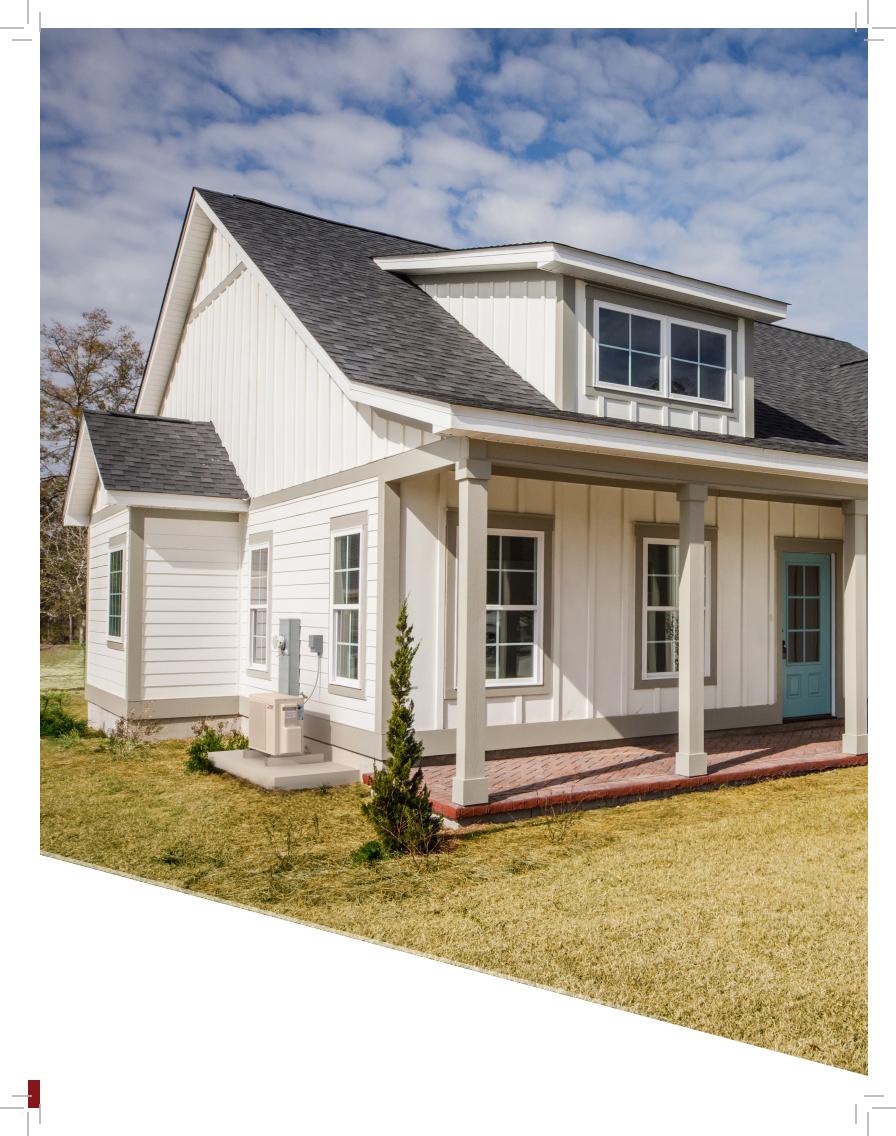

PVA

Air Handler Indoor Unit

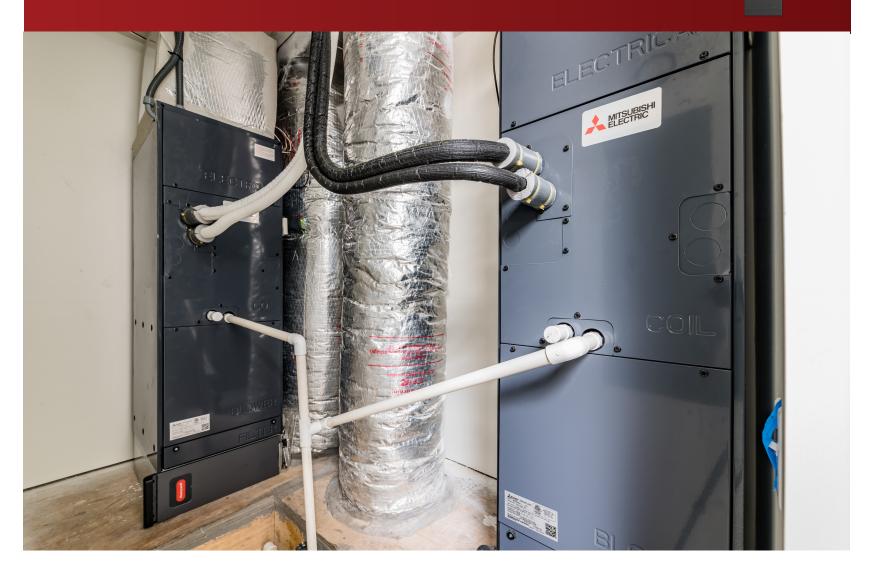

Multi-position Air Handler

The PVA Multi-position Air Handler boasts best-in-class construction with the highly efficient EC motor that features three different static pressure settings. Optional electric heat kits are available. This air handler unit features a built-in humidifier, ERV, and auxiliary heat control inputs.

Capacities: 12,000 to 42,000 BTU/H

Sound: As low as 24 dB(A)

SEER2: Up to 22.00 HSPF2: Up to 10.00

COP: Up to 4.10

ENERGY STAR®: Some systems



Versatile Positions

The PVA Model air handler, part of the intelli-AIR™ family, is multi-positional, offering up, down, left, or right airflow options, making it ideal for tight and unique spaces. (*CMA accessory recommended for downflow applications.) The PVA is an ideal solution for projects requiring a longer distance between the air handler and the outdoor unit.



Interlocking Function

The PVA Model has an output terminal which allows it to interlock with other appliances such as humidifiers and dehumidifiers.

PVA Model Selection


















Indoor Unit


Outdoor Units

Cooling Only



PUY-A12/18NKA7





PUY-A36/42NKA7



PVA-A12/18/24/30/36/42AA7

Heat Pumps



PUZ-A12/18NKA7



PUZ-A24/30NHA7



PUZ-A36/42NKA7

Hyper-heating Heat Pumps



PUZ-HA24NH1



PUZ-HA30/36NKA



PUZ-HA42NK1

Optional Remote Controllers



PAR-40MAAU



PAC-YT53CRAU-J



PAR-CT01MAU-SB



PAC-SDW01RC-1



MHK2



PVA Specifications







Wi-Fi i) Composition (Wiring Reuse Lift U) Composition (Wiring Reuse Lift



















Cooling Only

Indoor Unit				PVA-A12AA7	PVA-A18AA7	PVA-A24AA7	PVA-A30AA7	PVA-A36AA7	PVA-A42AA7
Outdoor Unit				PUY-A12NKA7	PUY-A18NKA7	PUY-A24NHA7	PUY-A30NHA7	PUY-A36NKA7	PUY-A42NKA7
AHRI Certified Re	eference Number			206716974	206716973	209447968	209447972	209447974	209447976
	Capacity	Rated ¹	BTU/H	12,000	18.000	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	4.800–12.000	7.000–18.000	10,000–24,000	10,000–30,000	14,600–36,000	15,000–42,000
	Power Input	Rated ¹	W	890	1,570	1,960	3,000	3,250	4,150
Cooling	Moisture Removal	Pints/h	1	1.2	2.4	3.0	5.4	4.5	7.9
	Sensible Heat Factor	1		0.770	0.760	0.830	0.740	0.770	0.810
	Sensible Heat Factor - High Lat	ent		20	20	20	20	20	20
	Capacity at 47°F	Rated ²	BTU/H		_	_	_	_	_
	Capacity Range	Min-Max	BTU/H	_	_	_	_	_	_
	Power Input at 47°F	Rated ²	W	_	_	_	_	_	_
Heating	'	Rated ³	BTU/H		_	_	_	_	_
ricuting	Capacity at 17°F	Max	BTU/H		_	_	_	_	_
	Capacity at 5°F	Max ⁴	BTU/H		_	_	_	_	_
	Capacity at -5°F	Max 5	BTU/H		_	_	_	_	_
	SEER2	IVIUA	DIO/II	22.0	20.3	20.5	19.4	19.8	18.7
	EER2			13.4	11.4	12.1	9.9	11.0	10.1
Efficiency	HSPF2			15.4		12.1	9.9		10.1
	COP			<u></u>	_		_	_	_
		D=-	CFM	280–340–400	515-625-735	613–744–875	613–744–875	788–956–1125	1040–1262–1485
	Air Flow Rate - Cooling (Quiet-Lo-Med-High-SHigh)	Dry Wet	CFM	280-340-400	515-625-735	613-744-875	613-744-875	788-956-1125 —	— —
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	280-340-400	515–625–735	613–744–875	613–744–875	788–956–1125	1040–1262–1485
	Sound Pressure Level	Cooling	dB(A)	27-31-35	28-33-36	30-34-38	30–34–38	30-34-38	36-40-44
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	27-31-35	28-33-36	30-34-38	30-34-38	30-34-38	36-40-44
Indoor Unit	External Static Pressure		In. W.G.	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	_	_	_	_	_
		Н	In. [mm]	50-1/4 [1275]	50-1/4 [1275]	54-1/4 [1378]	54-1/4 [1378]	59-1/2 [1511]	59-1/2 [1511]
	Dimensions	W	In. [mm]	17 [432]	17 [432]	21 [534]	21 [534]	25 [635]	25 [635]
		D	In. [mm]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]
	Weight	lbs [kg]		113 [51]	113 [51]	141 [64]	141 [64]	172 [78]	172 [78]
	MCA	Α		11.0	11.0	19.0	19.0	25.0	25.0
	MOCP	Α		28	28	26	26	31	31
		Н	In. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	w	In. [mm]	31-13/16 (+2-7/16) [809 (+62)]	31-13/16 (2+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	11-13/16 [300]	11-13/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		92 [41]	99 [44]	151 [68]	151 [68]	211 [96]	211 [96]
	Air Flow Rate (Cooling/Heating	g) CFM		1590/—	1590/—	1940/—	1940/—	3880/—	3880/—
	6 10 1 1	Cooling	dB(A)	44	44	47	47	52	52
	Sound Pressure Level	Heating	dB(A)	_	_	_	_	_	_
		Gas (O.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain		3/4 FPT [19.05]	3/4 FPT [19.05]	3/4 FPT [19.05]	3/4 FPT [19.05]	3/4 FPT [19.05]	3/4 FPT [19.05]
1 3	Max. Length	ft [m]		165 [50]	165 [50]	225 [68]	225 [68]	225 [68]	225 [68]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor ⁵	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	Α		15	15	25	25	30	30
Refrigerant Type	Dreamer Size	1		R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		-40 to 115 [-40.0 to 46.0]	-40 to 115 [-40.0 to 46.0]	-40 to 115 [-40.0 to 46.0]	-40 to 115 [-40.0 to 46.0]	-40 to 115 [-40.0 to 46.0]	-40 to 115 [-40.0 to 46.0]
Operation	Heating	°F DB [°C DB]		[-40.0 to 40.0]	[-40.0 to 40.0]	[*40.0 to 40.0]	[340.0 (0 40.0]	[*40.0 (0 40.0]	[-40.0 (0 40.0]

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)

°F 80 DB, 67 WB // 95 DB, 75 WB

Indoor units receive power from outdoor units through field-supplied interconnected wiring.
Wind baffles required to operate below 23°F DB in cooling mode. PUY with wind baffle: -40°F - 115°F. Refer to wind baffle documentation for further information.
SEACOAST PROTECTION

SEACOAST PROTECTION

• External Outer Panel: Phosphate coating + Acrylic-Enamel coating

• Fan Motor Support: Epoxy resin coating (at edge face)

• Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)

• "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PVA Specifications







COMPO Wiring Reuse Unitude Pump Down Connection Fair Recall

















Heat Pump

Indoor Unit				PVA-A12AA7	PVA-A18AA7	PVA-A24AA7	PVA-A30AA7	PVA-A36AA7	PVA-A42AA7
Outdoor Unit				PUZ-A12NKA7	PUZ-A18NKA7	PUZ-A24NHA7	PUZ-A30NHA7	PUZ-A36NKA7	PUZ-A42NKA7
AHRI Certified Re	eference Number			206716978	206716983	209447978	209447982	209447984	209447986
	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	4,800–12,000	7,000–18,000	10,000–24,000	10,000–30,000	14,600–36,000	15,000–42,000
	Power Input	Rated ¹	w	890	1,570	1,960	3,000	3,250	4,150
Cooling	Moisture Removal	Pints/h		1.2	2.4	3.0	5.4	4.5	7.9
	Sensible Heat Factor			0.770	0.760	0.830	0.740	0.770	0.810
	Sensible Heat Factor - High Later	nt		20	20	20	20	20	20
	Capacity at 47°F	Rated ²	BTU/H	14,000	19,000	26,000	32,000	38,000	46,000
	Capacity Range	Min-Max	BTU/H	5.700–19.000	7.700–23.000	12,000–28,000	12,000–34,000	17.700–42.000	18.100–48.000
	Power Input at 47°F	Rated ²	W	1,070	1,470	1,920	2,640	3,030	3,900
Heating	Tower input at 47 T	Rated ³	BTU/H	9,900	12,000	15,000	18,000	24,000	28,400
rieating	Capacity at 17°F	Max	BTU/H	12,000	14,700	17,500	20,700	27,800	31,400
	Compaits at E0E	Max ⁴	BTU/H	- 12,000 	14,700	14,500	17,200	•	26.800
	Capacity at 5°F							23,900	26,800
	Capacity at -5°F	Max ⁵	BTU/H	_	_	_	_	_	
	SEER2			22.00	20.30	20.5	19.40	19.80	18.70
Efficiency	EER2			13.40	11.40	12.10	9.90	11.00	10.10
,	HSPF2			8.90	9.00	8.30	8.90	8.70	8.80
	COP			3.82	3.78	3.96	3.54	3.66	3.44
	Air Flow Rate - Cooling	Dry	CFM	280–340–400	515–625–735	613–744–875	613–744–875	788–956–1125	1040–1262–1485
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	_	_	_	_	_	_
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	280-340-400	515–625–735	613–744–875	613–744–875	788–956–1125	1040–1262–1485
	Sound Pressure Level	Cooling	dB(A)	27-31-35	28-33-36	30-34-38	30-34-38	30-34-38	36-40-44
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	27-31-35	28-33-36	30-34-38	30-34-38	30-34-38	36-40-44
Indoor Unit	External Static Pressure		In. W.G.	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	_	_	_	_	_
		Н	In. [mm]	50-1/4 [1275]	50-1/4 [1275]	54-1/4 [1378]	54-1/4 [1378]	59-1/2 [1511]	59-1/2 [1511]
	Dimensions	W	In. [mm]	17 [432]	17 [432]	21 [534]	21 [534]	25 [635]	25 [635]
		D	In. [mm]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]
	Weight	lbs [kq]		113 [51]	113 [51]	141 [64]	141 [64]	172 [78]	172 [78]
	MCA	A		11.0	11.0	19.0	19.0	25.0	25.0
	MOCP	Α		28	28	26	26	31	31
	moci	Н	In. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	31-13/16 (2+7/16) [809 (+62)]	31-13/16 (2+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit	S.III.CI.S.OI.S	D	In. [mm]	11-13/16 [300]	11-13/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		93 [42]	100 [45]	153 [69]	153 [69]	214 [97]	214 [97]
	Air Flow Rate (Cooling/Heating)	- 0		1590/1590	1590/1590	1940/1940	1940/1940	3880/3880	3880/3880
	, , ,	Cooling	dB(A)	44	44	47	47	52	52
	Sound Pressure Level	Heating	dB(A)	46	46	48	48	53	53
		-			-	-			
	D:	Gas (0.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
n: :	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	3/4 FPT [19.05]	3/4 FPT [19.05]	3/4 FPT [19.05]	3/4 FPT [19.05]	3/4 FPT [19.05]	3/4 FPT [19.05]
	Max. Length	ft [m]		100 [30]	100 [30]	165 [50]	165 [50]	165 [50]	165 [50]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
Electrical	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	Α		15	15	25	25	30	30
Refrigerant Type				R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]
Operation Range	Heating	°F DB [°C DB]		12 to 70 [-11.0 to 21.0]	12 to 70 [-11.0 to 21.0]	-4 to 70 [-20.0 to 21.0]	-4 to 70 [-20.0 to 21.0]	-4 to 70 [-20.0 to 21.0]	-4 to 70 [-20.0 to 21.0]

Notes:

AHRI Rated Conditions

1 Cooling (Indoor // Outdoor)

AHRI Rated Conditions

1 Heating at 47°F (Indoor // Outdoor)

3 Heating at 47°F (Indoor // Outdoor)

4 Heating at 57°F (Indoor // Outdoor)

5 Heating at 17°F (Indoor // Outdoor)

6 TO DB, 60 WB // 47 DB, 43 WB

7 O DB, 60 WB // 17 DB, 15 WB

7 O DB, 60 WB // 17 DB, 15 WB

7 O DB, 60 WB // 5 DB, 4 WB

1 NODE OUTDOOR OUT

- Fan Motor Support: Epoxy resin coating (at edge face)

 Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)

 "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PVA Specifications

























Wi-Fi I) COMPO (Wiring Russe Util Up Down connection Face Recall Down Face Recall Down Connection Face Recall Down Connection Face Recall Down Connection Face Recall Down Connection Face Recall Down **#** Hyper-heating Heat Pump

Indoor Unit				PVA-A24AA7	PVA-A30AA7	PVA-A36AA7	PVA-A42AA7
Outdoor Unit				PUZ-HA24NHA1	PUZ-HA30NKA	PUZ-HA36NKA	PUZ-HA42NKA1
HRI Certified Re	eference Number			206223004	206223005	211259275	206223007
	Capacity	Rated ¹	BTU/H	24,000	30,000	33,000	42,000
	Capacity Range	Min-Max	BTU/H	10,000–24,000	14,800–30,000	15,500–36,000	17,000–42,000
	Power Input	Rated ¹	W	2.100	2,300	2.500	3,960
ooling	Moisture Removal	Pints/h		3.7	5.9	3.8	5.3
	Sensible Heat Factor	1		0.830	0.780	0.870	0.860
	Sensible Heat Factor - High Lat	tent		_	——————————————————————————————————————	_	_
	Capacity at 47°F	Rated ²	BTU/H	26,000	32,000	38,000	48,000
	Capacity Range	Min-Max	BTU/H	10,000–28,000	14,800–34,000	18,600–40,000	23,900–54,000
	Power Input at 47°F	Rated ²	W	1,980	2,460	2,850	3,850
eating	Tower input at 47 T	Rated ³	BTU/H	17,500	21,000	24,600	38,500
leating	Capacity at 17°F	Max	BTU/H	26,000	32,000	38,000	48,000
	Capacity at 5°F	Max ⁴	BTU/H	26,000	32,000	38,000	48,000
		Max 5	BTU/H	20,000	32,000	36,000	46,000
	Capacity at -5°F SEER2	IVIdX	вто/п	19.00			15.40
					18.00	18.20	
fficiency	EER2			11.40	13.00	13.20	9.80
-	HSPF2			9.40	8.70	10.00	9.30
	COP		CELL	3.8	3.8	3.9	3.7
	Air Flow Rate - Cooling	Dry	CFM	613–744–875	613–744–875	788–956–1125	1040–1262–1485
	(Quiet-Lo-Med-High-SHigh) Air Flow Rate - Heating	Wet	CFM	-	_	_	_
	(Quiet-Lo-Med-High-SHigh)	Dry	CFM	613–744–875	613–744–875	788–956–1125	1040–1262–1485
	Sound Pressure Level	Cooling	dB(A)	30–34–38	30–34–38	30–34–38	36-40-44
ndoor Unit	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	30–34–38	30–34–38	30–34–38	36-40-44
idoor onit	External Static Pressure		In. W.G.	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8	0.30-0.5-0.8
	Condensate Lift Mechanism	Max Distance	In. [mm]	_	<u> </u>	_	_
	Dimensions	Н	In. [mm]	54-1/4 [1378]	54-1/4 [1378]	59-1/2 [1511]	59-1/2 [1511]
		W	In. [mm]	21 [534]	21 [534]	25 [635]	25 [635]
		D	In. [mm]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]	21-5/8 [548]
	Weight	lbs [kg]		141 [64]	141 [64]	172 [78]	172 [78]
	MCA	A		17.0	24.0	24.0	36.0
	MOCP	A		27	40	40	44
		Н	In. [mm]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]	41-5/16 [1050]
outdoor Unit		D	In. [mm]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]
	Weight	lbs [kg]		190 [86]	261 [118]	261 [118]	283 [128]
	Air Flow Rate (Cooling/Heating	g) CFM		1940/1940	3880/3880	3880/3880	3319/3319
		Cooling	dB(A)	52	52	52	49
	Sound Pressure Level	Heating	dB(A)	53	53	53	51
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
iping			In. [mm]	3/4 FPT [19.05]	3/4 FPT [19.05]	3/4 FPT [19.05]	3/4 FPT [19.05]
·r···3	Max. Length	ft [m]	Įmini	165 [50]	245 [75]	245 [75]	245 [75]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
lectrical	Recommended Breaker Size	Α		206/230, 1, 60	35	35	40
efrigerant Type	neconlinenued Breaker SIZE	А		25 R410A	R410A	R410A	40 R410A
Guaranteed				0 to 115	0 to 115	0 to 115	0 to 115
Juaranteed Temperature	Cooling ⁶	°F DB [°C DB]		[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]
Operation	Heating	°F DB [°C DB]		-13 to 70	-13 to 70	-13 to 70	-13 to 70
Range	Heating	-L DR [,C DR]		[-25.0 to 21.0]	[-25.0 to 21.0]	[-25.0 to 21.0]	[-25.0 to 21.0]

AHRI Rated Conditions

(Rated data is determined 'Pheating at 47°F (Indoor // Outdoor) °F (Rated data is determined 'Pheating at 17°F (Indoor // Outdoor) °F (Conditions 'Pheating at 5°F (Indoor // Outdoor) °F (Pheating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB


94



PEAD

Horizontal-ducted Indoor Unit



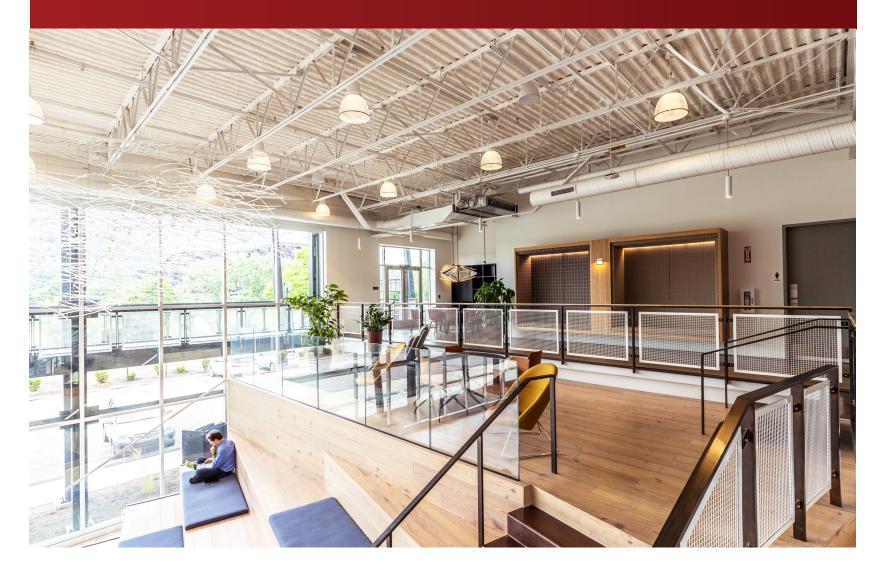

Mid Static intelli-AIR™ **Ducted Solutions**

The PEAD Mid Static intelli-AIR™ Ducted Solutions offer low capacities suitable for Passive Houses up to larger capacities ideal for light commercial uses such as offices, retail, and restaurants. The PEAD is capable of serving large spaces or multiple rooms supplied from a longer duct run.

Capacities: 9,000 to 42,000 BTU/H

Sound: As low as 24 dB(A)

SEER2: Up to 20.70 HSPF2: Up to 11.40 **COP:** Up to 4.62

ENERGY STAR®: Most systems

Slim Design

The height is only 9-7/8" for all sizes of this model, ranging from 12 to 42 KBTU/H. Its compact size allows for unit installations in low ceilings with minimal clearance space.



Improved Energy Efficiency

Energy-saving efficiency has been improved, reducing electricity consumption and contributing to a further reduction in operating cost.

PEAD Model Selection



















Indoor Unit

Outdoor Units

Cooling Only



PUY-A12/18NKA7

PUY-A24/30NHA7



PUY-A36/42NKA7

Heat Pumps



PEAD-A12/18/24/30/36/42AA7



PUZ-A12/18NKA7



PUZ-A24/30NHA7



PUZ-A36/42NKA7

Hyper-heating Heat Pumps



PUZ-HA24NH1



PUZ-HA30/36NKA



PUZ-HA42NK1

Optional Remote Controllers



PAR-40MAAU



PAC-YT53CRAU-J



PAR-CT01MAU-SB



PAC-SDW01RC-1



MHK2



PEAD Specifications Command Order Control Order









Wi-Fi i) Interface COMPO Wiring Reuse Drain Down Connection Company Flam Down Connection Company Flam Down Connection Company Company















Cooling Only

Indoor Unit				PEAD-A12AA8	PEAD-A18AA8	PEAD-A24AA8	PEAD-A30AA8	PEAD-A36AA8	PEAD-A42AA7
Outdoor Unit				PUY-A12NKA7	PUY-A18NKA7	PUY-A24NHA7	PUY-A30NHA7	PUY-A36NKA7	PUY-A42NKA7
	Reference Number			206716974	206716973	209447968	209447972	209447974	209447976
Ainti Certified	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	5,000–12,000	8,000–18,000	10,000–24,000	9,000–30,000	16,000–36,000	16,000–42,000
	Power Input	Rated 1	W	920	1,660	2,050	3,000	3,000	3,920
Cooling	Moisture Removal	Pints/h		1.8	3.7	6.9	8.6	8.1	9.0
	Sensible Heat Factor	11110/11		0.830	0.770	0.680	0.680	0.750	0.760
	Sensible Heat Factor - Hid	nh Latent		— U.USU	-	-	_	-	- 0.700
	Capacity at 47°F	Rated ²	BTU/H	_	_	_	_	_	_
	Capacity Range	Min-Max	BTU/H	_	_	_	_	_	_
	Power Input at 47°F	Rated ²	W	_	_	_	_	_	_
leating	rower input ut 47 1	Rated ³	BTU/H	_	_	_	_	_	_
leating	Capacity at 17°F	Max	BTU/H	_	_	_	_	_	_
	Capacity at 5°F	Max ⁴	BTU/H	_	_	_	_	_	_
	Capacity at -5°F	Max 5	BTU/H	_	_	_	_	_	_
	SEER2	IVIGA	BTO/II	21.3	20.2	16.5	14.5	15.0	14.3
	EER2			13.3	10.7	12.0	9.5	10.5	9.0
fficiency	HSPF2			-	-	—		-	
cicricy	COP				_	_	_		_
	ENERGY STAR® Certified			Yes	No	No	No	No	No
	Air Flow Rate - Cooling	Dry	CFM	353-424-494	424–512–600	512–635–741	618–742–883	847–1024–1201	1042–1254–148
	(Quiet-Lo-Med-High-	-							
	SHigh)	Wet	CFM	318–382–445	382–461–540	461–572–667	556–668–795	762–922–1081	1002–1214–144
	Air Flow Rate - Heating (Quiet-Lo-Med-High- SHigh)	Dry	CFM	353–424–494	424–512–600	512–635–741	618–742–883	847–1024–1201	1042–1254–148
	Sound Pressure Level	Cooling	dB(A)	27–31–34	29–34–37	28-32-36	30–34–39	35–39–42	36-40-44
	(Quiet-Lo-Med-High-								
	SHigh) Heating		dB(A)	27–31–34	29–34–37	28–32–36	30–34–39	35–39–42	36–40–44
ndoor Unit	External Static Pressure Condensate Lift Mech-	Max	In. W.G.	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6
	anism	Distance	In. [mm]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]
	Dimensions	Н	In. [mm] In.	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]
		W	[mm] In.	35-7/16 [900]	35-7/16 [900]	43-5/16 [1100]	43-5/16 [1100]	55-1/8 [1400]	55-1/8 [1400]
		D	[mm]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]
	Weight	lbs [kg]		58 [26]	60 [27]	67 [30]	67 [30]	84 [38]	91 [41]
	MCA	Α		11.0	11.0	19.0	19.0	25.0	25.0
	MOCP	Α		28	28	26	26	31	31
		Н	ln. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	ln. [mm]	31-13/16 (+2-7/16) [809 (+62)]	31-13/16 (2+7/16) [809 (+62)]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	ln. [mm]	11-13/16 [300]	11-13/16 [300]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [33 (+30)]
	Weight	lbs [kg]		92 [41]	99 [44]	151 [68]	151 [68]	211 [96]	211 [96]
	Air Flow Rate (Cooling/ Heating)	CFM		1590/—	1590/—	1940/—	1940/—	3880/—	3880/—
	ricauriy)	Cooling	dB(A)	44	44	47	47	52	52
	Sound Pressure Level	Heating	dB(A)	_	_	— 4/ —	— —		
		Gas (O.D.)	In. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
iping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
	Max. Length	ft [m]		165 [50]	165 [50]	225 [68]	225 [68]	225 [68]	225 [68]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor ⁵	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
lectrical	Recommended Breaker	А		15	15	25	25	30	30
efrigerant Tu	Size			R410A	R410A	R410A	R410A	R410A	R410A
Refrigerant Ty Guaranteed Femperature	Cooling ⁶	°F DB [°C D	B]	-40 to 115 [-40.0 to 46.0]	-40 to 115 [-40.0 to 46.0]	-40 to 115 [-40.0 to 46.0]	-40 to 115 [-40.0 to 46.0]	-40 to 115 [-40.0 to 46.0]	-40 to 115 [-40.0 to 46.0]
				[.0.0 10 40.0]	[.0.0 to 40.0]	[.0.0 to 40.0]	[.0.0 to 40.0]	[.0.0 10 40.0]	[.5.5 to 45.0]

¹Cooling (Indoor // Outdoor)

°F 80 DB, 67 WB // 95 DB, 75 WB

AHRI Rated Conditions 'Cooling (Indoor // Outdoor) °F 80 DB, 67 WB // 95 DB, 75 WB (Rated data is determined at a fixed compressor speed)

*Indoor units receive power from outdoor units through field-supplied interconnected wiring.

*Wind baffles required to operate below 23°F DB in cooling mode. PUY with wind baffle: -40°F - 115°F. Refer to wind baffle documentation for further information.

SEACOAST PROTECTION

* External Outer Panel: Phosphate coating + Acrylic-Enamel coating

* Fam Motro Support: Epoxy resin coating (at edge face)

* Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)

* "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PEAD Specifications







COMPO Wiring Reuse Drain Lift Up Down Down Connection Fair Recall



















Heat Pump

Indoor Unit				PEAD-A12AA8	PEAD-A18AA8	PEAD-A24AA8	PEAD-A30AA8	PEAD-A36AA8	PEAD-A42AA7
Outdoor Unit				PUZ-A12NKA7	PUZ-A18NKA7	PUZ-A24NHA7	PUZ-A30NHA7	PUZ-A36NKA7	PUZ-A42NKA7
	Reference Number			211546903	211546902	209447978	209447982	209447984	209447986
Arini Certineo	Capacity	Rated ¹	BTU/H	12,000	18,000	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	5,000–12,000	8,000–18,000	10,000–24,000	9,000–30,000	16,000–36,000	16,000–42,000
	Power Input	Rated ¹	W	920	1,660	2,050	3,000	3,000	3,920
Cooling	Moisture Removal	Pints/h		1.8	3.7	6.9	8.6	8.1	9.0
	Sensible Heat Factor	11110311		0.830	0.770	0.680	0.680	0.750	0.760
	Sensible Heat Factor - Hig	ah Latent		_	_	_	_	_	_
	Capacity at 47°F	Rated ²	BTU/H	14,000	19,000	26,000	32,000	38,000	45,000
	Capacity Range	Min-Max	BTU/H	5,800–18,000	7,800–22,000	9,000–28,000	8,800–34,000	18,200–40,000	18,100–48,000
	Power Input at 47°F	Rated ²	W	1,030	1,400	1,750	2,490	2,410	3,290
Heating		Rated ³	BTU/H	8,700	11,000	14,800	18,500	20,400	30,600
	Capacity at 17°F	Max	BTU/H	10,500	12,700	15,900	19,600	22,000	33,700
	Capacity at 5°F	Max ⁴	BTU/H	_	_	14,300	17,700	19,800	29,400
	Capacity at -5°F	Max 5	BTU/H	_	_	_	_	_	_
	SEER2			21.3	20.2	16.5	14.5	15.0	14.3
	EER2			13.3	10.7	12.0	9.5	10.5	9.0
Efficiency	HSPF2			10.2	9.2	9.0	9.0	8.5	8.5
	COP			3.9	3.9	4.3	3.7	4.6	4.0
	ENERGY STAR® Certified			Yes	No	No	No	No	No
	Air Flow Rate - Cooling	Dry	CFM	353-424-494	424–512–600	512-635-741	618–742–883	847–1024–1201	1042-1254-1483
	(Quiet-Lo-Med-High- SHigh)	Wet	CFM	318–382–445	382–461–540	461–572–667	556–668–795	762–922–1081	1002–1214–1443
	Air Flow Rate - Heating (Quiet-Lo-Med-High- SHigh)	Dry	CFM	353-424-494	424–512–600	512–635–741	618–742–883	847–1024–1201	1042–1254–1483
	Sound Pressure Level	Cooling	dB(A)	27-31-34	29-34-37	28-32-36	30-34-39	35-39-42	36-40-44
	(Quiet-Lo-Med-High-	Heating	dB(A)	27–31–34	29–34–37	28-32-36	30–34–39	35-39-42	36-40-44
ndoor Unit	SHigh) External Static Pressure	In. W.G.		0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6	0.14-0.2-0.28- 0.4-0.6
	Condensate Lift Mechanism	Max Distance	In. [mm]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]
		Н	ln. [mm]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]
	Dimensions	W	ln. [mm]	35-7/16 [900]	35-7/16 [900]	43-5/16 [1100]	43-5/16 [1100]	55-1/8 [1400]	55-1/8 [1400]
		D	ln. [mm]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]
	Weight	lbs [kg]		58 [26]	60 [27]	67 [30]	67 [30]	84 [38]	91 [41]
	MCA	Α		11.0	11.0	19.0	19.0	25.0	25.0
	MOCP	A	1	28	28	26	26	31	31
		Н	ln. [mm]	24-13/16 [630]	24-13/16 [630]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
D	Dimensions	W	In. [mm] In.	31-13/16 (2+7/16) [809 (+62)]	31-13/16 (2+7/16) [809 (+62)]	37-13/32 [950] 13 (+1-3/16) [330	37-13/32 [950] 13 (+1-3/16) [330	41-5/16 [1050] 13 (+1-3/16) [330	41-5/16 [1050] 13 (+1-3/16) [330
Outdoor Unit		D	[mm]	11-13/16 [300]	11-13/16 [300]	(+30)]	(+30)]	(+30)]	(+30)]
	Weight	lbs [kg]		93 [42]	100 [45]	153 [69]	153 [69]	214 [97]	214 [97]
	Air Flow Rate (Cooling/ Heating)	CFM		1590/1590	1590/1590	1940/1940	1940/1940	3880/3880	3880/3880
	Cound Droce Laval	Cooling	dB(A)	44	44	47	47	52	52
	Sound Pressure Level	Heating	dB(A)	46	46	48	48	53	53
		Gas (O.D.)	ln. [mm]	1/2 [12.7]	1/2 [12.7]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
Ni	Diameter	Liquid (O.D)	ln. [mm]	1/4 [6.35]	1/4 [6.35]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]
	Max. Length	ft [m]		100 [30]	100 [30]	165 [50]	165 [50]	165 [50]	165 [50]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor ⁵	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	А		15	15	25	25	30	30
Refrigerant Ty	/pe			R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed Temperature	Cooling ⁶	°F DB [°C D	B]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]	0 to 115 [-18.0 to 46.0]
Operation Range	Heating	°F DB [°C D	B]	12 to 70 [-11.0 to 21.0]	12 to 70 [-11.0 to 21.0]	-4 to 70 [-20.0 to 21.0]	-4 to 70 [-20.0 to 21.0]	-4 to 70 [-20.0 to 21.0]	-4 to 70 [-20.0 to 21.0]

Conditions

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)
²Heating at 47°F (Indoor // Outdoor)
³Heating at 17°F (Indoor // Outdoor)
⁴Heating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB

70 DB, 60 WB // 5 DB, 4 WB

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0° F - 115° F. Refer to wind baffle documentation for further information. SEACOAST PROTECTION

SEACOAST PROTECTION

External Outer Panel: Phosphate coating + Acrylic-Enamel coating

Fan Motor Support: Epoxy resin coating (at edge face)

Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)

"Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PEAD Specifications | Control | Charles | Char























Wi-Fi I) COMPO (Wiring Russe Util Up Down connection Face Recall Down Face Recall Down Connection Face Recall Down Connection Face Recall Down Connection Face Recall Down Connection Face Recall Down **M** Hyper-heating Heat Pump

Indoor Unit				PEAD-A24AA8	PEAD-A30AA8	PEAD-A36AA8	PEAD-A42AA7	
Outdoor Unit				PUZ-HA24NHA1	PUZ-HA30NKA	PUZ-HA36NKA	PUZ-HA42NKA1	
	l Reference Number			211273264	211273265	211259275	211273266	
and certifice	Capacity	Rated ¹	BTU/H	24,000	30,000	36,000	42,000	
	Capacity Range	Min-Max	BTU/H	10,000–24,000	14,600–30,000	15,600–36,000	17,100–42,000	
	Power Input	Rated ¹	W	2,080	2,350	2,850	3,900	
ooling	Moisture Removal	Pints/h		6.9	6.5	5.2	4.1	
	Sensible Heat Factor	1		0.680	0.760	0.840	0.890	
	Sensible Heat Factor - Hig	h Latent			_	_	_	
	Capacity at 47°F	Rated ²	BTU/H	25,000	32,000	38,000	48,000	
	Capacity Range	Min-Max	BTU/H	10,000–28,000	14,800–34,000	17,400–40,000	21,200	
	Power Input at 47°F	Rated ²	W	1,920	2,740	2,940	3,990	
eating		Rated ³	BTU/H	18,000	21,000	25,400	39,000	
cating	Capacity at 17°F	Max	BTU/H	25,000	32,000	38,000	48,000	
	Capacity at 5°F	Max ⁴	BTU/H	25,000	32,000	38,000	48,000	
	Capacity at -5°F	Max ⁵	BTU/H					
	SEER2	max	2.0	21.6	20.2	20.0	16.3	
	EER2			14.0	14.1	13.0	10.7	
ficiency	HSPF2			10.0	8.8	9.0	9.0	
	COP			3.8	3.4	3.7	3.5	
	ENERGY STAR® Certified			No No	Yes	Yes	No No	
	Air Flow Rate - Cooling	Dry	CFM	512–635–741	618–742–883	847–1024–1201	1042–1254–1483	
	(Quiet-Lo-Med-High-	Wet						
	SHigh)	vvet	CFM	461–572–667	556–668–795	762–922–1081	1002–1214–1443	
	Air Flow Rate - Heating (Quiet-Lo-Med-High- SHigh)	Dry CFM		512-635-741	618–742–883	847–1024–1201	1042–1254–1483	
	Sound Pressure Level	Cooling	dB(A)	28–32–36	30–34–39	35–39–42	36-40-44	
	(Quiet-Lo-Med-High- SHigh)	Heating	dB(A)	28-32-36	30–34–39	35–39–42	36-40-44	
door Unit	External Static Pressure		In. W.G.	0.14-0.2-0.28-0.4-0.6	0.14-0.2-0.28-0.4-0.6	0.14-0.2-0.28-0.4-0.6	0.14-0.2-0.28-0.4-0.6	
	Condensate Lift Mech-	Max	In.	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	27-9/16 [700]	
	anism	Distance H	[mm] In.	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	9-7/8 [250]	
	Dimensions	W In. [mm] D In. [mm]		43-5/16 [1100]	43-5/16 [1100]	55-1/8 [1400]	55-1/8 [1400]	
				28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	28-7/8 [732]	
	Weight	lbs [kg]		67 [30]	67 [30]	84 [38]	91 [41]	
	MCA	Α		17.0	24.0	24.0	36.0	
	МОСР	Α		27	40	40	44	
		Н	ln. [mm]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]	52-11/16 [1338]	
	Dimensions	W	ln. [mm]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]	41-5/16 [1050]	
utdoor Unit		D	ln. [mm]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]	
	Weight	lbs [kg]		190 [86]	261 [118]	261 [118]	283 [128]	
	Air Flow Rate (Cooling/ Heating)	CFM		1940/1940	3880/3880	3880/3880	3319/3319	
		Cooling	dB(A)	52	52	52	49	
	Sound Pressure Level	Heating	dB(A)	53	53	53	51	
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	
iping		Indoor Drain	In. [mm]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	1-1/4 [32]	
	Max. Length	ft [m]	[IIIII]	165 [50]	245 [75]	245 [75]	245 [75]	
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	
	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	
ectrical	Recommended Breaker	Α		25	35	35	40	
ofrigorant To	Size			R410A	R410A	R410A	R410A	
efrigerant Ty iuaranteed				0 to 115	0 to 115	0 to 115	0 to 115	
emperature peration	Cooling ⁶	°F DB [°C D		[-18.0 to 46.0] -13 to 70				
ange	Heating	°F DB [°C D	B]	[-25.0 to 21.0]	[-25.0 to 21.0]	[-25.0 to 21.0]	[-25.0 to 21.0]	

100

Notes:

AHRI Rated Conditions

(Rated data is determined
at a fixed compressor speed)

Heating at 47°F (Indoor // Outdoor)

Heating at 17°F (Indoor // Outdoor)

Heating at 17°F (Indoor // Outdoor)


Conditions
Heating at 5°F (Indoor // Outdoor)

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0°F - 115°F.

80 DB. 67 WB // 95 DB. 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB

70 DB, 60 WB // 5 DB, 4 WB

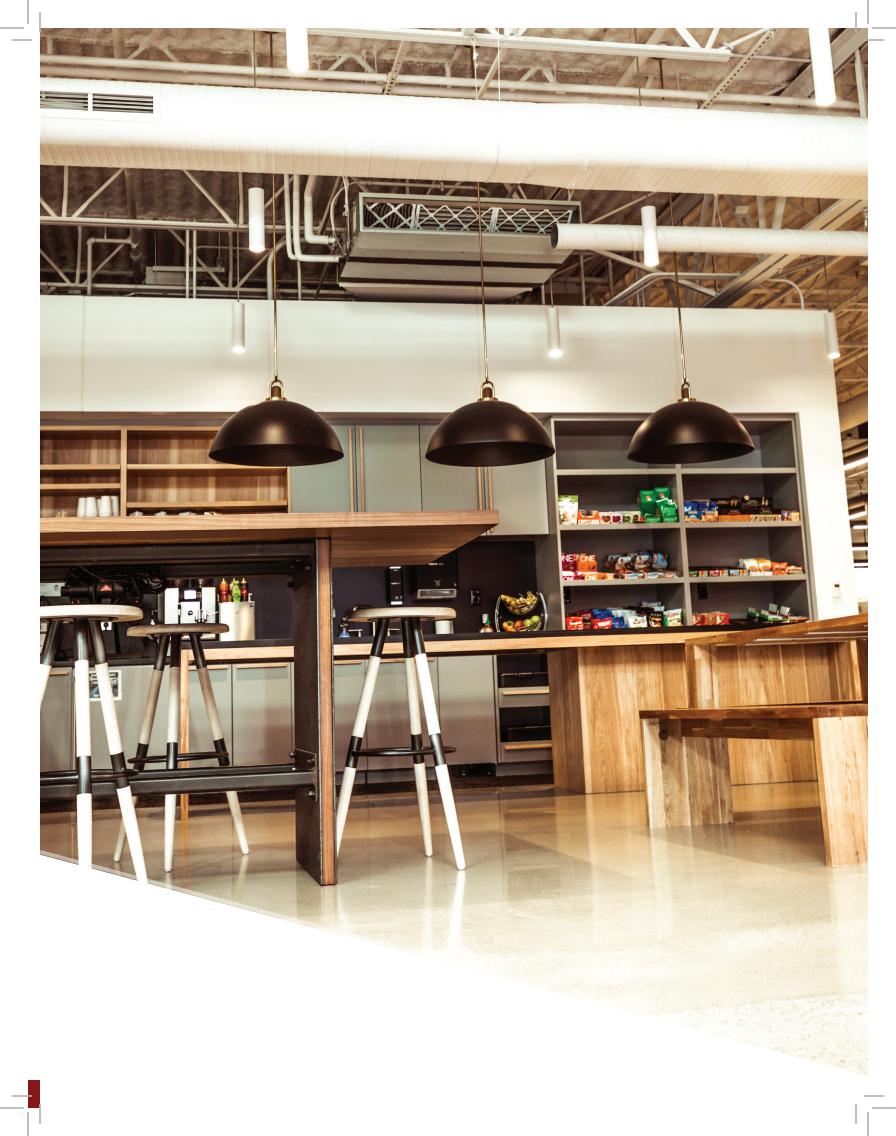

intelli-HEAT™

Cased Coil Indoor Unit





intelli-HEAT™ Dual Fuel System

intelli-HEAT Dual Fuel System will seamlessly replace a traditional unitary air conditioner, add air conditioning to an existing furnace, or be the ideal solution for a new installation. The system intelligently switches between our all-electric heat pump and an existing gas furnace to ensure lower utility bills and reduce greenhouse gas emissions.

Capacities: 18,000 to 36,000 BTU/H

Sound: As low as 24 dB(A)

SEER2: Up to 16.50 **HSPF2**: Up to 9.00 **COP:** Up to 3.55

ENERGY STAR®: Some systems



Carbon Footprint

The intelli-HEAT™ Dual Fuel System can seamlessly replace your unitary air conditioner. intelli-HEAT will intelligently switch over between our all-electric heat pump and an existing gas furnace* based on capacity or economic balance points, making this a true dual fuel system. intelli-HEAT can be connected as a single-zone cooling only, heat pump, or hyperheating heat pump system as well as part of a multizone system.



Single- and Multi-zone Options

intelli-HEAT connects to P-Series, MXZ, and Smart Multi™ outdoor units providing cooling only, heat pump, and hyper-heating options.

intelli-HEAT™ Model Selection



















Cooling Only

Outdoor Units





PUY-A24/30NHA7

PUY-A36/42NKA7



PAA-A18/24/30/36(A/B/C)A1

Heat Pumps





PUZ-A24/30NHA7

PUZ-A36/42NKA7





PUZ-HA24NH1



PUZ-HA30/36NKA

Optional Remote Controllers



PAR-40MAAU



PAC-YT53CRAU-J



PAR-CT01MAU-SB



PAC-SDW01RC-1



MHK2

intelli-HEAT™ Specifications

Cooling Only

Indoor Unit				PAA- A18AA1	PAA- A18BA1	PAA- A24AA1	PAA- A24BA1	PAA- A30AA1	PAA- A30BA1	PAA- A36BA1	PAA- A36CA1	PAA- A42BA1	PAA- A42CA1
Outdoor Unit				PUY- A24NHA7	PUY- A24NHA7	PUY- A24NHA7	PUY- A24NHA7	PUY- A30NHA7	PUY- A30NHA7	PUY-A36N- KA7	PUY-A36N- KA7	PUY-A42N- KA7	PUY-A42N- KA7
AHRI Certified Re	eference Number			209447968	209447968	209447968	209447968	209447972	209447972	209447974	209447974	209447976	209447976
	Capacity	Rated ¹	BTU/H	18,000	18,000	24,000	24,000	30,000	30,000	36,000	36,000	42,000	42,000
	Capacity Range	Min-Max	BTU/H	9,600-18,000	9,600-18,000	10,600-24,000	10,600-24,000	9,600-30,000	9,600-30,000	17,800-36,000	17,800-36,000	19,800-42,000	19,800-42,000
c !:	Power Input	Rated ¹	W	1,440	1,440	1,920	1,920	3,000	3,000	3,600	3,600	4,420	4,420
Cooling	Moisture Removal	Pints/h		3.7	3.7	5.0	5.0	6.8	6.8	7.5	7.5	8.0	8.0
	Sensible Heat Factor			0.770	0.770	0.770	0.770	0.750	0.750	0.770	0.770	0.790	0.790
	Sensible Heat Factor - High Later	nt		_	_	_	_	_	_	_	_	_	_
	Capacity at 47°F	Rated ²	BTU/H	_	_	_	_	_	_	_	_	_	_
	Capacity Range	Min-Max	BTU/H	_	_	_	_	_	_	_	_	_	_
	Power Input at 47°F	Rated ²	W	_	_	_	_	_	_	_	_	_	_
Heating	·	Rated ³	BTU/H		_	_	_	_	_	_	_	_	_
ricating	Capacity at 17°F	Max	BTU/H		_	_	_	_	_	_	_	_	
	Capacity at 5°F	Max ⁴	BTU/H		_	_	_		_	_	_	_	_
	Capacity at -5°F	Max 5	BTU/H	_	_	_	_		_		_	_	_
	SEER2	IVIGA	DIO/II	16.5	16.5	16.5	16.5	14.5	14.5	15.0	15.0	14.3	14.3
	EER2			10.5	10.5	10.5	10.5	14.5	14.3	13.0	13.0	14.5	14.5
Efficiency	HSF2					_	_	_	_	_	_		
	COP			_	_	-		-		_	_		
		-	CEL 4							4050	4050		4225
	Rated Airflow	Dry	CFM	525	525	700	700	875	875	1050	1050	1225	1225
	Maximum Airflow	Dry	CFM	812	812	830	830	1024	1024	1201	1201	1660	1660
	Minimum Airflow	Dry	CFM	424	424	551	551	700	700	800	800	936	936
			In. W.G.	0.09	0.07	0.18	0.12	0.24	0.18	0.21	0.19	0.27	0.26
Indoor Unit	Control Box Weight	lbs [kg]		11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]
	Dimensions	Н	In. [mm]	27.4 [696.0]	27.4 [696.0]	27.4 [696.0]	27.4 [696.0]	27.4 [696.0]	27.4 [696.0]	31.9 [810.3]	31.9 [810.3]	31.9 [810.3]	31.9 [810.3]
		W	In. [mm]	14.5 [368.3]	17.5 [445.0]	14.5 [368.3]	17.5 [445.0]	14.5 [368.3]	17.5 [445.0]	17.5 [445.0]	21.0 [533.4]	17.5 [445.0]	21.0 [533.4]
		D	In. [mm]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]
	Unit Weight [Cased Coil Only]	lbs [kg]		47 [21.0]	54 [24.0]	48 [22.0]	58 [26.0]	48 [22.0]	58 [26.0]	67 [31.0]	82 [37.0]	67 [31.0]	82 [37.0]
	MCA	Α		19.0	19.0	19.0	19.0	19.0	19.0	25.0	25.0	25.0	25.0
	MOCP	A		26	26	26	26	26	26	31	31	31	31
		Н	In. [mm]	37-1/8 [943]	37-1/8 [943]	37-1/8 [943]	37-1/8 [943]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	37-13/32 [950]	37-13/32 [950]	37-13/32 [950]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)
			[]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]
	Weight	lbs [kg]		151 [68]	151 [68]	151 [68]	151 [68]	151 [68]	151 [68]	211 [96]	211 [96]	211 [96]	211 [96]
	Air Flow Rate (Cooling/Heating)	CFM		1940/—	1940/—	1940/—	1940/—	1940/—	1940/—	3880/—	3880/—	3880/—	3880/—
	Sound Pressure Level	Cooling	dB(A)	47	47	47	47	47	47	52	52	52	52
	Sound Fressure Eever	Heating	dB(A)			_	_	_	_	_	_		
		Gas (0.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]
	Max. Length	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
Flantina!	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	Α		25	25	25	25	25	25	30	30	30	30
Refrigerant Type				R410A									
Guaranteed Temperature	Cooling ⁶	°F DB [°C DB]		-40 to 115 [-40.0 to 46.0]									
Operation Range	Heating	°F DB [°C DB]		_	_	_		_	_	_	_	_	_

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor)

°F 80 DB, 67 WB // 95 DB, 75 WB

at a fixed compressor speed)

*Indoor units receive power from outdoor units through field-supplied interconnected wiring.

*Wind baffles required to operate below 23°F D8 in cooling mode. PUY with wind baffle: -40°F - 115°F. Refer to wind baffle documentation for further information.

SEACOAST PROTECTION

**External Outer Panel: Phosphate coating + Acrylic-Enamel coating

**Fan Motor Support: Epoxy resin coating (at edge face)

**Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)

**Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

intelli-HEAT™ Specifications

Heat Pump

Indoor Unit				PAA- A18AA1	PAA- A18BA1	PAA- A24AA1	PAA- A24BA1	PAA- A30AA1	PAA- A30BA1	PAA- A36BA1	PAA- A36CA1	PAA- A42BA1	PAA- A42CA1
Outdoor Unit				PUZ- A24NHA7	PUZ- A24NHA7	PUZ- A24NHA7	PUZ- A24NHA7	PUZ- A30NHA7	PUZ- A30NHA7	PUZ-A36N- KA7	PUZ-A36N- KA7	PUZ-A42N- KA7	PUZ-A42N- KA7
AHRI Certified Re	eference Number			209447978	209447978	209447978	209447978	209447982	209447982	209447984	209447984	209447986	209447986
	Capacity	Rated ¹	BTU/H	18,000	18,000	24,000	24,000	30,000	30,000	36,000	36,000	42,000	42,000
	Capacity Range	Min-Max	BTU/H	9,600-18,000	9,600-18,000	10,600-24,000	10,600-24,000	9,600-30,000	9,600-30,000	17,800-36,000	17,800-36,000	19,800-42,000	19,800-42,000
6 l'	Power Input	Rated ¹	W	1,440	1,440	1,920	1,920	3,000	3,000	3,600	3,600	4,420	4,420
Cooling	Moisture Removal	Pints/h		3.7	3.7	5.0	5.0	6.8	6.8	7.5	7.5	8.0	8.0
	Sensible Heat Factor			0.770	0.770	0.770	0.770	0.750	0.750	0.770	0.770	0.790	0.790
	Sensible Heat Factor - High Late	nt		_	_	_	_	_	_	_	_	_	_
	Capacity at 47°F	Rated ²	BTU/H	19,000	19,000	26,000	26,000	32,000	32,000	38,000	38,000	46,000	46,000
	Capacity Range	Min-Max	BTU/H	11,900-22,400	11,900-22,400	12,400-31,000	12,400-31,000	13,100-35,200	13,100-35,200	19,400-43,000	19,400-43,000	20,600-49,600	20,600-49,600
	Power Input at 47°F	Rated ²	W	1,740	1,740	2,140	2,140	2,640	2,640	3,590	3,590	4,490	4,490
Heating	•	Rated ³	BTU/H	13,800	13,800	15,600	15,600	21,000	21,000	29,400	29,400	32,800	32,800
ricuting	Capacity at 17°F	Max	BTU/H	13,800	13,800	15,400	15,400	20,800	20,800	29,000	29,000	32,400	32,400
	Capacity at 5°F	Max ⁴	BTU/H	12,400	12,400	13,900	13,900	18,700	18,700	26,300	26,300	29,300	29,300
	Capacity at -5°F	Max 5	BTU/H	12,400	12,400	15,500		10,700	10,700	20,300	20,300	25,500	25,500
	SEER2	IVIGA	DIO/II	16.5	16.5	16.5	16.5	14.5	14.5	15.0	15.0	14.3	14.3
	EER2			10.5	10.5	10.5	10.5	14.5	14.3	15.0	15.0	14.5	14.5
Efficiency	HSF2												
				9.0	9.0	9.0	9.0	9.0	9.0	8.5	8.5	8.5	8.5
	COP	1_		3.2	3.2	3.55	3.55	3.55	3.55	3.1	3.1	3.0	3.0
	Rated Airflow	Dry	CFM	525	525	700	700	875	875	1050	1050	1225	1225
	Maximum Airflow	Dry	CFM	812	812	830	830	1024	1024	1201	1201	1660	1660
	Minimum Airflow	Dry	CFM	424	424	551	551	700	700	800	800	936	936
	Internal Static Pressure [at Rate	d CFM]	In. W.G.	0.09	0.07	0.18	0.12	0.24	0.18	0.21	0.19	0.27	0.26
Indoor Unit	Control Box Weight	lbs [kg]		11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]
	Dimensions	Н	In. [mm]	27.4 [696.0]	27.4 [696.0]	27.4 [696.0]	27.4 [696.0]	27.4 [696.0]	27.4 [696.0]	31.9 [810.3]	31.9 [810.3]	31.9 [810.3]	31.9 [810.3]
		W	In. [mm]	14.5 [368.3]	17.5 [445.0]	14.5 [368.3]	17.5 [445.0]	14.5 [368.3]	17.5 [445.0]	17.5 [445.0]	21.0 [533.4]	17.5 [445.0]	21.0 [533.4]
		D	In. [mm]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]
	Unit Weight [Cased Coil Only]	lbs [kg]		47 [21.0]	54 [24.0]	48 [22.0]	58 [26.0]	48 [22.0]	58 [26.0]	67 [31.0]	82 [37.0]	67 [31.0]	82 [37.0]
	MCA	Α		19.0	19.0	19.0	19.0	19.0	19.0	25.0	25.0	25.0	25.0
	MOCP	Α		26	26	26	26	26	26	31	31	31	31
		Н	In. [mm]	37-1/8 [943]	37-1/8 [943]	37-1/8 [943]	37-1/8 [943]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	37-13/32 [950]	37-13/32 [950]	37-13/32 [950]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In [man]	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)	13 (+1-3/16)
		U	In. [mm]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]	[330 (+30)]
	Weight	lbs [kg]		153 [69]	153 [69]	153 [69]	153 [69]	153 [69]	153 [69]	214 [97]	214 [97]	214 [97]	214 [97]
	Air Flow Rate (Cooling/Heating)	CFM		1940/1940	1940/1940	1940/1940	1940/1940	1940/1940	1940/1940	3880/3880	3880/3880	3880/3880	3880/3880
	Count December Louis	Cooling	dB(A)	47	47	47	47	47	47	52	52	52	52
	Sound Pressure Level	Heating	dB(A)	48	48	48	48	48	48	53	53	53	53
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain	In. [mm]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]
1 3	Max. Length	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor 5	V, ph, Hz					208/230, 1, 60		208/230, 1, 60				
Electrical	Recommended Breaker Size	Α		25	25	25	25	25	25	30	30	30	30
Refrigerant Type	necommended breaker 3/28	17		R410A	R410A	R410A	R410A						
Guaranteed				0 to 115	0 to 115	0 to 115	0 to 115						
Temperature	Cooling ⁶	°F DB [°C DB]	l	[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]						
Operation	Heating	°F DB [°C DB		-4 to 70	-4 to 70	-4 to 70	-4 to 70						
Range	ricatily	, DD [C DD	1	[-20.0 to 21.0]	[-20.0 to 21.0]	[-20.0 to 21.0]	[-20.0 to 21.0]						

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed) Notes:

AHRI Rated Conditions

1 'Cooling (Indoor // Outdoor)

4 Heating at 47°F (Indoor // Outdoor)

5 TO DB, 60 WB // 97 DB, 43 WB at a fixed compressor speed)

4 Heating at 17°F (Indoor // Outdoor)

6 TO DB, 60 WB // 47 DB, 43 WB at a fixed compressor speed)

4 Heating at 17°F (Indoor // Outdoor)

6 TO DB, 60 WB // 17 DB, 15 WB Conditions

4 Heating at 5°F (Indoor // Outdoor)

6 TO DB, 60 WB // 17 DB, 15 WB Conditions

4 Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0°F - 115°F. Refer to wind baffle documentation for further information.

SEACOAST PROTECTION

• External Outer Panel: Phosphate coating + Acrylic-Enamel coating

• Fan Motor Support: Epoxy resin coating (at edge face)

• Separator Assembly, Valve Bed: Epoxy resin coating (at edge face)

• "Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

intelli-HEAT™ Specifications

Hyper-heating Heat Pump

Indoor Unit				PAA-A24AA1	PAA-A24BA1	PAA-A30AA1	PAA-A30BA1	PAA-A36BA1	PAA-A36CA1
Outdoor Unit				PUZ-HA24NHA1	PUZ-HA24NHA1	PUZ-HA30NKA	PUZ-HA30NKA	PUZ-HA36NKA	PUZ-HA36NKA
AHRI Certified R	Reference Number			211273264	211273264	211273265	211273265	211259275	211259275
	Capacity	Rated ¹	BTU/H	24.000	24.000	30.000	30,000	36.000	36.000
	Capacity Range	Min-Max	BTU/H	11,800–24,000	11,800–24,000	17,000–30,000	17,000–30,000	16,600–36,000	16,600–36,000
	Power Input	Rated ¹	W	2,180	2,180	2,400	2,400	3,270	3,270
Cooling	Moisture Removal	Pints/h		5.0	5.0	6.2	6.2	7.5	7.5
	Sensible Heat Factor	TITIOTT		0.770	0.770	0.770	0.770	0.770	0.770
	Sensible Heat Factor - High Later	nt		-	0.770	0.770	0.770	0.770	0.770
	Capacity at 47°F	Rated ²	BTU/H	26,000	26,000	32,000	32,000	38,000	38,000
	Capacity Range	Min-Max	BTU/H	11,100–26,000	11,100–26,000	16,100–35,400	16,100–35,400	20,500–42,000	20,500–42,000
	Power Input at 47°F	Rated ²	W	2,140	2,140	2,640	2,640	3,530	3,530
Heating	rower input at 47 i	Rated ³	BTU/H	16,600	16,600	23,200	23,200	28,400	28,400
reaurig	Capacity at 17°F	Max	BTU/H	26,000	26,000	32,000	32,000	38,000	38,000
	Connector at EOF	Max ⁴	BTU/H						
	Capacity at 5°F	Max ⁵		26,000	26,000	32,000	32,000	38,000	38,000
	Capacity at -5°F	iviax	BTU/H	<u> </u>	-	- 20.2	- 20.2		
	SEER2			21.6	21.6	20.2	20.2	20.0	20.0
fficiency	EER2								
,	HSF2			10.0	10.0	8.8	8.8	9.0	9.0
	СОР			3.55	3.55	3.55	3.55	3.15	3.15
	Rated Airflow	Dry	CFM	700	700	875	875	1050	1050
	Maximum Airflow	Dry	CFM	830	830	1024	1024	1201	1201
	Minimum Airflow	Dry	CFM	551	551	700	700	800	800
	Internal Static Pressure [at Rated	CFM]	In. W.G.	0.18	0.12	0.24	0.18	0.21	0.19
ndoor Unit	Control Box Weight	3 - 3-		11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]	11.00 [4.99]
		Н	In. [mm]	27.4 [696.0]	27.4 [696.0]	27.4 [696.0]	27.4 [696.0]	31.9 [810.3]	31.9 [810.3]
	Dimensions	W	In. [mm]	14.5 [368.3]	17.5 [445.0]	14.5 [368.3]	17.5 [445.0]	17.5 [445.0]	21.0 [533.4]
		D	In. [mm]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]	21.7 [551.2]
	Unit Weight [Cased Coil Only]	lbs [kg]		48 [22.0]	58 [26.0]	48 [22.0]	58 [26.0]	67 [31.0]	82 [37.0]
	MCA	Α		17.0	17.0	24.0	24.0	24.0	24.0
	MOCP	Α		27	27	40	40	40	40
		Н	In. [mm]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit		D	In. [mm]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]
	Weight	lbs [kg]		190 [86]	190 [86]	261 [118]	261 [118]	261 [118]	261 [118]
	Air Flow Rate (Cooling/Heating)	CFM		1940/1940	1940/1940	3880/3880	3880/3880	3880/3880	3880/3880
	. 3 3.	Cooling	dB(A)	52	52	52	52	52	52
	Sound Pressure Level	Heating	dB(A)	53	53	53	53	53	53
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping	Diameter	Indoor Drain		3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]	3/4 [19.05]
iping	Max. Length	ft [m]	III. [IIIIII]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]	100 [30]
	Max. Height	ft [m]		100 [30]		100 [30]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor ⁵				100 [30]		- ' '		
Electrical		V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
	Recommended Breaker Size	Α		25	25	35	35	35	35
Refrigerant Type	2			R410A	R410A	R410A	R410A	R410A	R410A
Guaranteed Femperature	Cooling ⁶	°F DB [°C DB]	0 to 115 [-18.0 to 46.0]					
Temperature Operation				-13 to 70					
- perunon	Heating	°F DB [°C DB	1	[-25.0 to 21.0]					

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

AHRI Rated Conditions
(Rated data is determined Atlant Bard Cooling (Indoor // Outdoor)
(Rated data is determined Atlant Bard Compressor speed)
at a fixed compressor speed)
'Heating at 17°F (Indoor // Outdoor)
Conditions
'Indoor units receive power from outdoor units through field-supplied interconnected wiring.

'Wind baffles required to operate below 23°F DB in cooling mode. PUZ with wind baffle: 0° F - 115° F.

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB



PCA

Ceiling-suspended Indoor Unit





Ceiling-suspended Indoor Unit

The PCA Ceiling-suspended Indoor Unit is ideal for larger retail stores, commercial kitchens, classrooms, and office spaces. The PCA features automatic airspeed adjustment and high/low ceiling modes. An optional i-see Sensor™ scans the room temperature and occupant locations to deliver additional airflow control.

Capacities: 24,000 to 42,000 BTU/H

Sound: As low as 33 dB(A)

SEER2: Up to 21.00 **HSPF2**: Up to 9.50

COP: Up to 4.62

ENERGY STAR®: Some systems



High/Low-ceiling Modes

High- and Low-ceiling Operation modes match the airflow volume to the room height. This option adjusts the airflow volume and ensures even temperature distribution throughout the room.



Automatic Air-speed Adjustment

The Automatic Air-speed Adjustment setting changes the speed to match the room environment conditions. The airflow is set to high at the start of the heating or cooling operation, quickly conditioning the space. When the room temperature reaches the set point, the airflow decreases automatically for stable, comfortable heating and cooling operation.

PCA Model Selection



















Cooling Only

Outdoor Units







PUY-A24/30NHA7

PUY-A36/42NKA7



PCA-A24/30/36/42KA7

Heat Pumps



PUZ-A24/30NHA7



PUZ-A36/42NKA7

Hyper-heating Heat Pumps



PUZ-HA24NH1



PUZ-HA30/36NKA



PUZ-HA42NK1

Optional Remote Controllers



PAR-40MAAU



PAC-YT53CRAU-J



PAR-CT01MAU-SB



PAC-SDW01RC-1



MHK2



PCA Specifications









Wi-Fi i) Composition (Wiring Reuse Lift U) Composition (Wiring Reuse Lift

















Cooling Only

Indoor Unit				PCA-A24KA7	PCA-A30KA7	PCA-A36KA7	PCA-A42KA7
Outdoor Unit				PUY-A24NHA7	PUY-A30NHA7	PUY-A36NKA7	PUY-A42NKA7
HRI Certified Re	eference Number			209447968	209447972	209447974	209447976
	Capacity	Rated ¹	BTU/H	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	10,000–24,000	9,000–30,000	16,000–36,000	16,000–42,000
	Power Input	Rated ¹	W	1,960	3,190	3,270	4,110
oling	Moisture Removal	Pints/h		5.8	8.3	8.7	11.7
	Sensible Heat Factor	1		0.730	0.690	0.730	0.690
	Sensible Heat Factor - High Later	nt		20	20	20	20
	Capacity at 47°F	Rated ²	BTU/H		_	_	
	Capacity Range	Min-Max	BTU/H		_	_	
	Power Input at 47°F	Rated ²	W		_	_	
eating	rower input at 47 i	Rated ³	BTU/H		_	<u> </u>	
aung	Capacity at 17°F	Max	BTU/H		_	<u> </u>	_
	Composituret FOF				_	_	
	Capacity at 5°F	Max ⁴	BTU/H				
	Capacity at -5°F	Max 5	BTU/H	— 46.5		— 45.0	
	SEER2			16.5	14.5	15.0	14.3
ficiency	EER2			12.0	9.5	10.5	9.0
•	HSPF2				_	_	
	СОР				_	_	
	Air Flow Rate - Cooling	Dry	CFM	530–565–600–670	565–600–635–705	775–850–920–990	810–885–955–1025
A	(Quiet-Lo-Med-High-SHigh) Air Flow Rate - Heating	Wet	CFM	495–530–565–635	530–565–600–670	705–775–850–920	740–810–885–955
	(Quiet-Lo-Med-High-SHigh)	Dry	CFM	530-565-600-670	565-600-635-705	775–850–920–990	810–885–955–1025
	Sound Pressure Level	Cooling	dB(A)	33-35-37-40	35–37–39–41	37–39–41–43	39-41-43-45
door Unit	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	33–35–37–40	35–37–39–41	37–39–41–43	39–41–43–45
aoor omit	External Static Pressure		In. W.G.		_	_	
	Condensate Lift Mechanism	Max Distance		<u> </u>	_	_	
	Dimensions	Н	In. [mm]	9-1/16 [230]	9-1/16 [230]	9-1/16 [230]	9-1/16 [230]
		W	In. [mm]	50-3/8 [1280]	50-3/8 [1280]	63 [1600]	63 [1600]
		D	In. [mm]	26-3/4 [680]	26-3/4 [680]	26-3/4 [680]	26-3/4 [680]
	Weight	lbs [kg]		71 [32]	71 [32]	79 [36]	86 [39]
	MCA	Α		19.0	19.0	25.0	25.0
	MOCP	Α		26	26	31	31
		Н	In. [mm]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
utdoor Unit		D	In. [mm]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
	Weight	lbs [kg]		151 [68]	151 [68]	211 [96]	211 [96]
	Air Flow Rate (Cooling/Heating)	CFM		1940/—	1940/—	3880/—	3880/—
	s 10 1 1	Cooling	dB(A)	47	47	52	52
	Sound Pressure Level	Heating	dB(A)	_	_	_	_
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
oing			In. [mm]	1-1/32 [26]	1-1/32 [26]	1-1/32 [26]	1-1/32 [26]
3	Max. Length	ft [m]	. p	225 [68]	225 [68]	225 [68]	225 [68]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor ⁵	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
ectrical	Recommended Breaker Size	Α		25	25	30	30
frigerant Type	necommended breaker size	P4		R410A	R410A	R410A	R410A
uaranteed				-40 to 115	-40 to 115	-40 to 115	-40 to 115
emperature	Cooling ⁶	°F DB [°C DB]		[-40.0 to 46.0]	[-40.0 to 46.0]	[-40.0 to 46.0]	[-40.0 to 46.0]
peration	Heating	°F DB [°C DB]					
ange	пеаину	L DR [-C DR]		_	_	_	-

Notes:
AHRI Rated Conditions

'Cooling (Indoor // Outdoor)

"F 80 DB, 67 WB // 95 DB, 75 WB

(Rated data is determined
at a fixed compressor speed)

'Indoor units receive power from outdoor units through field-supplied interconnected wiring.

'Wind baffles required to operate below 23°F DB in cooling mode. PUY with wind baffle: -40°F - 115°F. Refer to wind baffle documentation for further information.

SEACOAST PROTECTION

External Outer Panel: Phosphate coating + Acrylic-Enamel coating

Fan Motor Support: Epoxy resin coating (at edge face)

Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)

"Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PCA Specifications







COMPO Wiring Reuse Drain Lift Up Down Connection Fair Recall



















Indoor Unit				PCA-A24KA7	PCA-A30KA7	PCA-A36KA7	PCA-A42KA7
Outdoor Unit				PUZ-A24NHA7	PUZ-A30NHA7	PUZ-A36NKA7	PUZ-A42NKA7
AHRI Certified Re	ference Number			209447978	209447982	209447984	209447986
	Capacity	Rated ¹	BTU/H	24,000	30,000	36,000	42,000
	Capacity Range	Min-Max	BTU/H	10,000-24,000	9,000–30,000	16,000–36,000	16,000–42,000
	Power Input	Rated ¹	W	1,960	3,190	3,270	4,110
Cooling	Moisture Removal	Pints/h		5.8	8.3	8.7	11.7
	Sensible Heat Factor			0.730	0.690	0.730	0.690
	Sensible Heat Factor - High Later	nt		20	20	20	20
	Capacity at 47°F	Rated ²	BTU/H	26,000	32.000	38,000	45.000
	Capacity Range	Min-Max	BTU/H	8,800–28,000	8,600–34,000	17,900–40,000	18,100–48,000
	Power Input at 47°F	Rated ²	W	1,800	2,520	2,410	3,480
Heating	·	Rated ³	BTU/H	15,400	18.800	21,000	31.800
	Capacity at 17°F	Max	BTU/H	17,900	21,600	24,400	35,000
	Capacity at 5°F	Max ⁴	BTU/H	14,900	18,000	20,000	30,500
	Capacity at -5°F	Max 5	BTU/H	_	_	_	_
	SEER2	1	1 - 1 - 1 - 1	16.5	14.5	15.0	14.3
	EER2			12.0	9.5	10.5	9.0
Efficiency	HSPF2			9.0	9.0	8.5	8.5
	COP			4.23	3.72	4.62	3.78
	Air Flow Rate - Cooling	Dry	CFM	530–565–600–670	565-600-635-705	775–850–920–990	810–885–955–1025
	(Quiet-Lo-Med-High-SHigh)	Wet	CFM	495–530–565–635	530–565–600–670	705-775-850-920	740-810-885-955
	Air Flow Rate - Heating (Quiet-Lo-Med-High-SHigh)	Dry	CFM	530–565–600–670	565–600–635–705	775–850–920–990	810–885–955–1025
	Sound Pressure Level	Cooling	dB(A)	33–35–37–40	35–37–39–41	37–39–41–43	39-41-43-45
	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	33–35–37–40	35–37–39–41	37–39–41–43	39–41–43–45
Indoor Unit	External Static Pressure	1	In. W.G.		_	_	_
	Condensate Lift Mechanism	Max Distance	-	_	_	_	_
	Condensate Ent Medianism	Н	In. [mm]	9-1/16 [230]	9-1/16 [230]	9-1/16 [230]	9-1/16 [230]
	Dimensions	W	In. [mm]	50-3/8 [1280]	50-3/8 [1280]	63 [1600]	63 [1600]
		D	In. [mm]	26-3/4 [680]	26-3/4 [680]	26-3/4 [680]	26-3/4 [680]
	Weight	lbs [kq]	[]	71 [32]	71 [32]	79 [36]	86 [39]
	MCA	A		19.0	19.0	25.0	25.0
	MOCP	Α		26	26	31	31
	moei .	Н	In. [mm]	37-1/8 [943]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]
Outdoor Unit	Difficilisions	D	In. [mm]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]	13 (+1-3/16) [330 (+30)]
0444001 01111	Weight	lbs [kg]	[]	153 [69]	153 [69]	214 [97]	214 [97]
	Air Flow Rate (Cooling/Heating)	- 0		1940/1940	1940/1940	3880/3880	3880/3880
		Cooling	dB(A)	47	47	52	52
	Sound Pressure Level	Heating	dB(A)	48	48	53	53
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
Piping		Indoor Drain		1-1/32 [26]	1-1/32 [26]	1-1/32 [26]	1-1/32 [26]
pg	Max. Length	ft [m]	[]	165 [50]	165 [50]	165 [50]	165 [50]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor 5	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Electrical	Recommended Breaker Size	Α		25	25	30	30
Refrigerant Type				R410A	R410A	R410A	R410A
Guaranteed	G 11 (or pp /		0 to 115	0 to 115	0 to 115	0 to 115
Temperature	Cooling ⁶	°F DB [°C DB]		[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]
Operation	Heating	°F DB [°C DB]		-4 to 70	-4 to 70	-4 to 70	-4 to 70
Range		. 55 [C 55]		[-20.0 to 21.0]	[-20.0 to 21.0]	[-20.0 to 21.0]	[-20.0 to 21.0]

Notes: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB

70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB

at a fixed compressor speed)

"Heating at 17"F (Indoor // Outdoor)

"F 70 DB, 60 WB // 17 DB, 15 WB

Conditions

"Heating at 57"F (Indoor // Outdoor)

"F 70 DB, 60 WB // 17 DB, 15 WB

Indoor units receive power from outdoor units through field-supplied interconnected wiring.

Wind baffles required to operate below 23"F DB in cooling mode. PUZ with wind baffle: 0" F - 115" F. Refer to wind baffle documentation for further information.

SEACOAST PROTECTION

External Outer Panel: Phosphate coating + Acrylic-Enamel coating

Fan Motor Support: Epoxy resin coating (at edge face)

Separator Assembly; Valve Bed: Epoxy resin coating (at edge face)

"Blue Fin" treatment is an anti-corrosion treatment that is applied to the condenser coil to protect it against airborne contaminants.

PCA Specifications























Wi-Fi I) COMPO Wiring Ruse Drain Down Connection Face Recall **#** Hyper-heating Heat Pump

Indoor Unit				PCA-A24KA7	PCA-A30KA7	PCA-A36KA7	PCA-A42KA7
Outdoor Unit				PUZ-HA24NHA1	PUZ-HA30NKA	PUZ-HA36NKA	PUZ-HA42NKA1
HRI Certified Re	eference Number			206223004	206223005	211259275	206223007
	Capacity	Rated ¹	BTU/H	23,000	30,000	34,000	42,000
	Capacity Range	Min-Max	BTU/H	10,000–24,000	14,300–30,000	14,900–34,000	16,600–42,000
	Power Input	Rated ¹	W	1.840	2.380	2.700	4.050
ooling	Moisture Removal	Pints/h		5.6	8.3	7.9	10.6
	Sensible Heat Factor			0.730	0.690	0.740	0.720
	Sensible Heat Factor - High Later	nt		_		_	
	Capacity at 47°F	Rated ²	BTU/H	26,000	32,000	38,000	48,000
	Capacity Range	Min-Max	BTU/H	10,000–28,000	14,400–35,000	17,400–40,000	24,000–54,000
	Power Input at 47°F	Rated ²	W	2,050	2,930	3,360	4,760
eating	Tower input at 47 T	Rated ³	BTU/H	17,700	22,200	25,400	38,500
aung	Capacity at 17°F	Max	BTU/H	26,000	32,000	38,000	48,000
	Capacity at E0E	Max ⁴	BTU/H	·	· · · · · · · · · · · · · · · · · · ·	·	
	Capacity at 5°F Capacity at -5°F	Max 5	BTU/H	26,000	32,000	38,000	48,000
		IVIdX	ртогн	21.6		20.0	
	SEER2				20.2		16.3
ficiency	EER2			14.0	14.1	13.0	10.7
	HSPF2			10.0	8.8	9.0	9.0
	СОР	_		3.71	3.2	3.31	2.95
	Air Flow Rate - Cooling	Dry	CFM	530–565–600–670	565–600–635–705	775–850–920–990	810–885–955–1025
	(Quiet-Lo-Med-High-SHigh) Air Flow Rate - Heating	Wet	CFM	495–530–565–635	530–565–600–670	705–775–850–920	740–810–885–955
	(Quiet-Lo-Med-High-SHigh)	Dry	CFM	530–565–600–670	565-600-635-705	775–850–920–990	810–885–955–1025
	Sound Pressure Level	Cooling	dB(A)	33–35–37–40	35–37–39–41	37–39–41–43	39–41–43–45
door Unit	(Quiet-Lo-Med-High-SHigh)	Heating	dB(A)	33–35–37–40	35–37–39–41	37–39–41–43	39–41–43–45
door Unit	External Static Pressure		In. W.G.	<u> </u>	<u> </u>	_	_
	Condensate Lift Mechanism	Max Distance	In. [mm]	<u> </u>	<u> </u>	_	_
	Dimensions	Н	In. [mm]	9-1/16 [230]	9-1/16 [230]	9-1/16 [230]	9-1/16 [230]
		W	In. [mm]	50-3/8 [1280]	50-3/8 [1280]	63 [1600]	63 [1600]
		D	In. [mm]	26-3/4 [680]	26-3/4 [680]	26-3/4 [680]	26-3/4 [680]
	Weight	Veight lbs [kg]		71 [32]	71 [32]	79 [36]	86 [39]
	MCA	Α		17.0	24.0	24.0	36.0
	MOCP	A		27	40	40	44
		Н	In. [mm]	37-1/8 [943]	52-11/16 [1338]	52-11/16 [1338]	52-11/16 [1338]
	Dimensions	W	In. [mm]	37-13/32 [950]	41-5/16 [1050]	41-5/16 [1050]	41-5/16 [1050]
utdoor Unit		D	In. [mm]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]	14-3/16 [360]
	Weight	lbs [kg]		190 [86]	261 [118]	261 [118]	283 [128]
	Air Flow Rate (Cooling/Heating)			1940/1940	3880/3880	3880/3880	3319/3319
	s 10 1 1	Cooling	dB(A)	52	52	52	49
	Sound Pressure Level	Heating	dB(A)	53	53	53	51
		Gas (O.D.)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]
	Diameter	Liquid (O.D)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]
oing			In. [mm]	1-1/32 [26]	1-1/32 [26]	1-1/32 [26]	1-1/32 [26]
3	Max. Length	ft [m]		165 [50]	245 [75]	245 [75]	245 [75]
	Max. Height	ft [m]		100 [30]	100 [30]	100 [30]	100 [30]
	Outdoor-Indoor ⁵	V, ph, Hz		208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
ectrical	Recommended Breaker Size	Α		25	35	35	40
frigerant Type	necommenueu breaker 3128	^	-	R410A	R410A	R410A	R410A
uaranteed				0 to 115	0 to 115	0 to 115	0 to 115
uaranteeu emperature	Cooling ⁶	°F DB [°C DB]		[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]	[-18.0 to 46.0]
peration	Heating	0E DD foc DD1		-13 to 70	-13 to 70	-13 to 70	-13 to 70
ange	Heating	°F DB [°C DB]		[-25.0 to 21.0]	[-25.0 to 21.0]	[-25.0 to 21.0]	[-25.0 to 21.0]


AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

AHRI Rated Conditions

(Rated data is determined 'Pheating at 47°F (Indoor // Outdoor) °F (Rated data is determined 'Pheating at 17°F (Indoor // Outdoor) °F (Conditions 'Pheating at 5°F (Indoor // Outdoor) °F (Pheating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB 70 DB, 60 WB // 5 DB, 4 WB



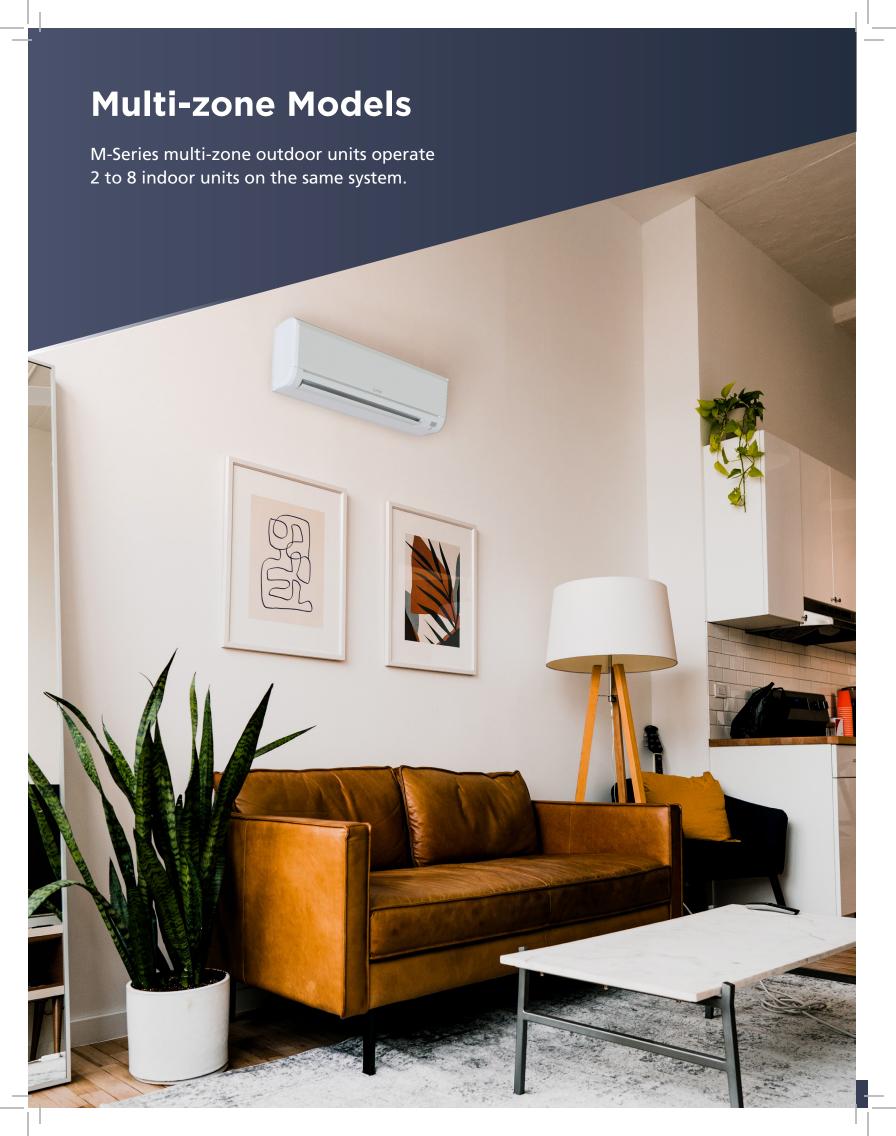

Multi-Zone Product Range

Indoor Units



MSZ-EF Wall-mounted



Multi-position Air Handler

EZ FIT® Recessed **Ceiling Cassette**





PLA Model Ceiling Cassette



PCA **Ceiling Suspended**



MFZ-KJ Floor-mounted



Horizontal-ducted



Horizontal-ducted



intelli-HEAT™ **Cased Coil**

Outdoor Units

Heat Pumps



MXZ-2C20NA2 2-port Connection Connects up to 2 Indoor Units



MXZ-3C24NA3 MXZ-3C30NA3 **3-port Connection**

Connects up to 3 Indoor Units



MXZ-4C36NA3 **4-port Connection**



MXZ-5C42NA3 5-port Connection

Connects up to 4 Indoor Units

Connects up to 5 Indoor Units

Hyper-heating INVERTER® Heat Pumps



MXZ-2C20NAHZ2 2-port Connection Connects up to 2 Indoor Units



MXZ-3C24NAHZ2 MXZ-3C30NAHZ2

3-port Connection

Connects up to 3 Indoor Units

Verify System Compatibility

Possible combinations depend on the outdoor unit chosen. Please check the following points.

Indoor Units - Refer to the Indoor Unit Compatibility Table to check if the indoor units selected can be used with the outdoor unit selected.

If the desired combination cannot be found, please change either the indoor or outdoor unit to match one of the combinations shown in the tables. Indoor units not listed in the table cannot be used.

Multi-zone Indoor Unit Connections

	Model Name	Capacity	Wall-mounted	Floor-mounted	EZ FIT® Recessed Ceiling Cassette	Ceiling Cassette	Horizontal- ducted	Multi-postion Air Handler	Ceiling- suspended	intelli-HEAT™
	MXZ-2C20NA3 Up to 2 indoor units	2,000 BTU/H (1-phase)	MSZ-FH06/09/12/15 MSZ-EF09/12/15 MSZ-GL06/09/12/15	MFZ-KJ 09/12/15	MLZ-KP 09/12	SLZ-KF 09/12	SEZ-KD 09/12/15 PEAD A-12	SVZ-KP 12		
	MXZ-3C24NA3 Up to 3 indoor units	24,000 BTU/H (1-phase)	MSZ-FH06/09/12/15/18 MSZ-EF09/12/15/18 MSZ-GL06/09/12/15/18	MFZ-KJ 09/12/15/18	MLZ-KP 09/12/18	SLZ-KF 09/12/15 PLA-A18	SEZ-KD 09/12/15/18 PEAD A-12/18	SVZ-KP 12/18		PAA 18
Heat Pump	MXZ-3C30NA3 Up to 3 indoor units	30,000 BTU/H (1-phase)	MSZ-FH06/09/12/15/18 MSZ-EF09/12/15/18 MSZ- GL06/09/12/15/18/24	MFZ-KJ 09/12/15/18	MLZ-KP 09/12/18	SLZ-KF 09/12/15 PLA-A18	SEZ-KD 09/12/15/18 PEAD A-12/18/24	SVZ-KP 12/18/24	PCA-A 24	PAA 18/24
	MXZ-4C36NA3 Up to 4 indoor units	36,000 BTU/H (1-phase)	MSZ-FH06/09/12/15/18 MSZ-EF09/12/15/18 MSZ- GL06/09/12/15/18/24	MFZ-KJ 09/12/15/18	MLZ-KP 09/12/18	SLZ-KF 09/12/15 PLA-A18	SEZ-KD 09/12/15/18 PEAD A-12/18/24	SVZ-KP 12/18/24	PCA-A 24	PAA 18/24
	MXZ-5C42NA2 Up to 5 indoor units	42,000 BTU/H (1-phase)	MSZ-FH06/09/12/15/18 MSZ-EF09/12/15/18 MSZ- GL06/09/12/15/18/24	MFZ-KJ 09/12/15/18	MLZ-KP 09/12/18	SLZ-KF 09/12/15 PLA-A18	SEZ-KD 09/12/15/18 PEAD A-12/18/24	SVZ-KP 12/18/24	PCA-A 24	PAA 18/24
	MXZ-2C20NAHZ2 Up to 2 indoor units	20,000 BTU/H (1-phase)	MSZ-FH06/09/12/15 MSZ-EF09/12/15 MSZ-GL06/09/12/15	MFZ-KJ 09/12/15	MLZ-KP 09/12	SLZ-KF 09/12	SEZ-KD 09/12/15 PEAD A-12	SVZ-KP 12		
# Hyper-heating	MXZ-3C24NAHZ2 Up to 3 indoor units	24,000 BTU/H (1-phase)	MSZ-FH06/09/12/15/18 MSZ-EF09/12/15/18 MSZ-GL06/09/12/15/18	MFZ-KJ 09/12/15/18	MLZ-KP 09/12/18	SLZ-KF 09/12/15 PLA-A18	SEZ-KD 09/12/15/18 PEAD A-12/18	SVZ-KP 12/18		PAA 18
	MXZ-3C30NAHZ2 Up to 3 indoor units	30,000 BTU/H (1-phase)	MSZ-FH06/09/12/15/18 MSZ-EF09/12/15/18 MSZ- GL06/09/12/15/18/24	MFZ-KJ 09/12/15/18	MLZ-KP 09/12/18	SLZ-KF 09/12/15 PLA-A18	SEZ-KD 09/12/15/18 PEAD A-12/18/24	SVZ-KP 12/18/24	PCA-A 24	PAA 18/24



MXZ-C

Multi-zone Outdoor Unit





Multi-zone Heat Pump

The MXZ-C Model is the perfect solution for sites with limited space. One outdoor unit can handle a range of building layouts and can cool and heat up to eight rooms.

Capacities: 20,000 to 42,000 BTU/H

Sound: As low as 50 dB(A)

SEER2: Up to 20.00 HSPF2: Up to 13.60

COP: Up to 4.20

Handle Up to Five Rooms with a Single Outdoor Unit

The MXZ-C Model offers a seven-system lineup to choose from, ranging between 20,000 and 42,000 BTU/H. All of them are compatible with specific Mand P-Series indoor units. A single outdoor unit can handle a wide range of building layouts.



Optional Drain for All Models

With the MXZ-C Model, one outdoor unit can cool and heat up to eight rooms. They can be installed neatly in sites with limited space, such as

condominium balconies.

MXZ-C Specifications

















INVERTER-driven Multi-zone Heat Pumps

			MXZ-2C20NA4	MXZ-3C24NA4	MXZ-3C30NA4	MXZ-4C36NA4	MXZ-5C42NA4
Cooling Capacity (Nominal)		BTU/H	18,000	22,000	28,400	35,400	40,500
Heating Capacity (Nominal)		BTU/H	22,000	25,000	28,600	36,000	45,000
Guaranteed Operating	Cooling ²	°FDB	115 / 14	115 / 14	115 / 14	115 / 14	115 / 14
Range ¹	Heating ³	°FDB	65 / 5	65 / 5	65 / 5	65 / 5	65 / 5
External Dimensions (H x W x D)	In. [mm]		27-15/16 x 33-1/16 x 13 [710 x 840 x 330]	31-11/32 x 37-13/32 x 13 [796 x 950 x 330]	31-11/32 x 37-13/32 x 13 [796 x 950 x 330]	31-11/32 x 37-13/32 x 13 [796 x 950 x 330]	41-17/64 x 37-13/32 x 13 [1,048 x 950 x 330]
Net Weight		Lbs. [kg]	126 [57]	137 [62]	137 [62]	139 [63]	189 [86]
Electrical Power Requirements	Voltage, Phas	se, Hertz	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Minimum Circuit Ampacity		Α	17.2	22.1	22.1	23.1	32.5
Maximum Overcurrent Prote	ction	Α	20	25	25	25	40
Recommended Fuse Size		Α	20	25	25	25	40
Recommended Minimum Wi	re Size	AWG [mm]	14	14	14	14	14
SCCR		kA	5	5	5	5	5
Refrigerant Piping Diameter	Liquid (High Pressure)	In. [mm]	A,B: 1/4 [A,B: 6.35]	A,B,C: 1/4 [A,B,C: 6.35]	A,B,C: 1/4 [A,B,C: 6.35]	A,B,C,D: 1/4 [A,B,C,D: 6.35]	A,B,C,D,E: 1/4 [A,B,C,D,E: 6.35]
Treingerant i iping blameter	Gas (Low Pressure)	In. [mm]	A,B: 3/8 [A,B: 9.52]	A: 1/2; B,C: 3/8 [A: 12.72; B,C: 9.52]	A: 1/2; B,C: 3/8 [A: 12.72; B,C: 9.52]	A: 1/2; B,C,D: 3/8 [A: 12.72; B,C,D: 9.52]	A: 1/2; B,C,D,E: 3/8 [A: 12.72; B,C,D,E: 9.52]
Max. Total Refrigerant Line L		Ft. [m]	() [()]	() [()]	() [()]	() [()]	() [()]
Max. Refrigerant Line Length (Between ODU & IDU)	1	Ft. [m]	164 () [50 ()]	230 () [70 ()]	230 () [70 ()]	230 () [70 ()]	262 () [80 ()]
	Total Capacity	y	12,000 ()~24,000	12,000 ()~27,000	12,000 ()~36,000	12,000 ()~42,000	12,000 ()~51,000
Indoor Unit Connectable	Indoor Unit	M- and P-Series	2~2 ()	2~3 ()	2~3 ()	2~4 ()	2~5 ()
	Quantity	CITY MULTI	~	~	~	~	~
Sound Pressure Levels		dB(A)	50/54	51/55	52/56	54/56	56/58
Sound Power Levels		dB(A)	54	55	56	56	58
FAN ⁴	Airflow Rate	CFM	1,342/1,458	2,287/2,382	2,287/2,382	2,287/2,382	2,150/2,550
Compressor	Туре		DC INVERTER-driven Twin Rotary	DC INVERTER-driven Twin Rotary	DC INVERTER-driven Twin Rotary	DC INVERTER-driven Twin Rotary	DC INVERTER-driven Twin Rotary
Lubricant			NEO22 // 20.3	FV50S // 23.7	FV50S // 23.7	FV50S // 23.7	FV50S // 37.2
	EER		12.7 // 11.35 // 10.0	13.58 // 12.41 // 11.24	10.6 // 10.12 // 9.65	9.41 // 9.07 // 8.73	9.2 // 9.1 // 9.0
AHRI Ratings	SEER		20.0 // 18.0 // 16.0	20.0 // 18.0 // 16.0	19.0 // 17.6 // 16.2	19.2 // 17.6 // 16.0	19.7 // 17.4 // 15.2
(Ducted // Mixed // Non-	COP		3.93 // 3.78 // 3.64	4.19 // 3.99 // 3.8	3.9 // 3.77 // 3.65	3.5 // 3.37 // 3.25	3.69 // 3.58 // 3.47
ducted)	HSPF		10.0 // 9.65 // 9.3	10.0 // 9.5 // 9.2	10.6 // 10.1 // 9.6	11.0 // 10.4 // 9.8	10.3 // 9.7 // 9.1
	ENERGY ST	AR® Certified	Yes // No // No	Yes // No // No	No // No // No	No // No // No	No // No // No

Conditions

AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB

⁴Heating at 5°F (Indoor // Outdoor)

70 DB, 60 WB // 5 DB, 4 WB

'Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

'A when 1 or more PLA-A-EA7 connected

B Branch box should be placed within the level between the outdoor unit and indoor units

5 F DB - 115°F DB when optional wind baffles are installed

For actual capacity performance based on indoor unit type and number of indoor units connected, please refer to MXZ Operational Performance.

Although the maximum connectable capacity is 130%, the outdoor unit cannot provide more than 100% of the rated capacity. Please utilize this over capacity capability for load shedding or applications where it is known that all connected units will NOT be operating at the same time.

MXZ-NAHZ

Multi-zone Outdoor Heat Pump





Multi-zone Hyper-heating Heat Pump

Connect up to eight different indoor units from the M-Series to just one MXZ outdoor unit to provide optimal heating and air conditioning that meets the requirements of every room.

Capacities: 20,000 to 30,000 BTU/H

Sound: As low as 54 dB(A)

SEER2: Up to 19.00 HSPF2: Up to 13.50

COP: Up to 4.24

ENERGY STAR®: Some systems



Hyper-heating INVERTER®

Standard-rated heating capacity is maintained evenwhen the outside air temperature drops to 5° F. The hyper-heating INVERTER maintains high capacity output even when the outside air temperature is low.



Operates as Low as -13° F Outside air Temperature

This unit features key parts that are resistant key parts resistant to cold of up to -13° F after rigorous selection. The printed circuit board is coated on both sides to protect it in harsh environments.

MXZ-NAHZ Specifications

Hyper-heating Multi-zone Heat Pumps

			MXZ-2C20NAHZ4	MXZ-3C24NAHZ4	MXZ-3C30NAHZ4
Cooling Capacity (Nominal)		BTU/H	18,000	22,000	28,400
Heating Capacity (Nominal)		BTU/H	22,000	25,000	28,600
Guaranteed Operating	Cooling ²	°FDB	115 / 14	115 / 14	115 / 14
Range ¹	Heating ³	°FDB	65 / -13	65 / -13	65 / -13
External Dimensions (H x W x D)	In. [mm]		41-17/64 x 37-13/32 x 13 [1,048 x 950 x 330]	41-17/64 x 37-13/32 x 13 [1,048 x 950 x 330]	41-17/64 x 37-13/32 x 13 [1,048 x 950 x 330]
Net Weight		Lbs. [kg]	187 [85]	189 [86]	189 [86]
Electrical Power Requirements Voltage, Pha		se, Hertz	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60
Minimum Circuit Ampacity		Α	29.5	30.5	30.5
Maximum Overcurrent Prote	ction	A	40	40	40
Recommended Fuse Size		A	40	40	40
Recommended Minimum Wi	re Size	AWG [mm]	14	14	14
SCCR		kA	5	5	5
Refrigerant Piping Diameter	Liquid (High Pressure)	In. [mm]	A,B: 1/4 [A,B: 6.35]	A,B,C: 1/4 [A,B,C: 6.35]	A,B,C: 1/4 [A,B,C: 6.35]
Reingerant i ping Diameter	Gas (Low Pressure)	In. [mm]	A,B: 3/8 [A,B: 9.52]	A: 1/2; B,C: 3/8 [A: 12.72; B,C: 9.52]	A: 1/2; B,C: 3/8 [A: 12.72; B,C: 9.52]
Max. Total Refrigerant Line L		Ft. [m]	(0] ()	[()]()	[()]()
Max. Refrigerant Line Length (Between ODU & IDU)	1	Ft. [m]	164 () [50 ()]	230 () [70 ()]	230 () [70 ()]
	Total Capacity	/	12,000 ()~24,000	12,000 ()~27,000	12,000 ()~36,000
ndoor Unit Connectable	Indoor Unit	M- and P-Series	2~2 ()	2~3 ()	2~3 ()
	Quantity	CITY MULTI	~	~	~
Sound Pressure Levels		dB(A)	54/58	54/58	54/58
Sound Power Levels		dB(A)	58	58	58
FAN ⁴	Airflow Rate	CFM	2,150/2,550	2,150/2,550	2,224/2,550
Compressor	Туре		DC INVERTER-driven Twin Rotary	DC INVERTER-driven Twin Rotary	DC INVERTER-driven Twin Rotary
ubricant			FV50S // 37.2	FV50S // 37.2	FV50S // 37.2
	EER		14.3 // 12.2 // 11.0	13.5 // 11.7 // 10.0	12.5 // 11.4 // 10.3
AHRI Ratings	SEER		17.1 // 16.0 // 15.0	19.0 // 17.2 // 15.5	18.0 // 17.0 // 16.0
Ducted // Mixed // Non-	COP		4.37 // 3.84 // 3.69	4.25 // 4.02 // 3.8	4.0 // 3.85 // 3.7
ducted)	HSPF		10.0 // 9.6 // 9.5	10.0 // 9.5 // 9.0	11.0 // 10.4 // 9.8
	ENERGY STA	AR® Certified	Yes // No // No	Yes // No // No	Yes // No // No

NOTES: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) °F ²Heating at 47°F (Indoor // Outdoor) °F ³Heating at 17°F (Indoor // Outdoor) °F

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB

⁴Heating at 5°F (Indoor // Outdoor)

°F 70 DB, 60 WB // 5 DB, 4 WB

For actual capacity performance based on indoor unit type and number of indoor units connected, please refer to MXZ Operational Performance.

Although the maximum connectable capacity is 130%, the outdoor unit cannot provide more than 100% of the rated capacity. Please utilize this over capacity capability for load shedding or applications where it is known that all connected units will NOT be operating at the same time.

^{&#}x27;Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

'A when 1 or more PLA-A-EA7 connected

'B Branch box should be placed within the level between the outdoor unit and indoor units

'5 FF DB - 115 FF DB when optional wind baffles are installed

M-Series Indoor/Outdoor Unit Compatibility

		Outdoor Unit	MXZ-2C20NA2	MXZ-3C24NA2	MXZ-3C30NA2	MXZ-4C36NA2	MXZ-5C42NA2
		Indoor Unit					
		MSZ-FH06NA	•	•	•	•	•
		MSZ-FH09NA	•	•	•	•	•
		MSZ-FH12NA	•	•	•	•	•
		MSZ-FH15NA	•	•	•	•	•
		MSZ-FH18NA2		•	•	•	•
		MSZ-GL06NA	•	•	•	•	•
		MSZ-GL09NA	•	•	•	•	•
	Wall-mounted	MSZ-GL12NA	•	•	•	•	•
		MSZ-GL15NA	•	•	•	•	•
		MSZ-GL18NA		•	•	•	•
		MSZ-GL24NA			•	•	•
		MSZ-EF09NAW(S)(B)	•	•	•	•	•
		MSZ-EF12NAW(S)(B)	•	•	•	•	•
		MSZ-EF15NAW(S)(B)	•	•	•	•	•
		MSZ-EF18NAW(S)(B)		•	•	•	•
		MFZ-KJ09NA	•	•	•	•	•
M-Series	-1	MFZ-KJ12NA	•	•	•	•	•
MI-261162	Floor-mounted	MFZ-KJ15NA	•	•	•	•	•
		MFZ-KJ18NA		•	•	•	•
	EZ FIT®	MLZ-KY06NA	•	•	•	•	•
	Recessed	MLZ-KP09NA	•	•	•	•	•
	Ceiling	MLZ-KP12NA	•	•	•	•	•
	Cassette	MLZ-KP18NA		•	•	•	•
		SVZ-KP12NA	•*2	•*2	•*2	•*2	•*2
		SVZ-KP18NA		•*2	•*2	•*2	•*2
	Multi-position Air Handler	SVZ-KP24NA			•*2	•*2	•*2
	Air nandier	SVZ-KP30NA					
		SVZ-KP36NA					
		SLZ-KF09NA	•	•	•	•	•
	Four-way	SLZ-KF12NA	•	•	•	•	•
	Ceiling Cassette	SLZ-KF15NA		•	•	•	•
		SEZ-KD09NA4	•	•	•	•	•
	Horizontal-	SEZ-KD12NA4	•	•	•	•	•
	ducted	SEZ-KD15NA4	•	•	•	•	•
		SEZ-KD18NA4		•	•	•	•

Information is current as of this printing. Minimum installed capacity cannot be less than 12,000 BTU/H. A minimum of two indoor units must be connected to all

MXZ-C outdoor units.

^{*2} Only one SVZ Model can be connected.

^{*3} Maximum of two units can be connected unless the SPTB1 is utilized to power the indoor unit.

^{*4} Single unit can be connected.

^{*5} When the system includes even 1 unit of PLA-A-EA7, the number of the maximum connectable indoor units is decreased as follows: 3 for MXZ-4C36NAHZ, 4 for MXZ-5C42NAHZ, and 6 for MXZ-8C48NA(HZ) and MXZ-8C60NA.

^{*6} Maximum of 3 horizontal ducted indoor units (PEAD or SEZ) can be connected.
*7 Maximum of 2 horizontal ducted indoor units (PEAD or SEZ) can be connected. For more information, please refer to the Service Manual, Application Note 1039 and the full compatibility chart on MyLinkDrive.com.

P-Series Indoor/Outdoor Unit Compatibility

		Outdoor Unit	MXZ-2C20NAHZ2	MXZ-3C24NAHZ2	MXZ-3C30NAHZ2	MXZ-4C36NAHZ2	MXZ-5C42NA2
		Indoor Unit					
		PLA-A12EA7				● *5	
		PLA-A18EA7		•	•	◆*5	
	Four-way	PLA-A24EA7				•*5	
	Ceiling Cassette	PLA-A30EA7				•*5	
		PLA-A36EA7				● *5	
		PLA-A42EA7					
		PCA-A24KA7			•		
	Ceiling-	PCA-A30KA7					
	suspended	PCA-A36KA7					
		PCA-A42KA7					
		PEAD-A12AA7	● *3	•*3	◆*3	•*6	
		PEAD-A18AA7		•	◆*3	•*6	
P-Series	Horizontal-	PEAD-A24AA7			•	•*6	
	ducted	PEAD-A30AA7				•*6	
		PEAD-A36AA7				•*6	
		PEAD-A42AA7					
		PAA-A18AA1		•	•	•	•
		PAA-A18BA1		•	•	•	•
		PAA-A24AA1			•		
		PAA-A24BA1			•		
	intelli UEATIM	PAA-A30AA1					
	intelli-HEAT™	PAA-A30BA1					
		PAA-A36BA1					
		PAA-A36CA1					
		PAA-A42BA1					
		PAA-A42CA1					

Information is current as of this printing. Minimum installed capacity cannot be less than 12,000 Btu/h. A minimum of two indoor units must be connected to all

MXZ-C outdoor units.

^{*2} Only one SVZ Model can be connected.


^{*3} Maximum of two units can be connected unless the SPTB1 is utilized to power the indoor unit.

^{*4} Single unit can be connected.

^{*5} When the system includes even 1 unit of PLA-A·EA7, the number of the maximum connectable indoor units is decreased as follows: 3 for MXZ-4C36NAHZ, 4 for MXZ-5C42NAHZ, and 6 for MXZ-8C48NA(HZ) and MXZ-8C60NA.

^{*6} Maximum of 3 horizontal ducted indoor units (PEAD or SEZ) can be connected.

^{*7} Maximum of 2 horizontal ducted indoor units (PEAD or SEZ) can be connected. For more information, please refer to the service manual, application 1039 and the full compatibility chart on mylinkdrive.

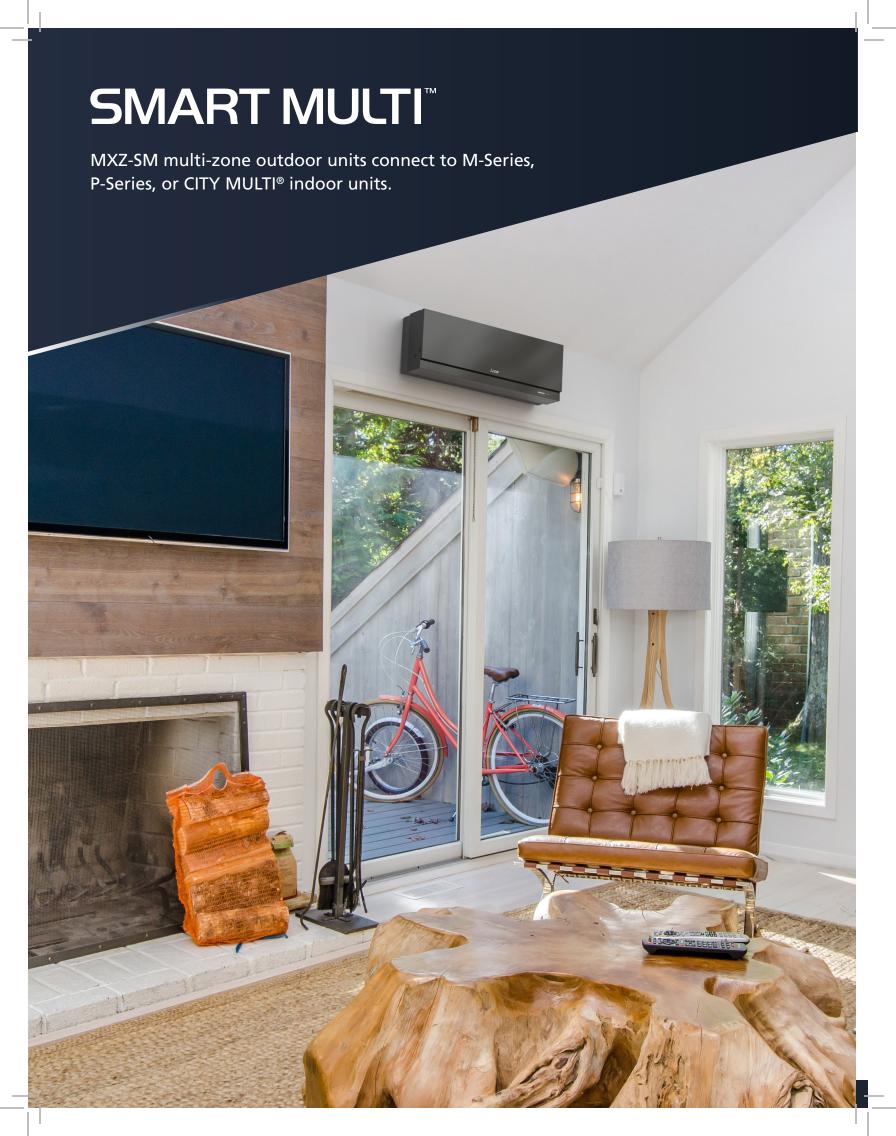

Multi-Zone Product Range

Indoor Units



Wall-mounted



Wall-mounted



SVZ Multi-position Air Handler



EZ FIT® Recessed **Ceiling Cassette**



SLZ Model Ceiling Cassette



PLA Model Ceiling Cassette



PCA **Ceiling Suspended**



MFZ-KJ Floor-mounted



PEAD Horizontal-ducted



intelli-HEAT™ **Cased Coil**

Outdoor Units

Heat Pumps



MXZ-SM36NAM-U1 4-port Connection

Branch Box Required*



MXZ-SM48NAM-U1 8-port Connection



MXZ-SM60NAM-U1 8-port Connection

Branch Box Required*

Branch Box Required*

Hyper-heating INVERTER® Heat Pumps



MXZ-SM36NAMHZ-U1 **4-port Connection**

MXZ-SM42NAMHZ-U1 **5-port Connection**



MXZ-SM48NAMHZ-U1 **8-port Connection**

Connects up to 4 Indoor Units Connects up to 5 Indoor Units

Connects up to 8 Indoor Units

Branch Box Required*

Verify System Compatibility

Possible combinations depends on the outdoor unit chosen. Please check the following points.


Indoor Units - Refer to the Indoor Unit Compatibility Table to check if the indoor units selected can be used with the outdoor unit selected.

If the desired combination cannot be found, please change either the indoor or outdoor unit to match one of the combinations shown in the tables. Indoor units not listed in the table cannot be used.

SMART MULTI™ Indoor Unit Connections

	Model	6,000 BTU/H	9,000 BTU/H	12,000 BTU/H	15,000 BTU/H	18,000 BTU/H	24,000 BTU/H	30,000 BTU/H	36,000 BTU/H
	MSZ-FS Model	•	•	•	•	•			
Wall-mounted	MSZ-EF Model		•	•					
	MSZ-GL/GS Model	•	•	•	•	•	•		
EZ FIT® Recessed Ceiling Cassette	MLZ Model	•	•	•		•			
assette	PLA Model			•		•	•	•	•
Ceiling Cassette	SLZ-KF Model		•	•	•				
Floor-mounted	MFZ-KJ Model		•	•	•	•			
Horizontal-ducted	SEZ Model		•	•	•	•			
Horizor	PEAD Model		•	•	•	•	•	•	•
Multi-position Air Handler	SVZ Model			•		•	•	•	•
intelli-AIR™	PAA Cased Coil						•	•	•

MXZ-SM Multi-zone Outdoor Heat Pumps

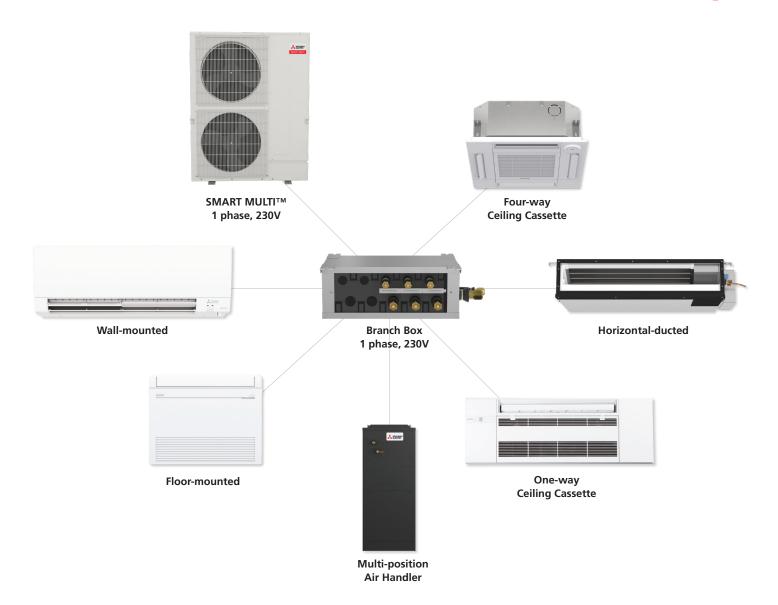

Branch Box

	Туре			Branc	h Box
	Model Nam	e		PAC-MKA32BC	PAC-MKA52BC
Conr	nectible Number of	Indoor Unit	:s	Maximum 3	Maximum 5
	Power Supp	ly		1-phase, 60Hz, 208/230V	1-phase, 60Hz, 208/230V
Input kW			kW	0.003	0.003
Running Current A				0.05	0.05
		W	In.[mm]	17-23/32 [450]	17-23/32 [450]
Dime	ensions	D	In.[mm]	11-1/32 [280]	11-1/32 [280]
		Н	In.[mm]	6-11/16 [170]	6-11/16 [170]
	Weight		lbs [kg]	15 [6.7]	16 [7.4]
Piping	Branch (Indoor Side)*	Gas	In.[mm]	3/8 [9.52] × 3	3/8 [9.52] × 4 1/2 [12.7] × 1
Connection	(illuoor side)	Liquid	In.[mm]	1/4 [6.35] × 3	1/4 [6.35] × 3
(Flare)	Main	Gas	In.[mm]	5/8 [15.88]	5/8 [15.88]
	(Oudoor Side)*	Liquid	In.[mm]	3/8 [9.52]	3/8 [9.52]

NOTE: The piping connection size differs according to the type and capacity of indoor units. Match the piping connection size for indoor and branch box. If the piping connection size of branch box does not match the piping connection size of indoor units, use optional different-diameter (deformed) joints to the branch box side. (Connect deformed joint directly to the branch box side.)

MXZ-SM Specifications

Heat Pump

M	XZ-SM		MXZ-SM36NAM	MXZ-SM48NAM	MXZ-SM60NAM	
Cooling Capacity (Nominal)		BTU/H	36,000	48,000	60,000	
Heating Capacity (Nominal)		BTU/H	42,000	54,000	66,000	
Currentered Onesetien Bennet	Cooling ²	°FDB	115 / 5	115 / 5	115 / 5	
Guaranteed Operating Range ¹	Heating ³	°FDB	59 / -13	59 / -13	59 / -13	
External Dimensions (H x W x D)	In. [mm]		52-11/16 x 41-11/32 x 13 [1,338 x 1,050 x 330]	52-11/16 x 41-11/32 x 13 [1,338 x 1,050 x 330]	52-11/16 x 41-11/32 x 13 [1,338 x 1,050 x 330]	
Net Weight		Lbs. [kg]	271 [123]	271 [123]	302 [137]	
lectrical Power Requirements Voltage, Phase, F		se, Hertz	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	
Minimum Circuit Ampacity		A	29 (35.0)	29 (35.0)	36 (46.0)	
Maximum Overcurrent Protection		A	40 (50)	40 (50)	50 (55)	
Recommended Fuse Size		A	30 (40)	30 (40)	40 (50)	
Recommended Minimum Wire Size		AWG [mm]	8 [8.4]	8 [8.4]	6 [13.3]	
SCCR		kA	5	5	5	
Refrigerant Piping Diameter	Liquid (High Pressure)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	
	Gas (Low Pressure)	In. [mm]	5/8 [15.88]	5/8 [15.88]	3/4 [19.05]	
Max. Total Refrigerant Line Length		Ft. [m]	311 (984) [95 (300)]	311 (984) [95 (300)]	311 (492) [95 (150)]	
Max. Refrigerant Line Length (Between ODU & IDU)		Ft. [m]	492 (492) [150 (150)]	492 (492) [150 (150)]	492 (262) [150 (80)]	
	Total Capacit	ty	12,000 (18,000)~46,800	12,000 (24,000)~62,000	12,000 (30,000)~78,000	
Indoor Unit Connectable	Indoor	M- and P-Series	2~4 (3)	2~8 (6)	2~8 (6)	
	Unit Quantity	CITY MULTI	1~11	1~12	1~12	
Sound Pressure Levels		dB(A)	49/53	51/54	58/59	
Sound Power Levels		dB(A)	53	54	59	
FAN⁴	Fan Motor Output	kW	0.074+0.074	0.074+0.074	0.2+0.2	
	Airflow Rate	CFM	3,885/3,885	3,885/3,885	4,875/4,555	
Compressor	Туре		Hermetic	Hermetic	Hermetic	
Compressor Motor Output		kW	2.8	3.4	3.9	
Lubricant			FV50S // 78	FV50S // 78	FVC68D // 78	
EER			15.0 // 13.8 // 12.6	13.1 // 12.2 // 11.3	13.3 // 12.2 // 11.1	
AHRI Ratings	SEER		23.0 // 20.65 // 18.3	23.0 // 19.75 // 16.5	20.0 // 18.9 // 17.8	
Ducted // Mixed // Non-ducted)	COP		4.0 // 3.85 // 3.7	4.0 // 3.65 // 3.3	4.1 // 3.9 // 3.7	
,	HSPF		12.5 // 11.8 // 11.2	12.0 // 11.5 // 11.0	12.0 // 11.3 // 10.7	
	ENERGY STA	R® Certified	Yes // No // Yes	Yes // No // No	Yes // No // No	

NOTES: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB

Conditions ⁴Heating at 5°F (Indoor // Outdoor) 70 DB, 60 WB // 5 DB, 4 WB

For actual capacity performance based on indoor unit type and number of indoor units connected, please refer to MXZ Operational Performance.

Although the maximum connectable capacity is 130%, the outdoor unit cannot provide more than 100% of the rated capacity. Please utilize this over capacity capability for load shedding or applications where it is known that all connected units will NOT be operating at the same time.

^{*}Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

*A when 1 or more PLA-A-EA7 connected

*B Branch box should be placed within the level between the outdoor unit and indoor units

*C 5°F DB - 115°F DB when optional wind baffles are installed

MXZ-SM Specifications

Hyper-heating Heat Pumps

M	XZ-SM		MXZ-SM36NAMHZ	MXZ-SM42NAMHZ	MXZ-SM48NAMHZ	
Cooling Capacity (Nominal)		BTU/H	36,000	42,000	48,000	
Heating Capacity (Nominal)		BTU/H	42,000	48,000	54,000	
Currentered Onesetien Dennel	Cooling ²	°FDB	115 / 5	115 / 5	115 / 5	
Guaranteed Operating Range ¹	Heating ³	°FDB	59 / -13	59 / -13	59 / -13	
External Dimensions (H x W x D)	In. [mm]		52-11/16 x 41-11/32 x 13 [1,338 x 1,050 x 330]	52-11/16 x 41-11/32 x 13 [1,338 x 1,050 x 330]	52-11/16 x 41-11/32 x 13 [1,338 x 1,050 x 330]	
Net Weight		Lbs. [kg]	278 [126]	278 [126]	278 [126]	
lectrical Power Requirements Voltage, Phase, I		se, Hertz	208/230, 1, 60	208/230, 1, 60	208/230, 1, 60	
Minimum Circuit Ampacity		A	36 (42.0)	36 (42.0)	36 (42.0)	
Maximum Overcurrent Protection		A	40 (50)	40 (50)	40 (50)	
Recommended Fuse Size		A	40 (45)	40 (45)	40 (45)	
Recommended Minimum Wire Size		AWG [mm]	6 [13.3]	6 [13.3]	6 [13.3]	
SCCR		kA	5	5	5	
Refrigerant Piping Diameter	Liquid (High Pressure)	In. [mm]	3/8 [9.52]	3/8 [9.52]	3/8 [9.52]	
	Gas (Low Pressure)	In. [mm]	5/8 [15.88]	5/8 [15.88]	5/8 [15.88]	
Max. Total Refrigerant Line Length		Ft. [m]	311 (984) [95 (300)]	311 (984) [95 (300)]	311 (984) [95 (300)]	
Max. Refrigerant Line Length Between ODU & IDU)		Ft. [m]	492 (492) [150 (150)]	492 (492) [150 (150)]	492 (492) [150 (150)]	
	Total Capacit	у	12,000 (18,000)~46,800	12,000 (21,000)~54,000	12,000 (24,000)~62,000	
ndoor Unit Connectable	Indoor	M- and P-Series	2~4 (3)	2~5 (4)	2~8 (6)	
	Unit Quantity	CITY MULTI	1~11	1~12	1~12	
ound Pressure Levels		dB(A)	49/53	50/54	51/54	
Sound Power Levels		dB(A)	53	54	54	
FAN⁴	Fan Motor Output	kW	0.074+0.074	0.074+0.074	0.074+0.074	
AIN	Airflow Rate	CFM	3,885/3,885	3,885/3,885	3,885/3,885	
Compressor	Туре		Hermetic	Hermetic	Hermetic	
Compressor Motor Output		kW	2.8	2.9	3.4	
ubricant			FV50S // 73	FV50S // 73	FV50S // 73	
EER			15.0 // 13.8 // 12.6	13.4 // 12.2 // 11.0	13.1 // 12.2 // 11.3	
UDI Datings	SEER		23.0 // 20.65 // 18.3	22.0 // 20.0 // 18.0	23.0 // 19.75 // 16.5	
AHRI Ratings Ducted // Mixed // Non-ducted)	COP		4.0 // 3.85 // 3.7	4.1 // 3.75 // 3.4	4.0 // 3.65 // 3.3	
Dacted // Hillinea // Horr ducted/	HSPF		12.5 // 12.1 // 11.7	12.0 // 11.5 // 11.0	12.0 // 11.5 // 11.0	
	ENERGY STA	R® Certified	Yes // No // Yes	Yes // No // No	Yes // No // No	

NOTES: AHRI Rated Conditions (Rated data is determined at a fixed compressor speed)

¹Cooling (Indoor // Outdoor) ²Heating at 47°F (Indoor // Outdoor) ³Heating at 17°F (Indoor // Outdoor)

⁴Heating at 5°F (Indoor // Outdoor)

80 DB, 67 WB // 95 DB, 75 WB 70 DB, 60 WB // 47 DB, 43 WB 70 DB, 60 WB // 17 DB, 15 WB

Conditions 70 DB, 60 WB // 5 DB, 4 WB

*Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.


*A when 1 or more PLA-A-EA7 connected

*B Branch box should be placed within the level between the outdoor unit and indoor units

*C 5PF DB - 115PF DB when optional wind baffles are installed

For actual capacity performance based on indoor unit type and number of indoor units connected, please refer to MXZ Operational Performance.

Although the maximum connectable capacity is 130%, the outdoor unit cannot provide more than 100% of the rated capacity. Please utilize this over capacity capability for load shedding or applications where it is known that all connected units will NOT be operating at the same time.

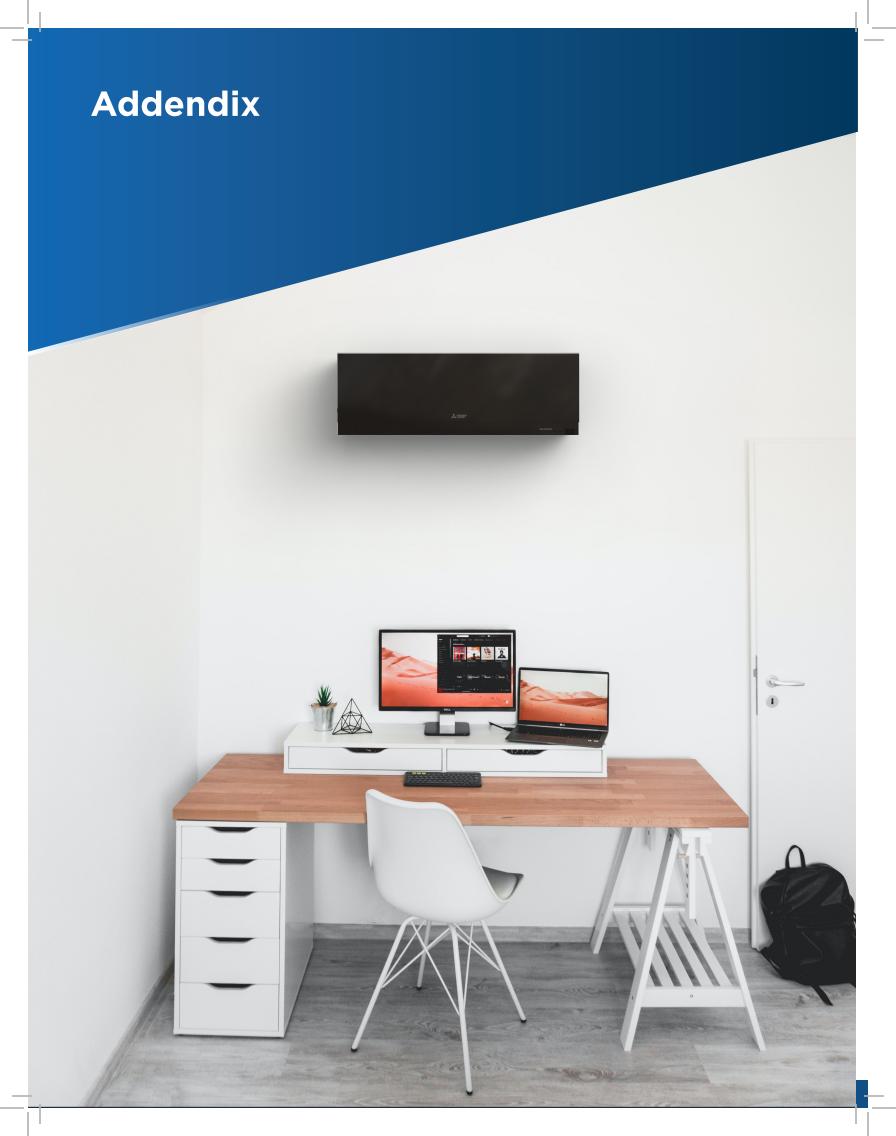

Piping Installation

M-Series

Single Type

	Outdoor Unit	Maximum Piping Length (ft)	Maximum Height Difference (ft)	Maximum Number of Bends
Series	Class	Total Length (A)	Outdoor Unit - Indoor Unit (H)	Total Number
MUZ FC	06/09/12	65	40	10
MUZ-FS	15/18	100	50	10
MUZ/Y-GS	09/12/15	65	40	10
WI02/1-G3	18/24	100	50	10
MUZ-HM	09/12/15/18	65	40	10
WOZ-NW	24	100	50	10
MUFZ-KJ	09/12	65	40	10
WUFZ-KJ	15/18	100	50	10
MUZ-WR	09/12/18	65	40	10
IVIOZ-VVK	24	100	50	10
	09/12/15	65	40	10
SUZ-KA-NA2/NAHZ	18	100	50	10
	24/30/36	100	100	10

P-Series


Single Type

Series	Outdoor Unit	Maximum Piping Length (ft)	Maximum Height Difference (ft)	Maximum Number of Bends
Series	Class	Total Length (A)	Outdoor Unit - Indoor Unit (H)	Total Number
PUY	12/18	165	100	15
PUT	24/30/36/42	225	100	15
DUZ	12/18	100	100	15
PUZ	24/30/36/42	165	100	15
PUZ-HA	24	165	100	15
PUZ-HA	30/36/42	245	100	15

Additional M-Series Information

Port Adapters Parts Numbers

Model	Diameter A	Diameter B
MAC-A454JP-E	3/8"	1/2"
MAC-A455JP-E	1/2"	3/8"
MAC-A456JP-E	1/2"	5/8"
PAC-5G76RJ-E	3/8"	5/8"
ADP5834	5/8"	3/4"
PAC-493PI	1/4"	3/8"

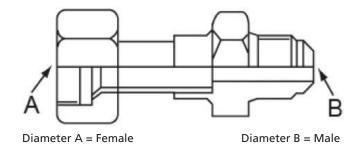

Multi-zone Efficiency Ratings

Model	Configuration	SEER2	EER2	HSPF2
	Ducted	16.00	10.00	9.10
MXZ-2C20NA4	Mixed	18.00	11.35	10.50
	Non-ducted	20.00	12.70	12.00
	Ducted	16.00	11.20	8.60
MXZ-3C24NA4	Mixed	18.00	12.40	9.30
	Non-ducted	20.00	13.60	10.00
	Ducted	16.20	9.60	8.80
MXZ-3C30NA4	Mixed	17.60	10.10	9.40
	Non-ducted	19.00	10.60	10.00
	Ducted	16.00	8.70	9.50
MXZ-4C36NA4	Mixed	17.60	9.05	9.65
	Non-ducted	19.20	9.40	9.80
	Ducted	15.20	9.00	9.00
MXZ-5C42NA4	Mixed	17.45	9.10	9.10
	Non-ducted	19.70	9.20	9.20
	Ducted	16.00	11.00	8.70
MXZ-2C20NAHZ4	Mixed	16.50	12.25	9.35
	Non-ducted	17.00	13.50	10.00
	Ducted	15.50	10.00	8.50
MXZ3C24NAHZ4	Mixed	17.25	11.75	9.25
	Non-ducted	19.00	13.50	10.00
	Ducted	16.00	10.30	8.50
MXZ-3C30NAHZ4	Mixed	17.00	11.40	9.25
	Non-ducted	18.00	12.50	10.00

M-Series Air Outlet Coverage Range*


Model	Mode	Function	Airflow (CFM)	Coverage (FT)
MSZ-FS06NA, MSZ-FS09NA	Heat	Dry	437	29.8
	Cool	Wet	328	22.5
MSZ-FS12NA	Heat	Dry	454	31.0
	Cool	Wet	364	24.8
MSZ-FS15NA	Heat	Dry	514	34.9
	Cool	Wet	376	25.6
MSZ-FS18NA	Heat	Dry	514	34.9
11152 13 10101	Cool	Wet	376	25.6
-GS06NA, MSZ/Y-GS09NA, MSZ/Y-GS12NA	Heat	Dry	406	29.5
4300NA, M32/1 4303NA, M32/1 4312NA	Cool	Wet	286	21.0
MSZ/Y-GS15NA	Heat	Dry	463	33.5
MSZ/1-GS ISNA	Cool	Wet	385	28.0
MSZ/Y-GS18NA	Heat	Dry	646	44.0
WI32/ 1-03 TOWA	Cool	Wet	581	39.7
MSZ/Y-GS24NA	Heat	Dry	738	36.9
W32/ 1-G324NA	Cool	Wet	661	33.2
MCZ/V CCZONIA MCZ/V CCZCNIA	Heat	Dry	848	45.0
MSZ/Y-GS30NA, MSZ/Y-GS36NA	Cool	Wet	763	40.7
BAET MIOONIA BAET MIAONIA	Heat	Dry	417	29.6
MFZ-KJ09NA, MFZ-KJ12NA	Cool	Wet	354	25.3
MEZ MIAENA	Heat	Dry	470	33.3
MFZ-KJ15NA	Cool	Wet	366	26.2
APP V. CO.	Heat	Dry	470	33.3
MFZ-KJ18NA	Cool	Wet	417	29.7
	Heat	Dry	300	15.1
SLZ-KF09NA	Cool	Wet	270	13.7
	Heat	Dry	336	16.9
SLZ-KF12NA	Cool	Wet	302	15.2
	Heat	Dry	405	20.3
SLZ-KF15NA	Cool	Wet	365	18.3
	Heat	Dry	475	23.7
SLZ-KF18NA	Cool	Wet	429	21.4
	Heat	Dry	420	29.2
MSZ-EF09NA(B/S/W)	Cool	Wet	319	22.3
	Heat	Dry	448	31.1
MSZ-EF12NA(B/S/W)	Cool	Wet	319	22.3
	Heat	Dry	448	31.1
MSZ-EF15NA(B/S/W)	Cool	Wet	313	21.9
	Heat	Dry	466	32.3
MSZ-EF18NA(B/S/W)	Cool	Wet	334	23.4
	Heat		406	29.5
MSZ-HM09NA, MSZ-HM12NA		Dry Wet	286	21.0
	Cool Heat	Dry	463	33.5
MSZ-HM15NA	Cool	-	385	28.0
		Wet		
MSZ-HM18NA	Heat	Dry	625	42.6
	Cool	Wet	562	38.4
MSZ-HM24NA	Heat	Dry	702	47.7
	Cool	Wet	632	43.1
MSZ-JP09WA	Heat	Dry	406	29.5
	Cool	Wet	364	26.5
MSZ-JP12WA	Heat	Dry	406	29.5
	Cool	Wet	364	26.5
MSZ-WR09NA	Heat	Dry	406	29.5
	Cool	Wet	286	21.0
MSZ-WR12NA	Heat	Dry	406	29.5
	Cool	Wet	286	21.0
MSZ-WR18NA	Heat	Dry	625	42.6
MOL PATIONA	Cool	Wet	562	38.4
MSZ-WR24NA	Heat	Dry	702	47.7
WIJE-VANZAWA	Cool	Wet	632	43.1
MI 7 PDOONA	Heat	Dry	311	20.7
MLZ-KP09NA	Cool	Wet	325	21.7
MIT VD43NA	Heat	Dry	332	22.1
MLZ-KP12NA	Cool	Wet	350	23.3
M 7 //	Heat	Dry	403	26.7
MLZ-KP18NA	Cool	Wet	417	27.6

MXZ-C Piping Lengths

MXZ-2C20NA3

Maximum Piping Length (ft)		
Outdoor Unit - Indoor Unit (a,b)	82	
Total Length (a+b)	164	


Maximum Number of Bends		
Outdoor Unit - Indoor Unit (a,b)	25	
Total Length (a+b)	50	



MXZ-2C20NAHZ2

Maximum Piping Length (ft)		
Outdoor Unit - Indoor Unit (a,b)	82	
Total Length (a+b)	164	


Maximum Number of Bends		
Outdoor Unit - Indoor Unit (a,b)	25	
Total Length (a+b)	50	



MXZ-3C24NA3, MXZ-3C24NA3, MXZ-3C30NA2, MXZ-3C24NAHZ2, MXZ-3C30NAHZ2

Maximum Piping Length (ft)		
Outdoor Unit - Indoor Unit (a,b)	82	
Total Length (a+b)	230	


Maximum Number of Bends		
Outdoor Unit - Indoor Unit (a,b)	25	
Total Length (a+b)	70	



MXZ-4C36NA3

Maximum Piping Length (ft)		
Outdoor Unit - Indoor Unit (a,b)	82	
Total Length (a+b)	230	


Maximum Number of Bends		
Outdoor Unit - Indoor Unit (a,b)	25	
Total Length (a+b)	70	



MXZ-5C42NA3

Maximum Piping Length (ft)		
Outdoor Unit - Indoor Unit (a,b) 82		
Total Length (a+b)	262	


Maximum Number of Bends		
Outdoor Unit - Indoor Unit (a,b)	25	
Total Length (a+b)	80	





MXZ-SM Piping Lengths

MXZ-SM36NAMZ-U1, MXZ-SM42NAMZ-U1, MXZ-SM48NAMZ-U1, MXZ-SM48NAM-U1, MXZ-SM60NAM-U1



	Total Piping Length	$c1 + b1 + b2 + a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 \le 150 \text{ m} (492 \text{ ft.})$
	Farthest piping length (L) *1	c1 + b2 + a8 ≤ 80 m (262 ft.)
Permissible Length	Piping length between outdoor unit and branch boxes	c1 + b1 + b2 ≤ 55 m (180 ft.)
(One-way) Farthest branch box from the first joint (b2)		b2 ≤ 30 m (98 ft.)
	Farthest piping length after branch box (l)	a8 ≤ 25 m (82 ft.)
	Total piping length between branch boxes and indoor units	$a1 + a2 + a3 + a4 + a5 + a6 + a7 + a8 \le 95 \text{ m}$ (311 ft.)
	In indoor/outdoor section (H) *2	$H \le 50$ m (164 ft.) (In case of outdoor unit is set higher than indoor unit)
Permissible Height In branch box/indoor unit section (h1) Difference		$H \le 40 \text{ m}$ (131 ft.) (In case of outdoor unit is set lower than indoor unit)
(One-way)	In each branch unit (h2)	h1 + h2 ≤ 15 m (49 ft.)
	In each indoor unit (h3)	h2 ≤ 15 m (49 ft.)
		h3 ≤ 12 m (39 ft.)
Number of Bends		$\begin{array}{c} \mid c1+b1+a1\mid,\mid c1+b1+a2\mid,\mid c1+b1+a3\mid,\mid c1+b1+a4\mid,\mid c1+b1+a5\mid,\\ \mid c1+b2+a6\mid,\mid c1+b2+a7\mid,\mid c1+b2+a8\mid\leq 15 \end{array}$

^{*1} The piping specification table does not provide a minimum line set length. However, indoor units with connected piping length less than 16 ft. (5m) could produce intermittent noise during normal system operation in very quiet environments. Please be aware of this important information when installing and locating the indoor unit within the conditioned space.

Conditions for Specifications

Cooling	Indoor	D.B. 80° F (27° C), W.B. 67° F (19° C)
	Outdoor	D.B. 95° F (35° C), W.B. 75° F (24° C)
Hanting	Indoor	D.B. 70° F (21° C), W.B. 60° F (16° C)
Heating	Outdoor	D.B. 17° F (-8° C), W.B. 15° F (-9° C)

Temperature conditions are based on AHRI 210/240.

Refrigerant piping length: 16ft. The figures for total input are based on the following voltages.

Series	Indoor Unit	Outdoor Unit
M-Series P-Series MXZ-SM		208/230 V Single phase 60Hz

The sound pressure measurement is conducted in an anechoic chamber. The actual sound level depends on the distance from the unit and the acoustic environment.

^{*2} Branch box should be placed within the level between the outdoor unit and indoor units.

Terminology Explained

Maximum Piping Length

This is the maximum allowable length of the refrigerant piping. The amount of refrigerant pipe used cannot be longer than the length specified.

Total Length

The maximum allowable combined length of all the refrigerant piping between the outdoor unit and indoor unit(s).

Outdoor Unit - Indoor Unit

The maximum allowable length of the refrigerant piping between the outdoor unit and indoor units installed when multiple units are connected to a single outdoor unit. This distance limitation refers to the maximum length between the outdoor unit and the farthest indoor unit.

Pipe Length Difference From Distribution Pipe

The maximum allowable difference in refrigerant piping length from the distribution pipe to the farthest indoor unit and from the distribution pipe to the closest indoor unit when multiple indoor units are connected to a single outdoor unit using a distribution pipe.

Indoor Unit - Distribution Pipe

The maximum allowable length of the refrigerant piping between indoor units and the distribution pipe when multiple indoor units are connected to a single outdoor unit.

Maximum Height Difference

This is the maximum allowable height difference. It is necessary to install the air conditioning system so that the height distance is no more than the difference specified. (Specified differences may vary if the outdoor unit is installed higher or lower than the indoor units).

Outdoor Unit - Indoor Unit

The maximum allowable difference in height between the outdoor unit and indoor units when installed (when multiple indoor units are connected to a single outdoor unit, this distance limitation refers to the maximum height difference between the outdoor unit and an indoor unit).

Indoor Unit - Indoor Unit

The maximum allowable difference between the heights of indoor units when multiple indoor units are connected to a single outdoor unit.

Maximum Number Of Bends

This is the maximum allowable number of bends in the refrigerant piping. The total number of bends in the refrigerant piping used cannot exceed the number specified.

Total Number

The maximum allowable number of bends for all refrigerant piping between the outdoor unit and indoor units.

Outdoor Unit - Indoor Unit

The maximum allowable number of bends between the outdoor unit and each indoor unit when multiple indoor units are connected to a single outdoor unit.

Points to Remember when Installing Outdoor Units

Wind and snow can significantly reduce capacity. Be sure to check the information below and install the outdoor unit correctly.

Measure for Drainage Water

Case 1: Unit Is Installed Close To Passage (Walkway)

Do not install the unit close to passage as drainage water from the unit may freeze and cause a slipping hazard.



Wrong Installation

• Frozen drainage water may cause a slipping hazard.



Correct Installation

- Install at a sufficient height from the ground to prevent problems caused by frozen drainage water
- Install in a location where frozen drainage water will not be a hazard
- Install in an upright position to allow proper drainage from the drainage outlet

Case 2: Multiple Units Are Installed

Do not install units on top of one another as it may cause frozen drainage water on the bottom unit.



Wrong Installation

Bottom unit may freeze over




Correct Installation

Place units side by side

Installation Location

Be aware of the prevailing wind direction in winter and install the outdoor unit where it is as sheltered as possible.



Less influence of wind and unit runs at full capacity

Measure for Snow

Do Not Install The Unit On The Ground

To avoid the adverse effects of snow and frozen drainage water, install the unit on a stand to ensure a sufficient height from the ground.



Wrong Installation

Unit may become buried in snow due to heavy snowfall, snow sliding off the roof or snowdrift



Wrong Installation

Unit may be damaged due to snowfall or icicles



Correct Installation

Install at a position/height to prevent the unit being buried in snow*1 and the adverse effects of frozen drainage water.*2 Install so as to avoid the effects of snow or snowdrift. Install so as to avoid the damage from falling snow or icicles.

- *1 Install at a height above the highest snowfall depth.
- *2 Even for correct installations, dripping drainage water may form an icicle which needs to be cleared away regularly to prevent a blocked drainage outlet.

Recommended Accessories

	Snowy Region Countermeasures for Snow	Cold Region Countermeasures for Freezing	Remarks
Drain Socket, Centralized Drain Pan	Not Used	Not Used	Prevents Freezing
Stand	Needed	Needed	Install so as to prevent the unit being buried in snow (at a height greater than the highest snowfall depth). Be sure that the stand does not obstruct drainage. Install so as to prevent damage to the unit due to frozen drainage water (icicles).
Snow Protection Hood	Needed *When the installation is subject to snowfall		Prevents heat exchanger from being covered in snow. Prevents snow accumulating inside the air duct.
Base Heater		Needed	Outdoor units equipped with a heater for cold regions are those with an "H" in the model name. For the cold-climate zone, use of a unit with a heater is strongly recommended. Even for the moderate-climate zone use of a unit with a heater is recommended for regions subject to high humidity in winter.

CAUTION! Drainage Water Disposal

When the unit is installed in cold or snowy regions: Drainage water may freeze in the drain socket/hose and prevent the fan from rotating. **Do not attach a drain socket packaged as an accessory to the unit.**


In the case that fitting a drain socket is absolutely necessary, steps must be taken so that the drainage water does not freeze. For more information, please consult Mitsubishi Electric Trane HVAC US or one of its dealers/resellers.

Arrangement for snow protection hood: Separately sold parts are available for some models. Please consult Mitsubishi Electric Trane HVAC US or one of its dealers/resellers at the time of purchase for details.

System Control

Versatile system controls can be achieved by using optional parts, relay circuits, control panels, etc.

For M-Series Indoor Units

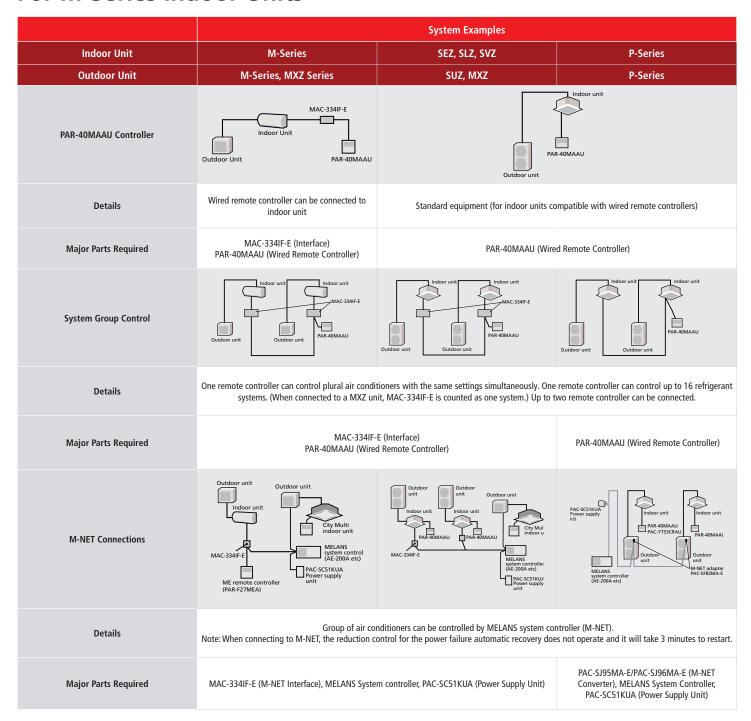

For M-Series Indoor Units


	System Examples	Connection Details	Control Details	Major Parts Required
Remote On/Off Operation Air conditioner can be started/ stopped remotely. 1 and 2 can be used in combination.	MAC-334IF-E Switch Remote control section (to be purchased locally)	Connect the interface to the air conditioner. Then connect the locally purchased remote controller to the terminal in the interface.	On/Off operation is possible from a remote location.	MAC-334IF-E (Interface) Parts for circuit such as relay
Remote Display of Operation Status The On/Off status of air conditioners can be confirmed remotely. ① and ② can be used in combination.	Power supply Resistance LED Qutdoor unit Remote monitor section (to be purchased locally)	Connect the interface to the air conditioner. Then connect the locally purchased remote controller to the terminal in the interface.	The operation status (On/Off) or error signals can be monitored from a remote location.	MAC-334IF-E (Interface) Parts for circuit to be purchased locally (DC power source needed) External power source (12V DC) is required when using MAC-334IF-E.

For P-Series, SLZ, SEZ and SVZ Indoor Units

	System Examples		2	
	Wired Remote Controller	Wireless Remote Controller	- Details	Major Parts Required
2-remote Controller Control With two remote controllers, control can be performed locally and remotely from two locations.	PAR-40MAAU * Set "Main" and "Sub" remote	PAR-FL32MA PAR-40MAAU * When using wired and wireless remote control	Up to two remote controllers can be connected to one group. Both wired and wireless remote controllers can be used in combination.	Wired Remote Controller: PAR-40MAAU, Wireless Remote Controller: PAR-FL32MA, Wireless Remote Controller Kit for PCA: PAR-SL93B-E
Operation Control by Level Signal The On/Off status of air Air conditioner can be started/ stopped remotely. In addition, On/Off operation by local remote controller can be prohibited/permitted.	Relay box (to be purchased) locally) Adapter for remote On/Off Remote control panel (Example of 1 : 1 system x 2)	Relay box (to be purchased locally Adapter for remote On/Off Remote PAR-FL32MA (Example of 1 : 1 system x 2)	Operation other than On/Off (e.g., adjust-ment of temperature, fan speed, and airflow) can be performed even when remote controller operation is prohibited. Timer control is possible with an external timer.	Adapter for remote On/Off: PAC-SE55RA-E, Relay box (to be pur- chased locally), Remote control panel (to be purchased locally)
Operation Control by Pulse Signal	Relay box (to be purchased) locally) Connector cable for remote display Remote control Wired remote controller (Example of 1: 1 system x 2)	Relay box (to be purchased locally Connector cable for remote display Remote PAR-FL32MA (Example of 1 : 1 system x 2)	The pulse signal can be turned On/Off. Operation/emergency signal can be received at a remote location.	Connector cable for remote display PAC-SA88HA-E / PAC-725AD (10 pcs. x PAC-SA88HA-E), Relay box (to be purchased locally), Remote control panel (to be purchased locally)
Remote Display of Operating Status Operating status can be displayed at a remote location.	Remote operation adapter/ General Control of Service Action (Control of Ser	Remote operation adapter/ Connector cable for remote display + ficially box Remote display - Remote display	Operation/emergency signal can be received at a remote location (when channeled through the PAC-SF40RM-E no-voltage signal, when channeled through the PAC-SA88HA-E DC 12V signal).	Remote display panel (to be purchased locally), Connector cable for remote display: PAC-SA88HA-E / PAC-725AD (10 pcs. x PAC-SA88HA-E), Relay box (to be purchased locally) Remote operation adapter: PAC-SF40RM-E *Unable to use with wireless remote controller
Timer Operation Allows On/Off operation with timer *For control by an external timer, refer to Control by Level Signal.	PAR-40MAAU (Example of 1 : 1 system)		Weekly Timer: On/Off and up to 8 pattern temperatures can be set for each calendar day. (Initial setting) On/Off Timer: On/Off can be set once each within 72 hr in intervals of 5-minute units. Auto-off Timer: Operation will be switched off after a certain time elapse. Set time can be changed from 30 min. to 4 hr. at 10 min. intervals.	Standard functions of PAR-40MAAU

Optional Parts

Part Name	Description
Deodorizing Filter Captures small foul-smelling substances in the air.	Deodorising filter
Air cleaning Filter Removes fine dust particles from the air by means of static electricity.	Air cleaning filter
Silver-ionized Air Purifier Filter Captures the bacteria, pollen and other allergens in the air and neutralizes them.	Silver-ionized Air Purifier Filter
Oil Mist Filter Element Filter element (12 pieces) that blocks the oil mist for ceiling-suspended models used in professional kitchens.	Filter frame Filter element
High-efficiency Filter Element Element for high-efficiency filter. Removes fine dust particles from the air.	Plug (for directing airflow) High-efficiency filter element *For 4-way cassette units (PLA)
Shutter Plate Plate for blocking an air outlet of the 4-way cassette (PLA) indoor unit.	Shutter Plate
Multi-functional Casement Casement for fresh-air intake and attaching the high-efficiency filter element (optional).	Indoor unit body Multi-functional casement
Space Panel Decorative cover for the installation when the ceiling height is low.	Space Panel Panel
Drain Pump Pumps drain water to a point higher than that where the unit is installed.	*for ceiling-suspended units

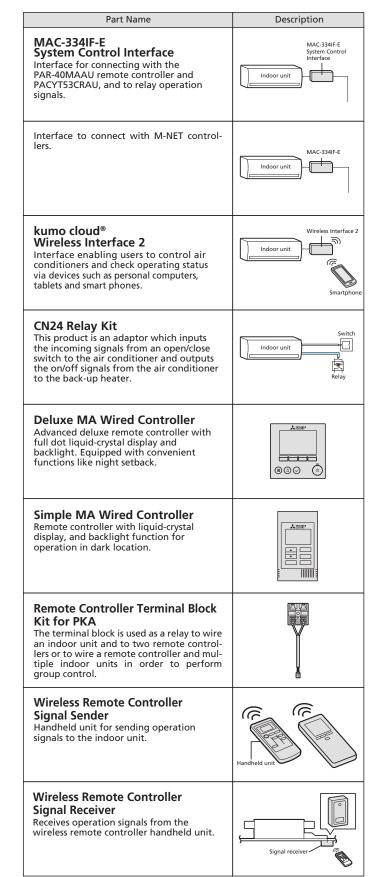

Part Name	Description
Wireless Remote Controller Kit (Sender & Receiver) Remote controller handheld unit (signal sender) and receiver (signal receiver) for ceiling-suspended units.	Signal receiver Signal sender
Control Holder Holder for storing the remote controller.	Control holder
Remote Sensor Sensor to detect the room temperature at remote positions.	PAC-USSEN001-FM-1
PAC-715AD Remote On/Off Adapter Connector for receiving signals from the local system to control the on/off function.	Remote on/off adapter
Remote Operation Adapter Adapter to display the operation status and control on/off function from a distance.	Remote operation adapter
PAC-725AD Connector Plug for Remote Display Connector used to display the operation status and control on/off function from a distance.	Connector cable for remote display Brown Red Orange Yellow Green
Distribution Pipe Branch pipe for P Series simultaneous multi-system use, or to connect two branch boxes for MXZ.	Indoor unit Indoor unit Distribution pipe *P Series with 2 indoor units
Joint Pipe Part for connecting refrigerant pipes of different diameters.	Joint pipe Onsite pipe Indoor unit Outdoor unit
Branch Box Outer Cover Casement for branch boxes.	Complete view Branch box outer cover

Part Name	Description
Air Protection Guide/Wind Baffle Protects the outdoor unit from the wind.	
Drain Socket A set of caps to cover unnecessary holes at the bottom of the outdoor unit, and a socket to guide drain water to the local drain pipe.	Cap
Centralized Drain Pan Catches drain water generated by the outdoor unit.	Outdoor unit Centralized drain pan Base (local construction)
M-NET Converter Used to connect P Series A-control models to M-NET controllers.	Group remote controller Power Supply unit for transmit cable
Control/Service Tool Monitoring tool to display operation and self-diagnosis data.	Control/service to
Air Discharge Guide Changes the direction of air being exhausted from the outdoor unit.	

M-Series Heating Capacity

		Outdoor Temperature Degrees								
Indoor Unit	Outdoor Unit	50° F	41° F	32° F	23° F	14° F	5° F	-4° F	-5° F	-13° F
MSZ-FS06NA	MUZ-FS06NA	14,445	13,703	12,962	12,149	11,037	9,924	_	8,700	7,721
MSZ-FS09NA	MUZ-FS09NA	18,554	17,631	16,707	15,068	13,304	11,540	_	9,600	8,048
MSZ-FS12NA	MUZ-FS12NA	21,714	20,524	19,333	18,143	16,464	14,482	_	12,301	10,556
MSZ-FS15NA	MUZ-FS15NA	24,544	23,637	22,730	21,823	19,988	18,089	_	16,001	14,330
MSZ-FS18NA	MUZ-FS18NA	30,619	29,587	28,556	27,524	25,129	22,211	_	19,001	16,433
MSZ-FS06NA	MUZ-FS06NAH	14,445	13,703	12,962	12,149	11,037	9,924	_	8,700	7,721
MSZ-FS09NA	MUZ-FS09NAH	18,554	17,631	16,707	15,068	13,304	11,540	_	9,600	8,048
MSZ-FS12NA	MUZ-FS12NAH	21,714	20,524	19,333	18,143	16,464	14,482	_	12,301	10,556
MSZ-FS15NA	MUZ-FS15NAH	24,544	23,637	22,730	21,823	19,988	18,089	_	16,001	14,330
MSZ-FS18NA	MUZ-FS18NAH	30,619	29,587	28,556	27,524	25,129	22,211	_	19,001	16,433
MSZ-GS09NA	MUZ-GS09NA	16,240	15,137	13,507	11,877	10,128	8,100	5,870	_	_
MSZ-GS12NA	MUZ-GS12NA	18,596	16,085	14,809	13,533	11,961	9,700	7,214	_	_
MSZ-GS15NA	MUZ-GS15NA	21,321	18,273	17,976	17,612	16,375	13,701	10,510	_	_
MSZ-GS18NA	MUZ-GS18NA	24,509	24,088	21,840	19,593	17,208	14,501	11,523	_	_
MSZ-GS24NA	MUZ-GS24NA	38,207	34,281	30,472	26,662	22,842	19,001	14,775	_	_
MSZ-GS30NA	MUZ-GS30NA	38,122	27,568	26,201	24,833	22,712	18,859	_	_	_
MSZ-GS36NA	MUZ-GS36NA	39,401	29,292	27,873	26,453	24,330	20,562	_	_	_
MSZ-HM09NA	MUZ-HM09NA	10,900	10,570	9,480	8,500	7,300	5,990	4,680	_	_
MSZ-HM12NA	MUZ-HM12NA	12,200	12,200	11,220	10,120	9,020	7,440	5,850	_	_
MSZ-HM15NA	MUZ-HM15NA	18,000	15,300	14,940	14,400	13,680	12,240	10,620	_	_
MSZ-HM18NA	MUZ-HM18NA	18,000	18,000	18,000	16,560	14,580	12,780	10,980	_	_
MSZ-HM24NA	MUZ-HM24NA	26,000	24,440	22,360	20,020	17,680	15,600	13,260	_	_
MSZ-JP09WA	MUZ-JP09WA	10,900	10,570	9,480	8,500	7,300	5,990	4,680	_	_
MSZ-JP12WA	MUZ-JP12WA	12,200	12,200	11,220	10,120	9,020	7,440	5,850	_	_
MSZ-WR09NA	MUZ-WR09NA-U2	10,900	10,570	9,480	8,500	7,300	5,990	_	_	_
MSZ-WR12NA	MUZ-WR12NA-U2	12,200	12,200	11,220	10,120	9,020	7,440	_	_	_
MSZ-WR18NA	MUZ-WR18NA-U2	18,000	18,000	18,000	16,560	14,580	12,780	_	_	_
MSZ-WR24NA	MUZ-WR24NA	26,000	24,440	22,360	20,020	17,680	15,600	_	_	_
MFZ-KJ09NA	MUFZ-KJ09NAHZ	11,000	11,000	11,000	11,000	11,000	11,000	9,130	_	7,260
MFZ-KJ12NA	MUFZ-KJ12NAHZ	13,000	13,000	13,000	13,000	13,000	13,000	10,790	_	8,450
MFZ-KJ15NA	MUFZ-KJ15NAHZ	18,000	18,000	18,000	18,000	18,000	18,000	14,940	_	13,860
MFZ-KJ18NA	MUFZ-KJ18NAHZ	21,000	21,000	21,000	21,000	21,000	21,000	18,480	_	15,960
MLZ-KP09NA2	SUZ-KA09NA2	12,000	10,680	9,240	7,800	6,480	5,040	3,720	_	_
MLZ-KP12NA2	SUZ-KA12NA2	15,400	13,700	11,850	10,010	8,310	6,460	4,770	_	_
MLZ-KP18NA2	SUZ-KA18NA2	20,000	17,800	15,400	13,000	10,800	8,400	6,200	_	_
MLZ-KP09NA2	SUZ-KA09NAHZ	12,000	12,000	12,000	12,000	12,000	12,000	8,520	_	5,160
MLZ-KP12NA2	SUZ-KA12NAHZ	15,000	15,000	15,000	15,000	15,000	15,000	10,650	_	6,450
MLZ-KP18NA2	SUZ-KA18NAHZ	18,600	18,600	18,600	18,600	18,600	18,600	13,200	-	7,990

M-Series Heating Capacity

to de contrato	Out by their	Outdoor Temperature Degrees								
Indoor Unit	Outdoor Unit	50° F	41° F	32° F	23° F	14° F	5° F	-4° F	-5° F	-13° F
SLZ-KF09NA	SUZ-KA09NA2	11,000	9,730	8,460	7,180	5,920	4,670	3,460	_	_
SLZ-KF12NA	SUZ-KA12NA2	13,000	11,510	10,000	8,490	6,990	5,520	4,080	_	_
SLZ-KF15NA	SUZ-KA15NA2	18,000	15,930	13,850	11,760	9,680	7,640	5,660	_	_
SLZ-KF18NA	SUZ-KA18NA2	19,700	17,440	15,150	12,870	10,600	8,370	6,190	_	_
SLZ-KF09NA	SUZ-KA09NAHZ	11,000	11,000	11,000	11,000	11,000	11,000	7,920	_	4,730
SLZ-KF12NA	SUZ-KA12NAHZ	13,800	13,800	13,800	13,800	13,800	13,800	9,936	_	5,934
SLZ-KF15NA	SUZ-KA15NAHZ	16,400	16,400	16,400	16,400	16,400	16,400	11,808	_	7,052
SLZ-KF18NA	SUZ-KA18NAHZ	18,800	18,800	18,800	18,800	18,800	18,800	13,536	_	8,084
SEZ-KD09NA4R1	SUZ-KA09NA2	12,000	10,620	9,230	7,840	6,450	5,090	3,770	_	_
SEZ-KD12NA4R1	SUZ-KA12NA2	15,000	13,280	11,540	9,800	8,070	6,370	4,710	_	_
SEZ-KD15NA4R1	SUZ-KA15NA2	18,000	15,930	13,850	11,760	9,680	7,640	5,660	_	_
SEZ-KD18NA4R1	SUZ-KA18NA2	21,600	19,120	16,620	14,110	11,620	9,170	6,790	_	_
SEZ-KD09NA4R1	SUZ-KA09NAHZ	12,500	12,500	12,500	12,500	12,500	12,500	9,000	_	5,375
SEZ-KD12NA4R1	SUZ-KA12NAHZ	15,000	15,000	15,000	15,000	15,000	15,000	10,800	_	6,450
SEZ-KD15NA4R1	SUZ-KA15NAHZ	15,000	15,000	15,000	15,000	15,000	15,000	10,800	_	6,450
SEZ-KD18NA4R1	SUZ-KA18NAHZ	21,600	21,600	21,600	21,600	21,600	21,600	15,552	_	9,288
PEAD-A09AA8	SUZ-KA09NA2	12,000	10,620	9,230	7,840	6,450	5,090	3,770	_	_
PEAD-A12AA8	SUZ-KA12NA2	15,000	13,280	11,540	9,800	8,070	6,370	4,710	_	_
PEAD-A15AA8	SUZ-KA15NA2	18,000	15,930	13,850	11,760	9,680	7,640	5,660	_	_
PEAD-A18AA8	SUZ-KA18NA2	21,600	19,120	16,620	14,110	11,620	9,170	6,790	_	_
PEAD-A24AA8	SUZ-KA24NA2	25,000	22,130	19,230	16,330	13,450	_	_	_	_
PEAD-A30AA8	SUZ-KA30NA2	30,000	26,560	23,080	19,600	16,140	_	_	_	_
PEAD-A36AA8	SUZ-KA36NA2	33,500	29,660	25,770	21,890	18,030	_	_	_	_
PEAD-A09AA8	SUZ-KA09NAHZ	12,000	12,000	12,000	12,000	12,000	12,000	8,640	-	5,160
PEAD-A12AA8	SUZ-KA12NAHZ	15,000	15,000	15,000	15,000	15,000	15,000	10,800	_	6,450
PEAD-A15AA8	SUZ-KA15NAHZ	18,000	18,000	18,000	18,000	18,000	18,000	12,960	-	7,740
PEAD-A18AA8	SUZ-KA18NAHZ	21,600	21,600	21,600	21,600	21,600	21,600	15,552	_	9,288

P-Series Heating Capacity

	Outdoor Temperature Degrees									
Indoor Unit	Outdoor Unit	50° F	41° F	32° F	23° F	14° F	5° F	-4° F	-5° F	-13° F
PLA-A12EA7	PUZ-A12NKA7	_	_	_	_	_	_	_	_	_
PLA-A18EA7	PUZ-A18NKA7	_	_	_	_	_	_	_	_	_
PLA-A24EA7	PUZ-A24NHA7	_	_	_	_	_	_	_	_	_
PLA-A30EA7	PUZ-A30NHA7	_	_	_	_	_	_	_	_	_
PLA-A36EA7	PUZ-A36NKA7	_	_	_	_	_	_	_	_	_
PLA-A42EA7	PUZ-A42NKA7	_	_	_	_	_	_	_	_	_
PLA-A24EA7	PUZ-HA24NHA1	26,000	26,000	26,000	26,000	26,000	26,000	_	23,140	20,800
PLA-A30EA7	PUZ-HA30NKA	32,000	32,000	32,000	32,000	32,000	32,000	_	28,480	25,600
PLA-A36EA7	PUZ-HA36NKA	38,000	38,000	38,000	38,000	38,000	38,000	_	33,820	30,400
PLA-A42EA7	PUZ-HA42NKA1	48,000	48,000	48,000	48,000	48,000	48,000	_	42,720	38,400
PKA-A12LA	PUZ-A12NKA7	14,000	14,000	14,000	14,000	14,000	14,000	12,460	_	11,200
PKA-A18LA	PUZ-A18NKA7	19,000	19,000	19,000	19,000	19,000	19,000	16,910	_	15,200
PKA-A24KA7	PUZ-A24NHA7	_	_	_	_	_	_	_	_	_
PKA-A30KA7	PUZ-A30NHA7	_	_	_	_	_	_	_	_	_
PKA-A36KA7	PUZ-A36NKA7	_	_	_	_	_	_	_	_	_
PKA-A24KA7	PUZ-HA24NHA1	26,000	26,000	26,000	26,000	26,000	26,000	_	23,140	20,800
PKA-A30KA7	PUZ-HA30NKA	32,000	32,000	32,000	32,000	32,000	32,000	_	28,480	25,600
PKA-A36KA7	PUZ-HA36NKA	38,000	38,000	38,000	38,000	38,000	38,000	_	33,820	30,400
PVA-A12AA7	PUZ-A12NKA7	_	_	_	_	_	_	_	_	_
PVA-A18AA7	PUZ-A18NKA7	_	_	_	_	_	_	_	_	_
PVA-A24AA7	PUZ-A24NHA7	_	_	_	_	_	_	_	_	_
PVA-A30AA7	PUZ-A30NHA7	_	_	_	_	_	_	_	_	_
PVA-A36AA7	PUZ-A36NKA7	_	_	_	_	_	_	_	_	_
PVA-A42AA7	PUZ-A42NKA7	_	_	_	_	_	_	_	_	_
PVA-A24AA7	PUZ-HA24NHA1	26,000	26,000	26,000	26,000	26,000	26,000	_	23,140	20,800
PVA-A30AA7	PUZ-HA30NKA	32,000	32,000	32,000	32,000	32,000	32,000	_	28,480	25,600
PVA-A36AA7	PUZ-HA36NKA	38,000	38,000	38,000	38,000	38,000	38,000	_	33,820	30,400
PVA-A42AA7	PUZ-HA42NKA1	48,000	48,000	48,000	48,000	48,000	48,000	_	42,720	38,400
PEAD-A12AA8	PUZ-A12NKA7	_	_	_	_	_	_	_	_	_
PEAD-A18AA8	PUZ-A18NKA7	_	_	_	_	_	_	_	_	_
PEAD-A24AA8	PUZ-A24NHA7	_	_	_	_	_	_	_	_	_
PEAD-A30AA8	PUZ-A30NHA7	_	_	_	_	_	_	_	_	_
PEAD-A36AA8	PUZ-A36NKA7	_	_	_	_	_	_	_	_	_
PEAD-A24AA8	PUZ-HA24NHA1	_	-	-	-	-	_	_	-	-
PEAD-A30AA8	PUZ-HA30NKA	_	_	_	_	_	_	_	_	_
PEAD-A36AA8	PUZ-HA36NKA	_	_	_	-	_	-	_	-	-
PEAD-A42AA7	PUZ-HA42NKA1	_	_	_	_	_	_	_	_	_
PCA-A24KA7	PUZ-A24NHA7	-	-	-	-	-	-	-	-	-

P-Series Heating Capacity

		Outdoor Temperature Degrees								
Indoor Unit	Outdoor Unit	50° F	41° F	32° F	23° F	14° F	5° F	-4° F	-5° F	-13° F
PCA-A30KA7	PUZ-A30NHA7	_	_	_	_	_	_	_	_	_
PCA-A36KA7	PUZ-A36NKA7	_	_	_	_	_	_	_	_	_
PCA-A42KA7	PUZ-A42NKA7	_	_	_	_	_	_	_	_	_
PCA-A24KA7	PUZ-HA24NHA1	26,000	26,000	26,000	26,000	26,000	26,000	_	23,140	20,800
PCA-A30KA7	PUZ-HA30NKA	32,000	32,000	32,000	32,000	32,000	32,000	_	28,480	25,600
PCA-A36KA7	PUZ-HA36NKA	38,000	38,000	38,000	38,000	38,000	38,000	_	33,820	30,400
PCA-A42KA7	PUZ-HA42NKA1	48,000	48,000	48,000	48,000	48,000	48,000	_	42,720	38,400
PAA-A18AA1	PUZ-A24NHA7	19,000	19,000	14,150	12,840	11,970	11,190	9,550	_	_
PAA-A18BA1	PUZ-A24NHA7	19,000	19,000	14,150	12,840	11,970	11,190	9,550	_	_
PAA-A24AA1	PUZ-A24NHA7	26,000	26,000	19,370	17,570	16,380	15,310	13,070	_	_
PAA-A24BA1	PUZ-A24NHA7	26,000	26,000	19,370	17,570	16,380	15,310	13,070	_	_
PAA-A30AA1	PUZ-A30NHA7	32,000	32,000	23,840	21,630	20,160	18,840	16,090	_	_
PAA-A30BA1	PUZ-A30NHA7	32,000	32,000	23,840	21,630	20,160	18,840	16,090	_	_
PAA-A36BA1	PUZ-A36NKA7	38,000	38,000	28,310	25,680	23,940	22,380	19,110	_	_
PAA-A36CA1	PUZ-A36NKA7	38,000	38,000	28,310	25,680	23,940	22,380	19,110	_	_
PAA-A42BA1	PUZ-A42NKA7	46,000	46,000	34,270	31,090	28,980	27,090	23,130	_	_
PAA-A42CA1	PUZ-A42NKA7	46,000	46,000	34,270	31,090	28,980	27,090	23,130	_	_
PAA-A24AA1	PUZ-HA24NHA1	26,000	26,000	26,000	26,000	26,000	26,000	23,140	_	20,800
PAA-A24BA1	PUZ-HA24NHA1	26,000	26,000	26,000	26,000	26,000	26,000	23,140	_	20,800
PAA-A30AA1	PUZ-HA30NKA	32,000	32,000	32,000	32,000	32,000	32,000	28,480	-	25,600
PAA-A30BA1	PUZ-HA30NKA	32,000	32,000	32,000	32,000	32,000	32,000	28,480	_	25,600
PAA-A36BA1	PUZ-HA36NKA	38,000	38,000	38,000	38,000	38,000	38,000	33,820	-	30,400
PAA-A36CA1	PUZ-HA36NKA	38,000	38,000	38,000	38,000	38,000	38,000	33,820	_	30,400

^{— =} Data unavailable at print

MXZ Heating Capacity

Indoor Unit	Outdoor Temperature Degrees										
indoor Unit	50° F	41° F	32° F	23° F	14° F	5° F	-4° F	-13° F			
MXZ-2C20NA4	22,000	22,000	18,920	15,840	12,980	9,900	_	_			
MXZ-3C24NA4	25,000	25,000	24,000	20,750	17,250	13,250	_	_			
MXZ-3C30NA4	28,600	28,600	28,020	24,310	20,300	15,730	_	_			
MXZ-4C36NA4	36,000	36,000	33,480	29,160	24,120	18,720	_	_			
MXZ-5C42NA4	45,000	45,000	41,850	36,450	30,150	23,400	_	_			
MXZ-2C20NAHZ4	22,000	22,000	22,000	22,000	22,000	22,000	21,120	20,460			
MXZ-3C24NAHZ4	25,000	25,000	25,000	25,000	25,000	25,000	23,750	22,500			
MXZ-3C30NAHZ4	28,600	28,600	28,600	28,600	28,600	28,600	26,880	25,160			
MXZ-SM36NAM	48,000	48,000	48,000	39,840	32,160	28,800	25,440	_			
MXZ-SM48NAM	48,000	48,000	48,000	39,840	32,160	28,800	25,440	_			
MXZ-SM60NAM	60,000	60,000	60,000	51,000	40,800	36,000	31,200	_			
MXZ-SM36NAMHZ	36,000	36,000	36,000	36,000	36,000	36,000	30,960	26,640			
MXZ-SM42NAMHZ	42,000	42,000	42,000	42,000	42,000	42,000	36,120	31,080			
MXZ-SM48NAMHZ	48,000	48,000	48,000	48,000	48,000	48,000	41,280	35,520			


Additional P-Series Information

Outlet Air Speed and Coverage Range*

Model	Airflow (CFM)	Air Speed (ft/sec)	Coverage Range (ft)
PCA-A24KA7	670	10.2	32
PCA-A30KA7	705	10.5	33
PCA-A36KA7	990	11.8	41
PCA-A42KA7	1,025	12.1	42
PKA-A12HA7	425	20.0	35
PKA-A18HA7	425	20.0	35
PKA-A24HA7	775	19.7	47
PKA-A30HA7	775	19.7	47
РКА-АЗ6НА7	920	22.3	53
PLA-A12EA7	530	7.8	13
PLA-A18EA7	600	8.8	14
PLA-A24EA7	810	11.9	19
PLA-A30EA7	880	12.9	21
PLA-A36EA7	1,200	17.6	28
PLA-A42EA7	1,200	17.6	28




M-Series Model Reference Guide

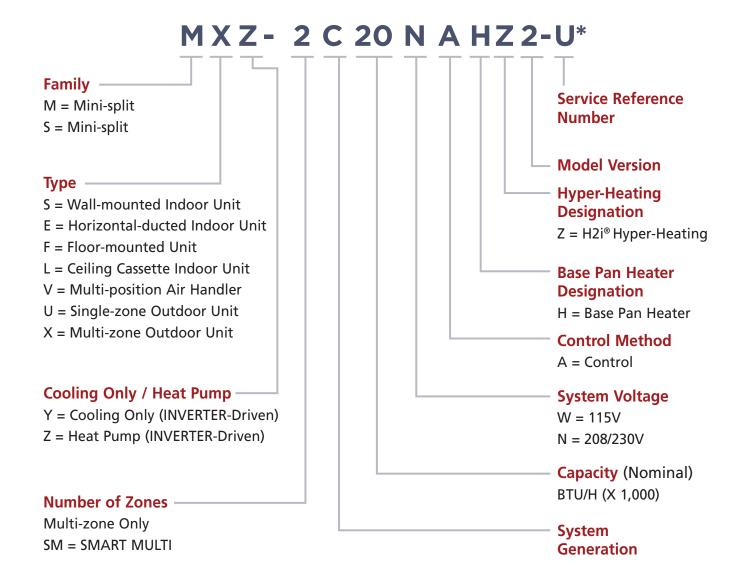

- Designed for residential applications
- User-friendly zoned cooling and heating solutions for single- or multi-room applications or the whole home
- · Hyper-Heating INVERTER® (H2i®) outdoor units can provide high heating performance at lower ambient temperatures
- Many ENERGY STAR® certified models

P-Series Model Reference Guide

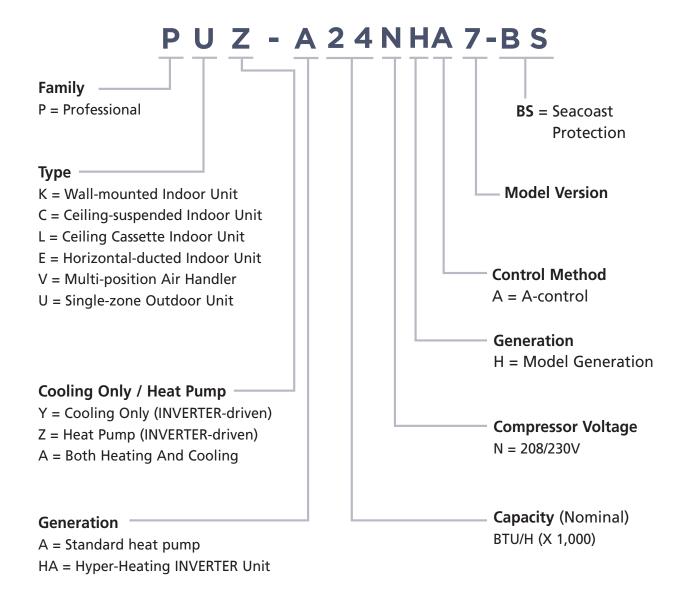

- Designed for light commercial installations. Ideal for applications requiring year-round, low ambient cooling such as computer, elevator and equipment rooms
- Hyper-Heating INVERTER® (H2i®) outdoor units can provide superior heating performance at lower ambient temperatures
- Long lineset lengths
- Outside air intake on PLA, PCA, PEAD and PVA models
- P-Series ducted units have higher static than most M-Series, allowing for design flexibility



mitsubishicomfort.com

MITSUBISHI ELECTRIC TRANE HVAC US

© 2024 Mitsubishi Electric Trane HVAC US LLC. All rights reserved.

Mitsubishi Electric, Lossnay, and the three-diamond logo are trademarks of Mitsubishi Electric Corporation. CITY MULTI, kumo cloud, kumo station and H2i are registered trademarks of Mitsubishi Electric US, Inc. is a registered trademark of Trane Technologies plc. All other product names mentioned herein are trademarks or registered trademarks of their respective owners.

ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the United States Environmental Protection Agency.

Use of the AHRI Certified® mark indicates a manufacturer's participation in the certification program. For verification of certification for individual products, go to www.ahridirectory.org. Specifications shown in this brochure are subject to change without notice. See complete warranty for terms, conditions and limitations. A copy is available from Mitsubishi Electric Trane HVAC US LLC.

Printed in the USA ME_RS_0396_5-24