

Job Name:

System Reference:

Date:


**SPECIFICATIONS**

- Controls group operation for up to 15 Lossnay® units in a single group
- User defined functions:
 - ON/OFF
 - Heat Recovery Mode: Ventilation air and return air both enter the Lossnay® core for heat exchange
 - Bypass Mode: Ventilation air enters through the Lossnay® core and return air bypasses the core and is exhausted
 - Auto Mode: Lossnay® automatically changes between the
 - Bypass and Heat Recovery Modes based on space and outside air conditions
 - Delayed Operating Function: Time setting from HVAC controller for delayed ON or OFF operation
 - Night Purge Function
 - Fan speed setting: Extra Low, Low, High/Extra High
 - Timer Operation: Weekly Timer (ON/OFF settings up to 8 times per day of the week in 1-minute increments)
- Simple Timer (ON/OFF time can be set once within 72-hour period in 1-hour increments)
- Display features:
 - Temperature Display: "Outside Air", "Return Air" and calculated "Supply Air"
 - Filter Display: Displays when filter/core requires maintenance based on run time hours
 - Fan Speed Display: "Extra Low", "Low", "High/Extra High"
 - Auto Fan Speed Display: "AUTO" when External Fan Speed
 - Input is active
 - External Control Input Indication: Indicates that Lossnay® is utilizing External Control Input
- Diagnostics: Displays four-digit error code and error unit address
- Grouping: Same group use only with other PZ-60DR Lossnay®
- Remote Controllers and up to two remote controllers per group
- Addressing: No addressing required
- Dimensions: 4-3/4 x 5-1/8 x 3/4" (120 x 130 x 19mm)


NOTES:

DIMENSIONS: PZ-60DR-E

SYSTEM EXAMPLE: OPERATING WITH CITY MULTI®

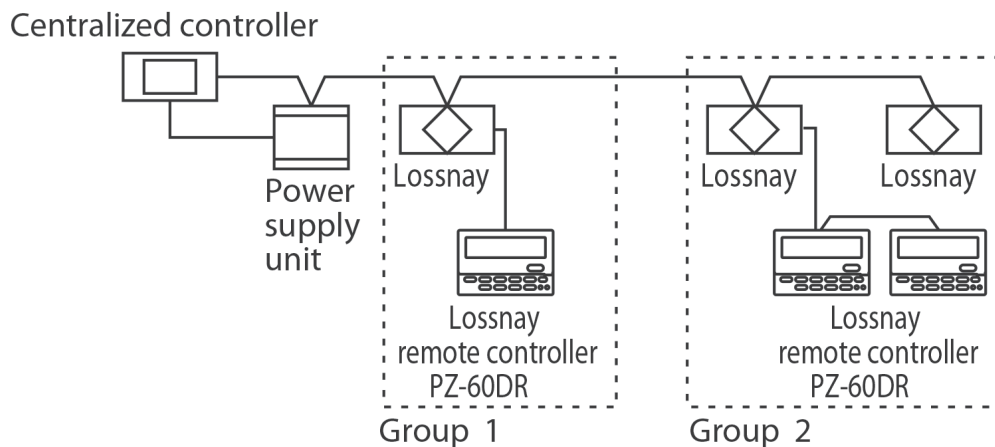


SYSTEM EXAMPLE: OPERATING STAND ALONE

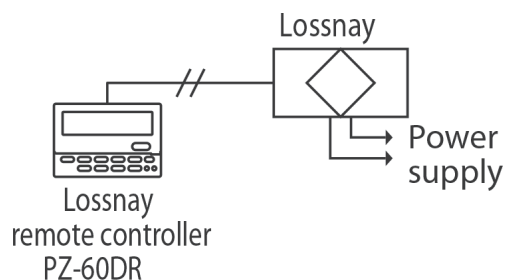

PZ-60DR-E - DIMENSIONS

Unit: in.[mm]

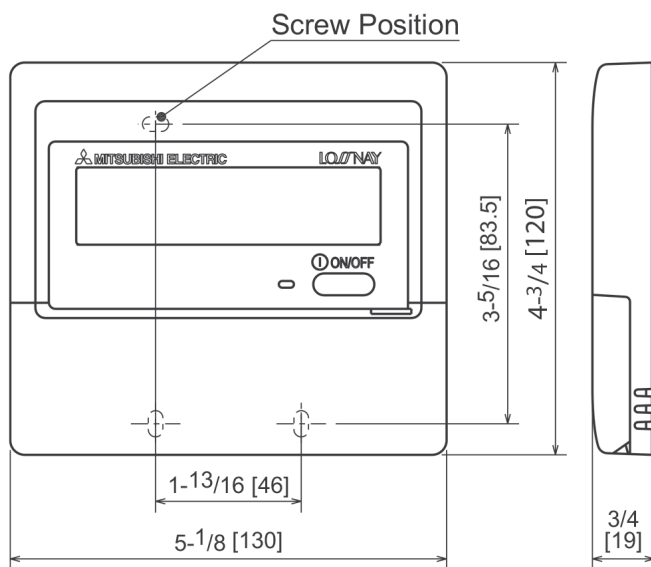

COOLING & HEATING

1340 Satellite Boulevard, Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com