

A variety of tooth options are available on the 2460XP, ensuring that you can produce the perfect product for your markets. It excels at processing larger diameter material, stumps and chunkwood.

DISCHARGE TO GREAT

The discharge conveyor makes it easy to load open-top trucks or build large piles of chips and mulch. The two-stage belt conveyor consists of a 42"-wide primary belt that pulls everything from under the mill to the 2 speed secondary belt.

The Model 2460XP is maintenance-friendly with easy access to wear items, and simple hydraulic and electrical systems. Screens are simple to change by being pulled from the side of the machine, and ladders, steps and handrails help operators feel secure while climbing and working on the machine. There is easy access to the mill for changing teeth and cutterbodies.

When encountering ungrindable contaminants, The Beast's cutterbodies and teeth are designed to absorb the shock of the blow, protecting the cuttermill and support arms. This limits the downtime for mill repairs to the time it takes to replace teeth and rakers. And the 2460XP, like every other one of The Beast horizontal grinders, has a unique waste gate that makes it easy to quickly remove of any contaminants from the mill and screening area, limiting damage to the mill and wear parts.



6750 Millbrook Rd. • Remus, MI 49340 • 1-800-952-0178









Hand-Fed Chippers • Stump Grinders • Whole Tree Chippers The Beast® Horizontal Grinders • Track Carriers • Attachments

SPECIFICATIONS

MEASUREMENTS	2460XP	
Length:	42'8"	1,300.5 cm
Width:	8' 6"	259.1 cm
Height:	13' 6"	411.5 cm
Weight:	48,000 lbs. (21,772 kg)	
Engines:	536 HP	
Fuel Tank:	200 gal.	757 L
Hydraulic Tank:	120 gal.	454 L

ENGINE OPTION

Make and Model: CAT C13

Gross HP: 536 HP

Fan: Reversing

Clutch Type: HPT012 PT Tech Dry

DIMENSIONS			
Capacity:	24" Capacity	61 cm Capacity	
Opening:	24" tall x 60" wide	61 cm x 152 cm wide	
Cuttermill:	36" dia. x 60" wide	91 cm dia. x 152 cm wide	
Teeth:	30		
Feed Wheel:	(1) 20" dia. x 59" wide	(1) 51 cm x 150 cm wide	
Infeed Conveyo (447 cm long x	r: 5-speed (10-50 FPM), 14'8" lo 152 cm wide)	ng x 60" wide	

Discharge Conveyor: Primary and Secondary discharge conveyors. Secondary Conveyor: 22'9" long x 42" wide (up to 381-584 FPM conveyor speed, stacking height 15' (457.2 cm)

UNDERCARRIAGE

Towable: (2) 20,000 pound (9,072 kg) axles with (4) 385/60R 22.5" (57.2 cm) tires

Standard & Custom Colors Available

Choose from two standard colors, or select a custom color to match your fleet.





Bandit Yellow


Since 1983, Bandit has manufactured equipment for a multitude of wood waste processing markets. The vision since the beginning, is to build quality, highly productive, easy to maintain equipment providing years of dependable service.

The commitment for quality, innovation and dedication is instilled in every employee and is one of the main reasons why Bandit became an Employee-Owned Company (ESOP) in 2018. These core values ensure each Bandit machine will leave the factory ready to exceed your expectations.

Caterpillar steel track undercarriage can be added to the 2460XP. This feature allows it to travel over rough terrain not accessible by towable units. It also eliminates the need to forward or skid material to the 2460XP - the operator can take the grinder to the trees.



When you choose The Beast® Horizontal Grinder, you'll experience more uniform chip production, smoother and more efficient chipping, long-lasting components and improved fuel economy. We invite you to see for yourself by scheduling a demo with your nearest authorized Bandit dealer.

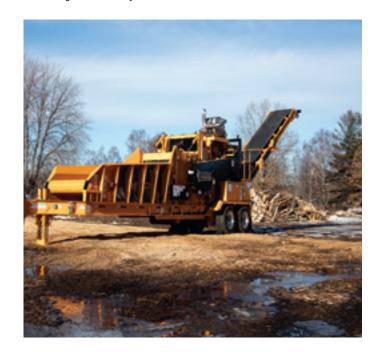

Bandit Offers a Complete Line of Tree Care Equipment: Hand-Fed Chippers • Stump Grinders • Whole Tree Chippers The Beast® Horizontal Grinders • Track Carriers • Attachments