

"Apollo" Valves

SUBMITTAL SHEET

LEAD FREE

77FLF-200 Series

Full Port Solder End Brass Ball Valve



Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	
Wholesale Distributor:	



DESCRIPTION

The Apollo 77FLF-200 series is a Lead Free* full port forged brass ball valve ideal for a wide range of plumbing and heating applications, including potable water. These two piece style solder connection valves carry multi-agency approvals and are deigned to provide reliable operation at a competitive price. The 77FLF-200 series valve is intended to be soft soldered into lines without disassembly. Proudly Made in the USA

FEATURES

- Lead Free* Materials and Approvals
- Heavy Pattern Forged Design
- Full-Port Flow
- Superior RPTFE Seats and Packing
- Adjustable Stem Packing
- Blow-Out Proof Stem
- Corrosion Resistant Materials
- Silicone Free assembly
- 100% Factory Tested
- Made in USA, ARRA Compliant

PERFORMANCE RATING

- Rating: 600 CWP (1/4" – 2")
- Rating: 400 CWP (2-1/2" – 4")
- Temperature Range: 0°F - 400°F
- Vacuum Service to 29 in. Hg

APPROVALS

- MSSP-SP-110 Ball Valves
- IAPMO IGC-157 Ball Valves
- FM 1140 (1/2" - 2")
- NSF/ANSI 61 Section 8, Annex G
- NSF/ANSI 372

OPTIONS


- (-01) Standard Lever
- (-04) 2-1/4" Stem Extension (1/4" – 2-1/2")
- (-07) Tee Handle (1/4" – 2")
- (-11) Therma-Seal™ Insulating Tee Handle (1/4" – 2")
- (-27) Locking Handle SS (1/4" – 2-1/2")
- 77FLF240 Series – SS Ball & Stem

STANDARD MATERIALS LIST

Part Name	Material
Body	Forged Lead Free Brass, C27451
Seat	Reinforced RPTFE
Ball	Lead Free Brass, C27451, Chrome Plated
Stem Packing	Reinforced RPTFE
Nut	Corrosion Resistant Plated Steel
Stem	Lead Free Brass, C27451
Retainer	Lead Free Brass, C27451
Handle	Plated Steel / Insulated Polyvinyl
Gland	Brass, ASTM B16, alloy C36000

DIMENSIONS

Model Number	Size (in.)	Dimensions (in.)						Wt. (lbs.)
		A	B	C	D	E	F	
77FLF-203-01	1/2"	0.50	1.37	2.37	1.66	2.85	0.50	0.4
77FLF-204-01	3/4"	0.75	1.72	3.13	1.91	3.86	0.75	0.9
77FLF-205-01	1"	1.00	2.01	3.73	2.11	3.86	0.91	1.3
77FLF-206-01	1-1/4"	1.25	2.07	3.97	2.44	4.75	0.97	2.0
77FLF-207-01	1-1/2"	1.50	2.42	4.69	2.91	5.42	1.09	3.3
77FLF-208-01	2"	2.00	2.91	5.82	3.69	7.77	1.34	5.6
77FLF-209-01	2-1/2"	2.50	3.68	7.05	4.14	7.77	1.48	11.6
77FLF-200-01	3"	3.00	4.26	8.15	5.03	9.92	1.67	19.3
77FLF-24A-01	4"	4.00	4.82	9.57	5.70	14.78	2.16	25.6

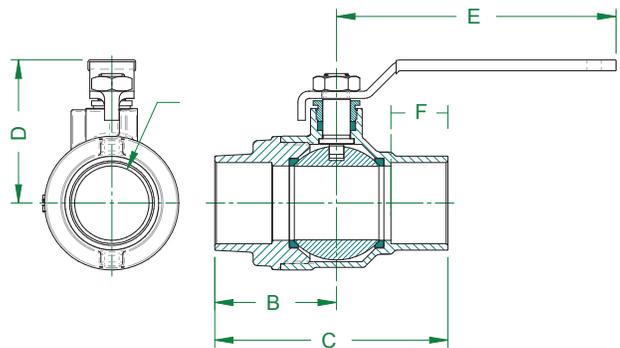

* LEAD FREE: The wetted surfaces of this product shall contain no more than 0.25% lead by weighted average. Complies with Federal Public Law 111-380. ANSI 3rd party approved and listed.

Apollo Valves, Manufactured by **Conbraco Industries, Inc.**
701 Matthews Mint-Hill Road, Matthews, NC 28105 USA
www.apollovalves.com | (704) 841-6000

This specification is provided for reference only. Conbraco Industries Inc. reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold. Please visit our website at www.apollovalves.com for the most current information.

