

# **6200 Series Zone Control Panels**


# **EVERY JOB IS DIFFERENT**

Aprilaire offers flexibility for all your zone control applications by providing you with all the features you demand.

Accounting for excess system pressure is a requirement of any zone control system and we know there are many options for pressure relief. That is why Aprilaire supports all the popular options. You can choose from Aprilaire's exclusive 'Controlled Pressure Relief' method (which requires no bypass damper), using a bypass damper along with plenum temperature control, or choosing to bypass to a dump zone.



The 6200 Series Zone Control panels offer you the quality and support you've come to expect from Aprilaire. You can count on 24-hour shipping, great technical and sales support and the most reliable dampers on the market.

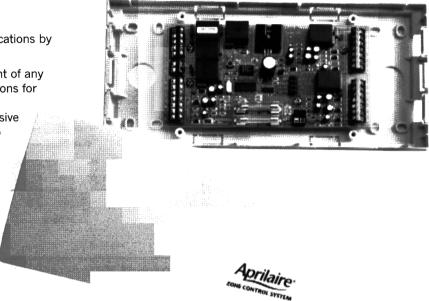

6200 SERIES SINGLE STAGE HEAT/COOL

# MODELS 6202 & 6203

#### **CONSUMER BENEFITS**

#### **ANY ZONE SETS MODE**

Provides true independent control for each zone

# **CONTINUOUS FAN BY ZONE**

 Individual zone thermostats can call for fan operation independently for ventilation

#### **ZONE CHANGEOVER BASED ON TIME**

 If calls for opposite modes exist, the control panel will alternate to satisfy each call

#### **FAN PURGE**

· Assures air is directed to last zone(s) calling

#### SHORT CYCLE PROTECTION

Protects the HVAC equipment from too frequent cycles

#### MAINTENANCE FREE

No maintenance or adjustments needed after installation

#### **CONTRACTOR BENEFITS**

 Protects equipment from excessive high and low temperatures caused by reduced airflow when small zones are calling

# **LED STATUS INDICATORS**

· Simplifies start up and troubleshooting for the contractor

# TIME DELAY OVERRIDE

Speeds checkout for the installer

PLENUM TEMPERATURE CONTROL (ADJUSTABLE)

# **WORKS WITH 2 OR 3 WIRE DAMPERS**

• Compatibilility if you are changing out an old panel with 3 wire dampers

#### **FUSE PROTECTION**

Protects the control panel against mis-wiring

#### **EXTRA FUSE ON BOARD**

• Convenience if fuse blows


#### **ADJUSTABLE PURGE TIMING**

· Compatibility with all brands of equipment

#### **ELEC/NON-ELEC SWITCH**

 Proper control of the fan (G-terminal) for either electric or fossil fuel furnaces

# **APRILAIRE MODEL 6202 & 6203 ZONE CONTROL PANELS**

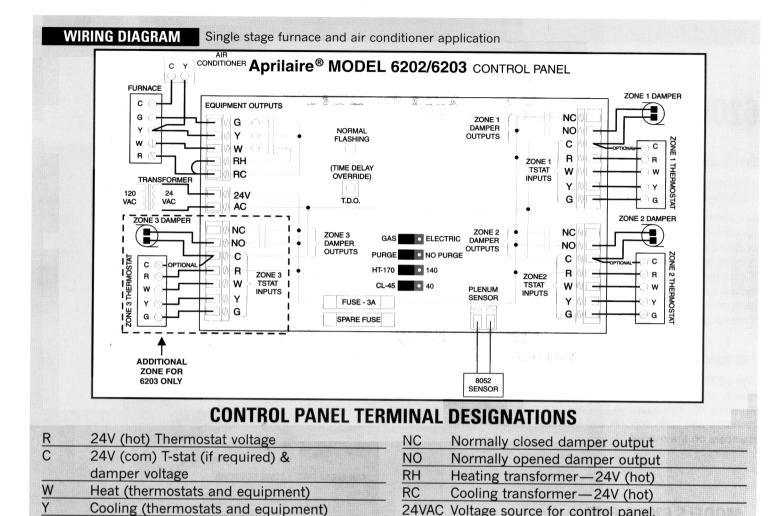

PRODUCT SPECIFICATIONS		
RATED VOLTAGE	20 to 30 VAC	
RATED CURRENT	3 amp	
FUSE RATING	3 amp, slow blow fuse	
MAXIMUM OPERATING TEMPERATURE	140°F	
RH AND RC TERMINALS	Independent heat and cool relays for 2 transformer systems	
PLENUM SENSOR	,	
HIGH LIMIT TEMPERATURE	Selectable between 140°F and 170°F	
PLENUM SENSOR		
LOW LIMIT TEMPERATURE	Selectable between 40°F and 45°F	

TRANSFORMER REQUIREMENTS		
REQUIRED VA	MAX. # 0F POWERED DAMPERS	
40	3 or Less	
75	4 thru 6	
40 per 3 Dampers	7 or more	


24VAC Voltage source for control panel,

T-stats and dampers

#### ADDITIONAL INSTALLATION FEATURES

Fan (thermostats and equipment)

**45 DEGREE ANGLED TERMINALS ENCLOSURE ACCOMMODATES WIRING FROM THE SIDE OR REAR** WIRING DIAGRAM ON FRONT COVER **AVAILABLE TERMINAL FOR 24 VOLT POWERED STATS** COMPATIBLE WITH COMMON POWER-STEALING THERMOSTATS



G