

Job Name:

System Reference:

Date:

****APPLIES TO INDOOR UNIT:**

- ☐ SEZ-KD09NA4
- ☐ SEZ-KD09NA4.TH
- ☐ SEZ-KD09NAR1.TH
- ☐ SEZ-KD09NA4R1.TH



Indoor Unit: SEZ-KD09NA4**



Outdoor Unit: SUZ-KA09NA

GENERAL FEATURES

- Horizontal-ducted indoor unit for concealed
- Ultra thin body: 7-7/8" high
- Built-in drain mechanism for condensate removal; lifts to 21-11/16"
- Air filter is included with indoor unit
- Quiet operation — as low as 23 dBA
- Indoor unit powered from outdoor unit using A-Control
- AUTO fan speed control
- Automatic restart following a power outage
- Limited warranty: five years parts and seven years compressors

ACCESSORIES**Indoor Unit**

- ☐ Condensate Pump (BlueDiamond X87-711/721; 115/230V)
- ☐ Condensate Pump (Sauermann SI30-115/230; 115/230V)
- ☐ Filter Box with MERV 8 Filters (FBL1-1)
- ☐ Bottom Return Plate (BRP-1)

Outdoor Unit

- ☐ Three-pole Disconnect Switch (TAZ-MS303)
- ☐ Air Outlet Guide (MAC-889SG)
- ☐ Mounting Base (DSD-400P)
- ☐ Mounting Pad (ULTRILITE1)
- ☐ Wall Mounting Bracket (QSWB2000M-1)

Controller Options

- ☐ Wireless Controller (MHK1)
- ☐ Wired Remote Controller (PAR-32MAA-J)
- ☐ Wireless Interface for kumo cloud™ (PAC-WHS01WF-E)
- ☐ Thermostat Interface (PAC-US444CN-1)
- ☐ Hand-held Wireless Remote Controller (PAR-FL32MA; req.PAR-FA32MA-E)
- ☐ Wireless Signal Receiver Module PAR-FA32MA (for PAR-FL32MA-E)

SPECIFICATIONS**Cooling¹**

Rated Capacity 8,100 Btu/h
 Capacity Range 3,800 - 10,900 Btu/h
 SEER 15.0
 Total Input 670 W

Heating at 47°F²

Rated Capacity 10,900 Btu/h
 Capacity Range 4,800 - 14,100 Btu/h
 HSPF 10.0
 Total Input 1,020 W

Heating at 17°F³

Rated Capacity 6,700 Btu/h
 Rated Total Input 810 W
 Maximum Capacity** 6,700 Btu/h
 Maximum Total Input 1,000 W

¹ Cooling | Indoor: 80° F (27° C) DB / 67° F (19° C) WB^{*}¹ Cooling | Outdoor: 95° F (35° C) DB / 75° F (24° C) WB^{*}² Heating at 47° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB^{*}² Heating at 47° F | Outdoor: 47° F (8° C) DB / 43° F (6° C) WB^{*}³ Heating at 17° F | Indoor: 70° F (21° C) DB / 60° F (16° C) WB^{*}³ Heating at 17° F | Outdoor: 17° F (-8° C) DB / 15° F (-9° C) WB^{*}^{*} Rating Conditions per AHRI Standard^{**} Maximum Capacity is at full speed and performance for INVERTER-driven System.

ENERGY STAR® Yes
 ENERGY STAR products are third-party certified by an EPA-recognized Certification Body.

Electrical Requirements

Power Supply 208 / 230V, 1-Phase, 60 Hz
 Recommended Fuse/Breaker Size 15 A

OPERATING CONDITIONS

		Indoor Intake Air Temp.	Outdoor Intake Air Temp.
Cooling ⁴	Maximum	90° F (32° C) DB 73° F (23° C) WB	115° F (46° C) DB
	Minimum	67° F (19° C) DB 57° F (14° C) WB	14° F (-10° C) DB
Heating	Maximum	80° F (27° C) DB 67° F (19° C) WB	75° F (24° C) DB 65° F (18° C) WB
	Minimum	70° F (21° C) DB 60° F (16° C) WB	-4° F (-20° C) DB ⁵ -5° F (-21° C) WB ⁵

⁴ Applications should be restricted to comfort cooling only; equipment cooling applications are not recommended for low ambient temperature conditions.

⁵ System cuts out at -9° F (-27° C) to avoid thermistor error and automatically restarts at -4° F (-20° C).

Voltage

Indoor - Outdoor S1-S2 AC 208 / 230V
 Indoor - Outdoor S2-S3 DC ±24V

Indoor Unit

MCA 1 A
 Fan Type x Quantity Sirocco Fan x 2
 Blower Motor Type Direct-driven DC Brushless Motor
 Blower Motor Output 96 W
 Blower Motor (ECM) 0.51 F.L.A.
 Airflow (Lo - Med - Hi) 194 - 247 - 317 Dry CFM
 174 - 222 - 285 Wet CFM
 Air Filter Polypropylene Honeycomb
 External Static Pressure 0.02 - 0.06 - 0.14 - 0.20" WG
 Sound Pressure Level (Lo - Med - Hi) 23 - 26 - 30 dB(A)

DIMENSIONS	UNIT INCHES / MM
W	31-1/8 / 790
D	27-9/16 / 700
H	7-7/8 / 200

Weight 42 lbs. / 19 kg
 External Finish Galvanized-steel Sheets
 Field Drainpipe Size O.D. 1-1/4" / 32 mm

Outdoor Unit

Compressor DC Inverter-driven
 MCA 12 A
 MOCF 15 A
 Fan Motor (ECM) 0.50 F.L.A.
 Sound Pressure Level
 Cooling 46 dB(A)
 Heating 50 dB(A)


DIMENSIONS	INCHES / MM
W	31-1/2 / 800
D	11-1/4 / 285
H	21-5/8 / 550

Weight 66 lbs. / 30 kg
 External Finish Munsell No. 3Y 7.8 / 1.1
 Refrigerant Type R410A
 Refrigerant Pipe Size O.D.
 Gas Side 3/8" / 9.52 mm
 Liquid Side 1/4" / 6.35 mm
 Max. Refrigerant Pipe Length 65' / 19 m
 Max. Refrigerant Pipe Height Difference 40' / 12 m
 Connection Method Flared

SEZ-KD09NA4** INDOOR FAN PERFORMANCE AND CORRECTED AIR FLOW CHARTS


SEZ-KD09NA4**

(External static pressure 0.02[in.WG](5P a)) 208/230V 60Hz

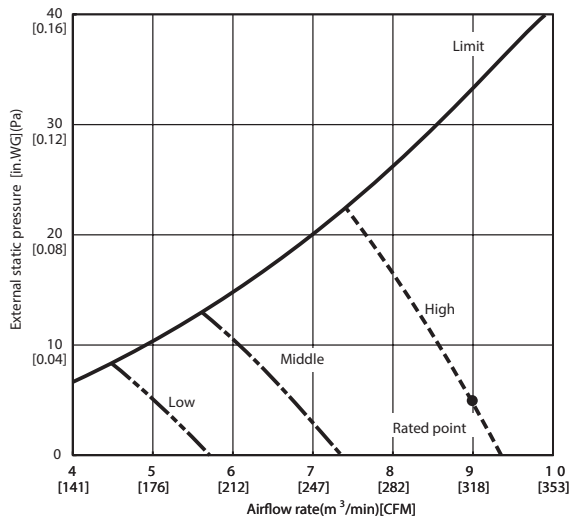


SEZ-KD09NA4**

(External static pressure 0.06[in.WG](15P a)) 208/230V 60Hz

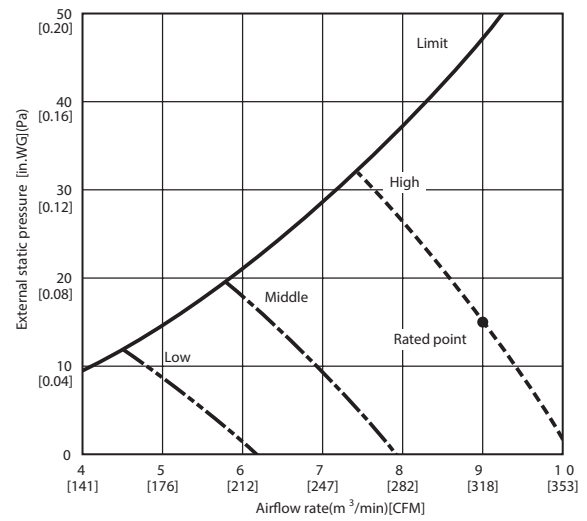


SEZ-KD09NA4**

(External static pressure 0.14[in.WG](35P a)) 208/230V 60Hz

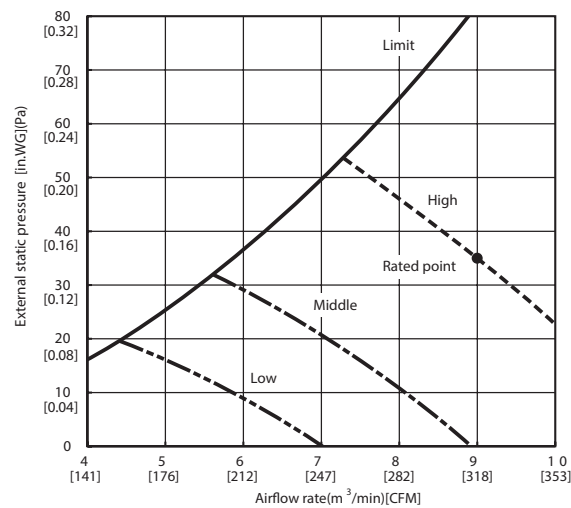


SEZ-KD09NA4**

(External static pressure 0.20[in.WG](50P a)) 208/230V 60Hz

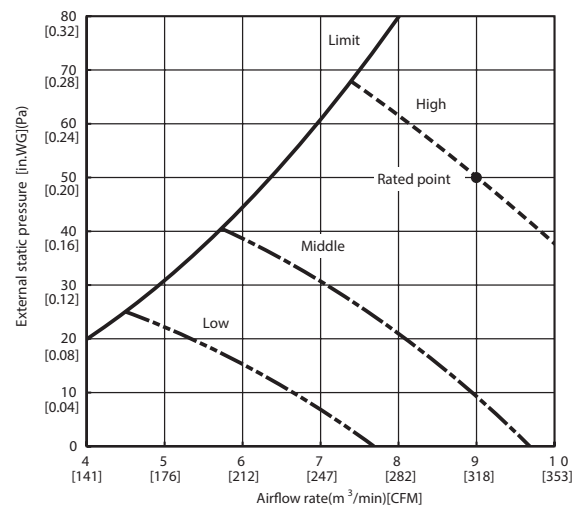

DIMENSIONS: SEZ-KD09NA4**

Unit : mm(in.)

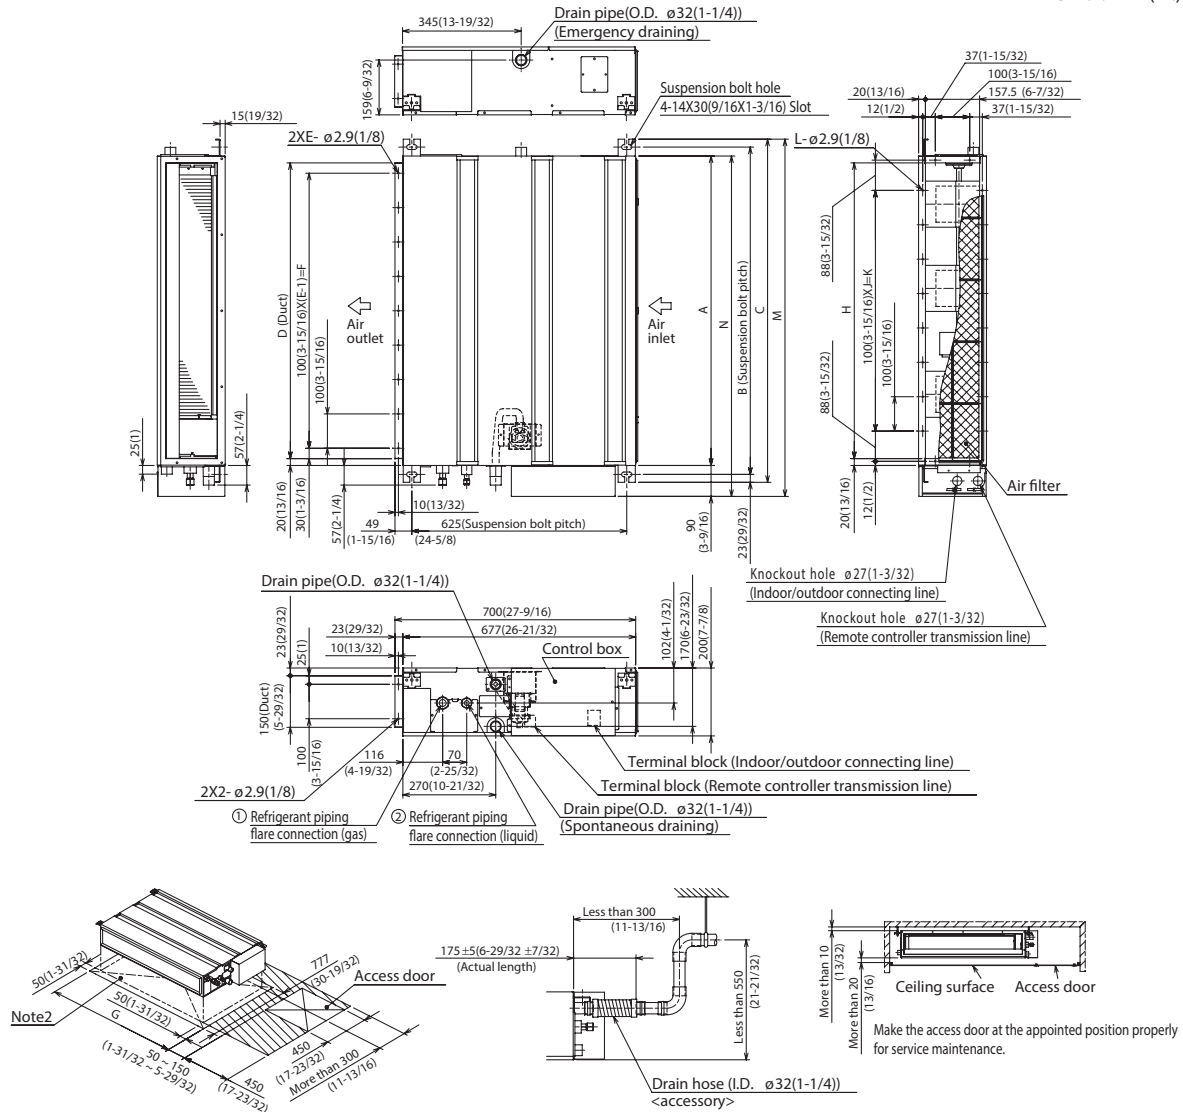


Required space for service and maintenance

Model	A	B	C	D	E	F	G	H	J	K	L	M	N	① Gas pipe	② Liquid pipe
SEZ-KD09NA4**	700 (27-9/16)	752 (29-5/8)	798 (31-7/16)	660 (26)	7	600 (23-5/8)	800 (31-1/2)	660 (26)	5	500 (19-11/16)	16	839 (33-1/16)	790 (31-1/8)	$\phi 9.52(3/8)$	$\phi 6.35(1/4)$
SEZ-KD12NA4**	900 (35-7/16)	952 (37-1/2)	998 (39-5/16)	860 (33-7/8)	9	800 (31-1/2)	1000 (39-3/8)	860 (33-7/8)	7	700 (27-9/16)	20	1039 (40-29/32)	990 (39)	$\phi 12.7(1/2)$	
SEZ-KD18NA4**	1100 (43-5/16)	1152 (45-3/8)	1198 (47-3/16)	1060 (41-3/4)	11	1000 (39-3/8)	1200 (47-1/4)	1060 (41-3/4)	9	900 (35-7/16)	24	1239 (48-25/32)	1190 (46-7/8)		


- Note1. Use M10 screw for the suspension bolt (field supply).
 Note2. Keep the service space for the maintenance at the bottom.
 Note3. This chart indicates for SEZ-KD15NA4** model, which has 3 fans.
 SEZ-KD09, 12NA4** models have 2 fans.
 SEZ-KD18NA4** models have 4 fans.
 Note4. In case an inlet duct is used, remove the air filter (supply with the unit), then install the filter (field supply) at suction side.

DIMENSIONS: SUZ-KA09NA

Unit: inch

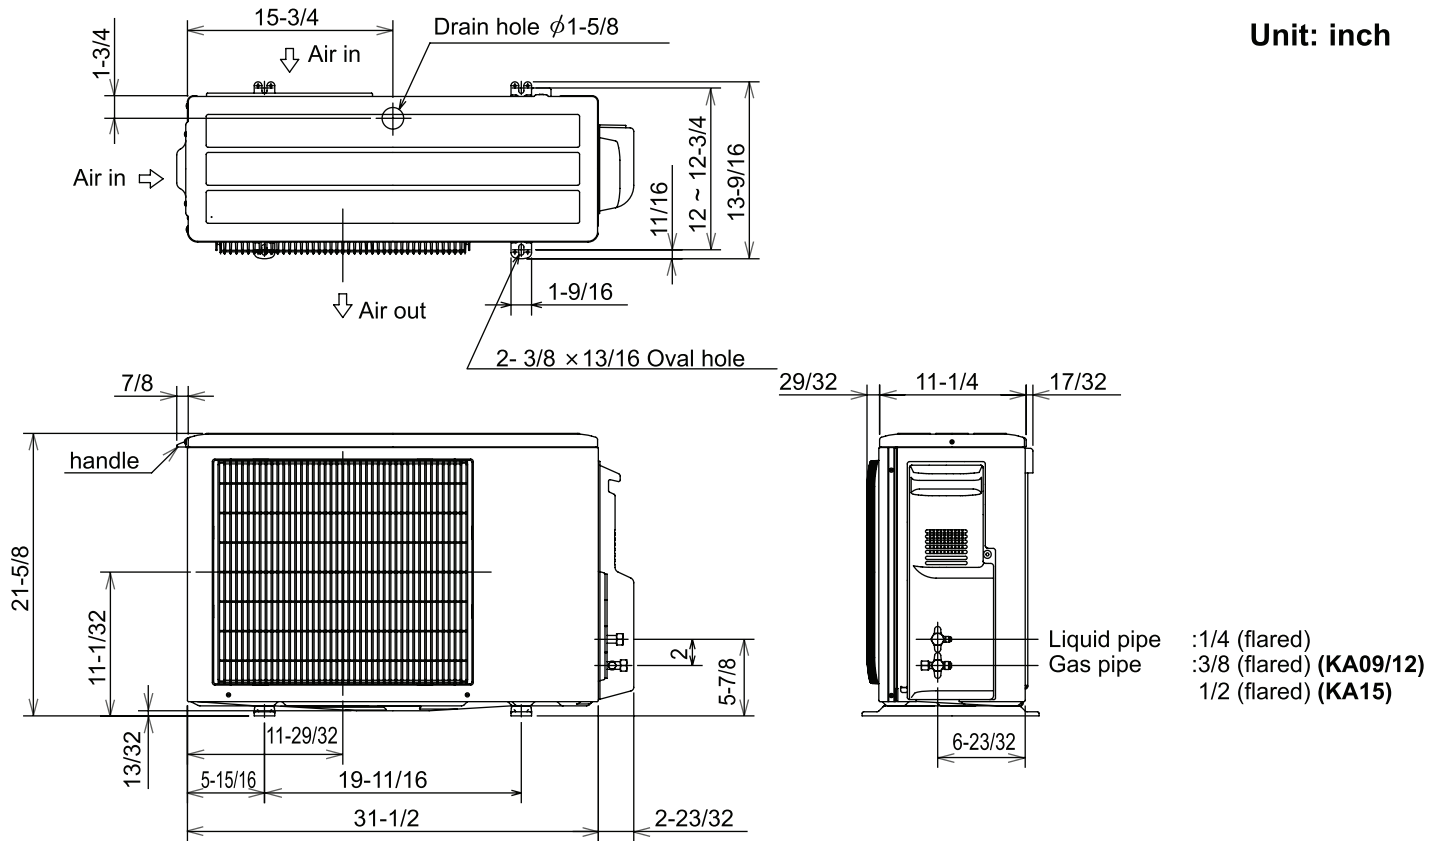

REQUIRED SPACE

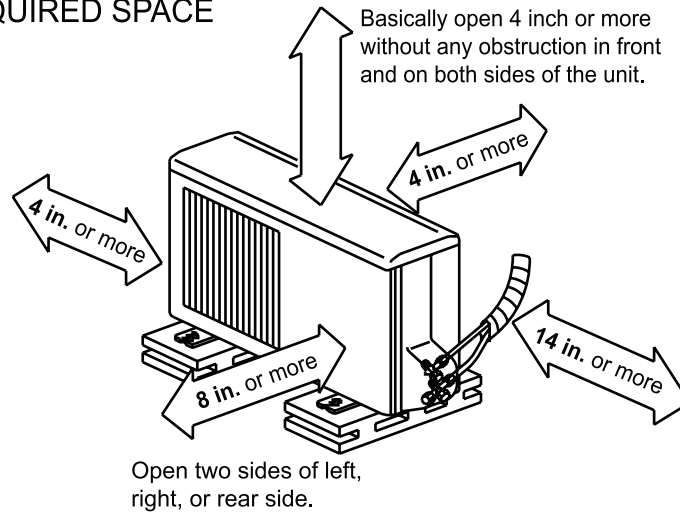

MITSUBISHI ELECTRIC
COOLING & HEATING

1340 Satellite Boulevard, Suwanee, GA 30024
Toll Free: 800-433-4822 www.mehvac.com