




# Zurn PEX® XL-Low Lead Brass Barb x Barb Lever Ball Valve - QQBV\_\_GX Specification Sheet

Tag \_\_\_\_\_

Dimensional Data: Inches and [mm] are subject to manufacturing tolerances and change without notice.

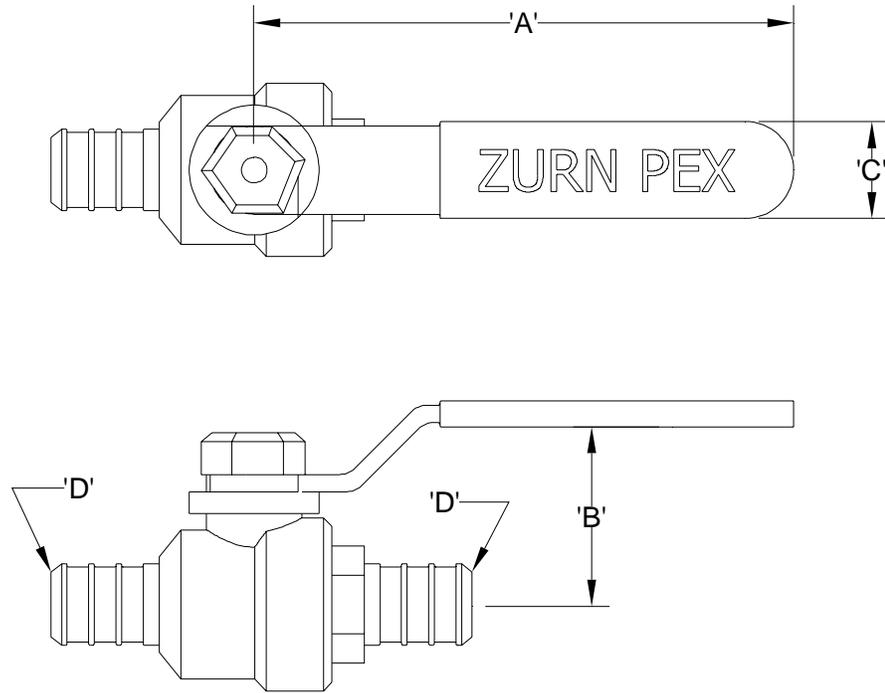

Part Number	Description	'A'	'B'	'C'	'D'
QQBV33GX	1/2" Barb x 1/2" Barb Lever Handle Ball Valve	2.75" [69.9]	1.13" [28.6]	0.55" [14.0]	1/2" Barb
QQBV44GX	3/4" Barb x 3/4" Barb Lever Handle Ball Valve	3.75" [95.3]	1.75" [44.5]	0.65" [16.5]	3/4" Barb
QQBV55GX	1" Barb x 1" Barb Barb Lever Handle Ball Valve	4.25" [108.0]	1.88" [47.6]	0.65" [16.5]	1" Barb

**Engineering Specification:** Zurn PEX® XL-Low Lead Brass Barb x Barb Lever Handle Ball Valve. Manufactured from EcoBrass®, C69300. These fittings, as a system with Zurn PEX® tube, are pressure rated at 160 PSI at 73°F, 100 PSI at 180°F, and 80 PSI at 200°F. These fittings are listed as complying with the following standards: NSF/ANSI Standard 61 including Annex G, CSA B137.5, and ASTM F1807.

### Accessories

- \_\_\_ QCLP3X 1/2" QuickClamp® Crimp Ring
- \_\_\_ QCLP4X 3/4" QuickClamp® Crimp Ring
- \_\_\_ QCLP5X 1" QuickClamp® Crimp Ring
- \_\_\_ QCR3X 1/2" Copper Crimp Ring
- \_\_\_ QCR4X 3/4" Copper Crimp Ring
- \_\_\_ QCR5X 1" Copper Crimp Ring
- \_\_\_ QSOET3X 1/2" Stainless Steel Crimp Ring
- \_\_\_ QSOET4X 3/4" Stainless Steel Crimp Ring
- \_\_\_ QSOET5X 1" Stainless Steel Crimp Ring

Rev. A	Date: 2/22/10	C.N. No. 110744
DWG. No. 84403		Prod. No. QQBV__GX