



### Features

- 1/2" threshold
- Solid Vikrell material
- Center drain
- Suitable for tile-down application
- Compatible with STERLING wall set (series 6205)
- Showers will comply with ICC ANSI A117.1 Standards section 1004.11.3.1.3.3 and the Fair Housing Act Accessibility Guidelines when installed per Requirement 6 (Reinforced walls for grab bars) of the Accessibility Guidelines. This applies to type A and B multifamily dwellings.



### ADA

### Codes/Standards



CSA B45.5/IAPMO Z124  
ASTM E162  
ASTM E662  
ADA


### Warranty – Bathing Fixtures (and) Kitchen and Utility Sinks Made of Solid Vikrell® Material

See website for detailed warranty information.

### Available Colors/Finishes

*Color tiles intended for reference only.*

Color	Code	Description
	0	White
	96	KOHLER Biscuit

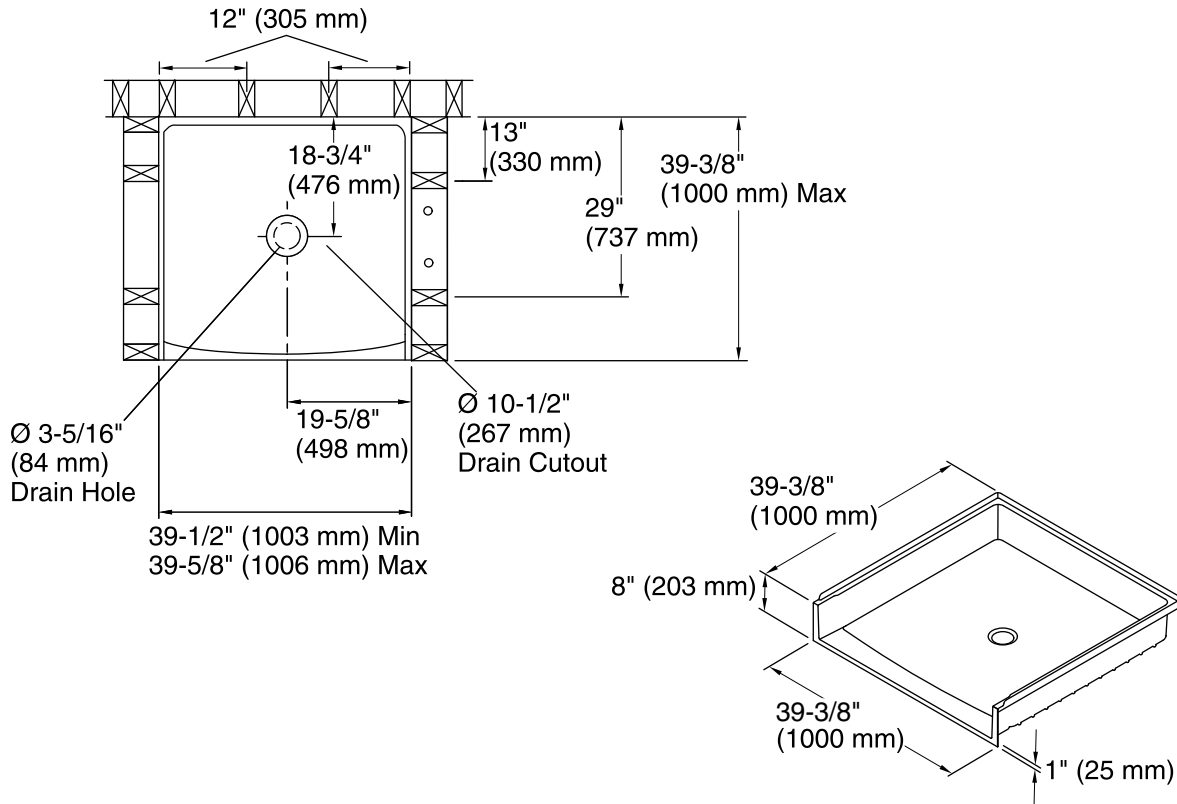

### Technical Information

All product dimensions are nominal.

Installation: Three-wall alcove

Drain location: Center

### Notes

Install this product according to the installation instructions.

1/2" minimum finished floor thickness required. Studs should be positioned roughly as shown. Drain cutout in subfloor to be 10-1/2" (267 mm) per rough-in illustration as shown to allow the backside of the drain to sit below the subfloor surface.

ADA compliant when installed to the specific requirements of these regulations.