


Submitted Model No.:

Specific Features:



▲ Designate proper finish suffix

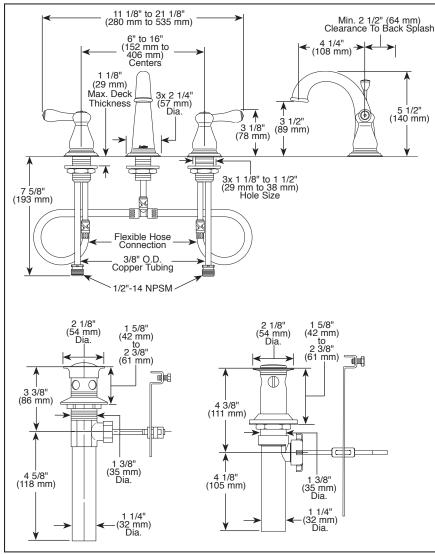

AVATORY FAUCETS

- Leland® Bath Collection
- Two Handle Widespread Deck Mount
- 3 Hole Sink Applications
- 6"-16" Centers
- Quick-Snap® Installation

STANDARD SPECIFICATIONS:

- Solid brass fabricated end valve and spout bodies.
- Widespread 6" (152 mm) to 16" (406 mm) centers.
- 4 1/4" (108 mm) long, 5 1/2" (140 mm) high, rigid spout.
- 1/4 turn handle stops.
- Hot and cold stems are interchangeable.
- Control mechanism is a rotating cylinder with stainless steel plate and 90° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 3/8" O.D. straight pex supply tubes with 1/2"-14 NPSM adapters.
- Models without suffix "MPU" have polypropylene pop-up type drain fitting with plated metal flange and stopper cap.
- Models with suffix "MPU" have metal drain with pop-up type fitting with plated flange and stopper.
- Maximum flow rate 1.5 gpm @ 60 PSI.
- Note: Standard mounting deck thickness can be extended 1" with RP10612.

WARRANTY

- Lifetime limited warranty on parts (other than electronic parts and batteries) and finishes: or, for commercial users, for 5 years from date of purchase.
- 5 year limited warranty on electronic parts (other than batteries); or, for commercial users, for 1 year from the date of purchase. No warranty is provided on batteries.







COMPLETE VALVE COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1
- ASME A112.18.2 / CSA B125.2

Indicates compliance to Indicates completed ICC/ANSI A117.1

- EPA WaterSense®
- "LF" models verified compliant with .25% weighted average Pb content regulations.

