

# Single Control Cast Lavatory Faucets

**TECK<sup>®</sup>**  
COMMERCIAL



### Specification: (example)

- **CAST BRASS** centerset faucet
  - Single control, 102mm (4") centers
  - Polished chrome plated finish
  - Ceramic cartridge with rotational limit stop
  - Metal hold-down package
  - Vandal resistant 89mm (3 1/2") ADA compliant lever handle with color index
- and ...  
with ... (add product variation required)  
with ... (add outlet required)

**22C101**



**22C601**

### Specification: (example)

- **CAST BRASS** single control lavatory faucet
- Single hole mount Metal hold-down package
- Polished chrome plated finish
- Ceramic cartridge with rotational limit stop
- Vandal resistant 89mm (3 1/2") ADA compliant lever handle with color index, and ... with ... (add product variation required) with ... (add outlet required)

### Engineer/Architect Approval

Model Specified:

Approval:

Date:

| DESCRIPTION                     | PRODUCT NO. |  |   |
|---------------------------------|-------------|--|---|
| Single Control Centerset Faucet | 22C         |  | 1 |



| PRODUCT VARIATION   | OUTLET   | HANDLE  |
|---|--|---|
| <b>0</b> 102mm (4") Centerset Less Pop-up (with Pop-up hole) <input type="checkbox"/>                 | <b>0</b> Vandal Resistant Outlet (Wrench Flats) 1.5 gpm (5.7 L/min.) <input type="checkbox"/>                      | <b>0</b> <input type="checkbox"/>   |
| <b>1</b> 102mm (4") Centerset Less Pop-up (No Pop-up hole) <input type="checkbox"/>                   | <b>1</b> <input type="checkbox"/>  | <b>1</b> 89mm (3-1/2") ADA Compliant Lever Handle <input checked="" type="checkbox"/> |
| <b>2</b> <input type="checkbox"/>   | <b>2</b> Vandal Resistant 1.5 gpm (5.7 L/min.) Laminar w/Agion <sup>®</sup> Antimicrobial <input type="checkbox"/> | <b>2</b> <input type="checkbox"/>   |
| <b>3</b> 102mm (4") Centerset with Metal Pop-up <input type="checkbox"/>                              | <b>3</b> Vandal Resistant 1.5 gpm (5.7 L/min.) Flow Control Aerator <input type="checkbox"/>                       | <b>3</b> <input type="checkbox"/>   |
| <b>4</b> 102mm (4") Centerset with Open Grid Strainer (No Pop-up hole) <input type="checkbox"/>       | <b>4</b> Standard 1.5 gpm (5.7 L/min.) Flow Control Aerator <input type="checkbox"/>                               | <b>4</b> <input type="checkbox"/>   |
| <b>5</b> 102mm (4") Centerset with ADA Offset Grid Strainer (No Pop-up hole) <input type="checkbox"/> | <b>5</b> Vandal Resistant 0.5 gpm (1.9 L/min.) Non-Aerating Spray Outlet <input type="checkbox"/>                  | <b>5</b> <input type="checkbox"/>   |
| <b>6</b> Single Hole Mount Less Pop-up (No Pop-up hole) <input type="checkbox"/>                      | <b>6</b> <input type="checkbox"/>  | <b>6</b> <input type="checkbox"/>   |
| <b>7</b> <input type="checkbox"/>   | <b>7</b> <input type="checkbox"/>  | <b>7</b> <input type="checkbox"/>   |
| <b>8</b> Single Hole Mount with Metal Pop-up <input type="checkbox"/>                                 | <b>8</b> <input type="checkbox"/>  | <b>8</b> <input type="checkbox"/>   |
| <b>9</b> Single Hole Mount with Open Grid Strainer (No Pop-up hole) <input type="checkbox"/>          | <b>9</b> Vandal Resistant 0.35 gpm (1.32 L/min.) Non-Aerating Spray Outlet <input type="checkbox"/>                | <b>9</b> <input type="checkbox"/>   |

Refer to [www.specselect.com](http://www.specselect.com) for individual models.

Flow Rates are at 60 PSI.  
Note: Use this page front and back as a product submittal sheet.


Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or [www.specselect.com](http://www.specselect.com) for finish options and product availability.

DSP-22C Rev. F

**Approvals:**

- CSA certified
- Complies to ASME A112.18.1/CSA B125.1
- Complies to ASME A112.18.6 for Flex Connector Models
- Indicates compliance to ICC/ANSI A117.1
- Verified compliant with 0.25% weighted average Pb content regulations

(Contact Delta Representative for State and/or Local Approvals.)

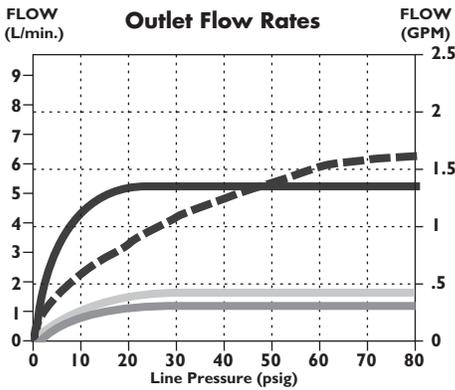
**FLOW RATE vs PRESSURE**

**Spout Outlets**

- No. 0 & 2 Outlet
- No. 3 & 4 Aerator
- No. 5 Outlet
- No. 9 Outlet

| OUTLET NO. | "D" |      |
|------------|-----|------|
|            | mm  | in.  |
| 0          | 7   | 0.28 |
| 2          | 11  | 0.45 |
| 3          | 11  | 0.45 |
| 4          | 11  | 0.45 |
| 5          | 11  | 0.45 |
| 9          | 11  | 0.45 |

Note: Measurements may vary ± 6mm (0.25")

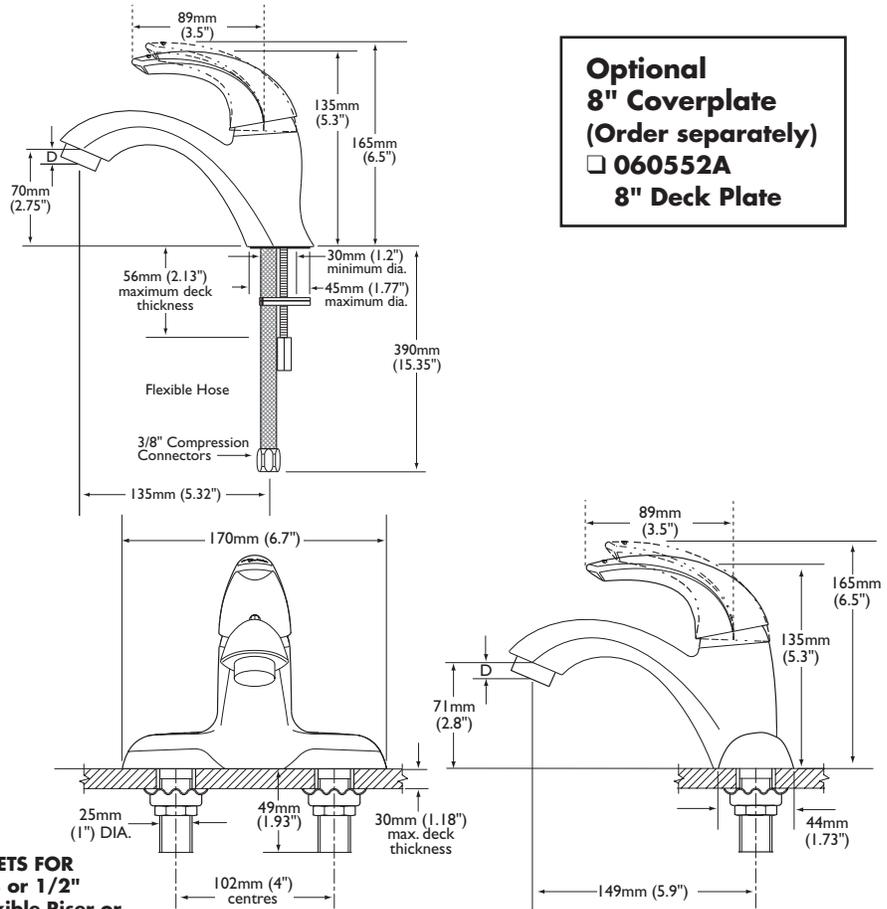
Refer to [www.specselect.com](http://www.specselect.com) for individual models.




**Optional  
8" Coverplate  
(Order separately)**  
 **060552A  
8" Deck Plate**

**INLETS FOR  
3/8 or 1/2"  
Flexible Riser or  
1/2 - 14 NPSM  
Coupling Nuts  
(Not supplied)**


**METAL POP-UP**  
(supplied with Product Variation 3 and 8)

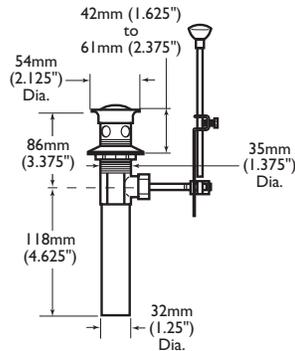

**OPEN GRID STRAINER**  
(supplied with Product Variation 4 and 9)

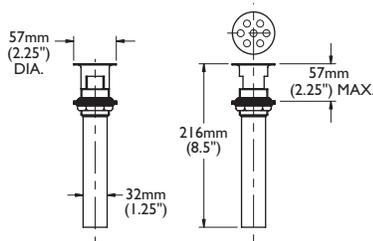

**OFFSET OPEN GRID STRAINER**  
(supplied with Product Variation 5)

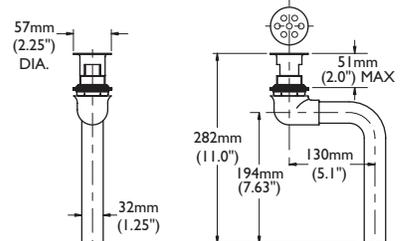

Note: Use this page front and back as a product submittal sheet.