

# ELKAY® SPECIFICATIONS

## Freeze-Resistant Two-Level Drinking Fountain Soft Sides®, Wall Mount Fully Exposed with Wall Plate, Barrier-Free Access ANSI/NSF61 Compliant – Model EDFP217FPK

### GENERAL

Two-level wall mounted freeze-resistant drinking fountain for all weather applications. Constructed of #18 gauge, type 304, stainless steel polished to a satin finish. Includes two freeze-resistant boxes, LKFRB1, to be mounted on interior heated wall where the temperature does not drop below 50°F (10°C).

Contoured basins minimize splashing with vandal-resistant bubblers keyed into position to prevent rotation. Heavy-duty push-button controls are vandal-resistant.

### ADA COMPLIANT


**THIS DRINKING FOUNTAIN COMPLIES WITH THE REQUIREMENTS OF A.D.A. (AMERICANS WITH DISABILITIES ACT) WHEN PROPERLY INSTALLED. UNIT IS COMPLIANT IF INSTALLED IN AN ALCOVE AND IS ALSO COMPLIANT WHEN MOUNTED ON AN EXPOSED WALL IF A WING WALL IS LOCATED ON THE LEFT SIDE OR IF A 97258C APRON IS INSTALLED UNDER THE UPPER UNIT.**

### NO LEAD DESIGN

**THIS DRINKING FOUNTAIN COMPLIES WITH THE LEAD-FREE DEFINITION IN THE SAFE DRINKING WATER ACT OF 1986 AND LEAD CONTAMINATION CONTROL ACT OF 1988.**

Elkay Drinking Fountains are manufactured with a waterway system utilizing copper components and completely lead-free material. These waterways have no lead because all leaded materials, such as leaded brass, have been removed.

This fountain is certified by WQA to lead-free compliance including NSF/ANSI 61-ANNEX G, AB 1953.

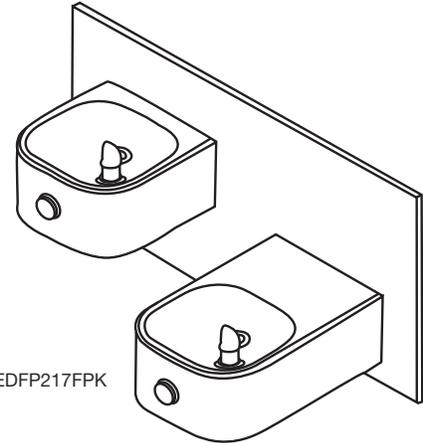

Model EDFP217FPK



### ACCESSORIES

- MP20 Surface mounting plate.
- MPW200 In-wall carrier mounting plate.
- ML100 Support columns for MPW200.

### CONSTRUCTION

**EDFP217FPK** furnished complete with vandal-resistant bubblers, heavy-duty push-buttons and vandal-resistant bottom cover plates.

**LKFRB1** includes boxes with separate front louvered panels. Flow regulator provides constant stream from 20 to 105 psi water pressure. Operated by adjustable cable system. Traps and drain tubes included for proper installation. Two boxes are required.

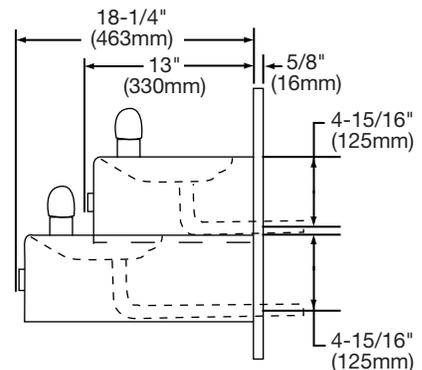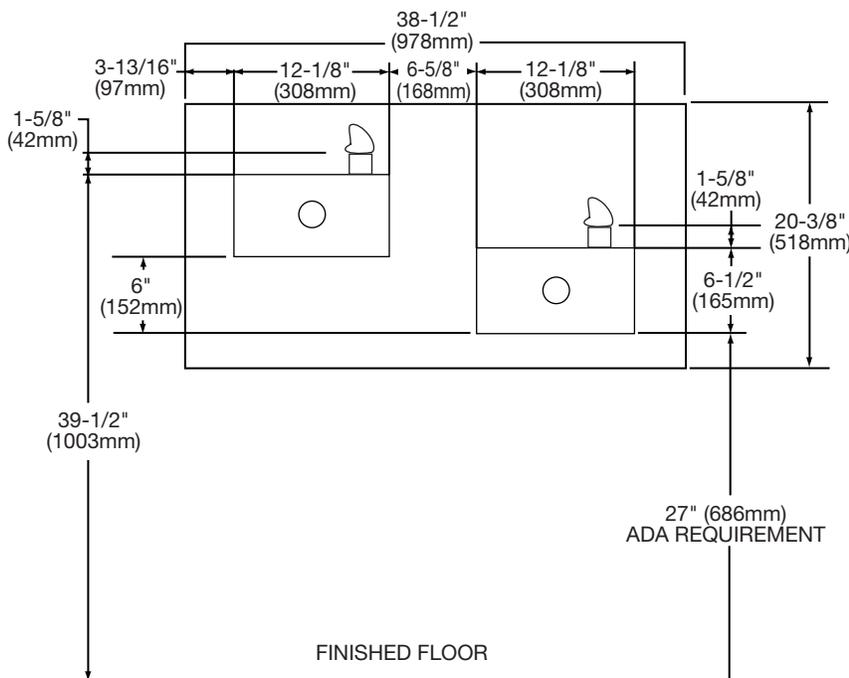

*In keeping with our policy of continuing product improvement, Elkay reserves the right to change product specifications without notice. Please visit [elkayusa.com](http://elkayusa.com) for most current version of Elkay product specification sheets.*

*This specification describes an Elkay product with design, quality and functional benefits to the user. When making a comparison of other producers' offerings, be certain these features are not overlooked.*



**Freeze-Resistant Two-Level Drinking Fountain  
Soft Sides®, Wall Mount Fully Exposed  
with Wall Plate, Barrier-Free Access  
ANSI/NSF61 Compliant – Model EDPF217FPK**

**ELKAY®**  
**ROUGH-IN DIMENSIONS**

**INSTALLER NOTE**

THIS DRINKING FOUNTAIN IS FURNISHED WITH A BUBBLER AND WATERWAY WITH ALL CONNECTING FITTINGS WHICH ARE MANUFACTURED OF COMPLETELY LEAD FREE MATERIAL. SHUT OFF VALVE (NOT FURNISHED) TO ACCEPT 3/8" O.D. UNPLATED COPPER TUBE.


**OPERATION OF QUICK CONNECT FITTINGS**

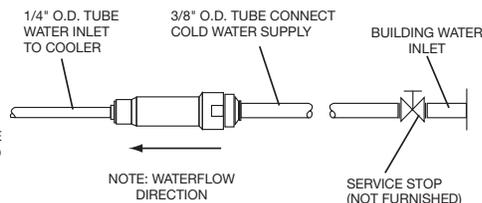

PUSHING TUBE IN BEFORE PULLING IT OUT HELPS TO RELEASE TUBE

NOTE: WATERFLOW DIRECTION

SERVICE STOP (NOT FURNISHED)

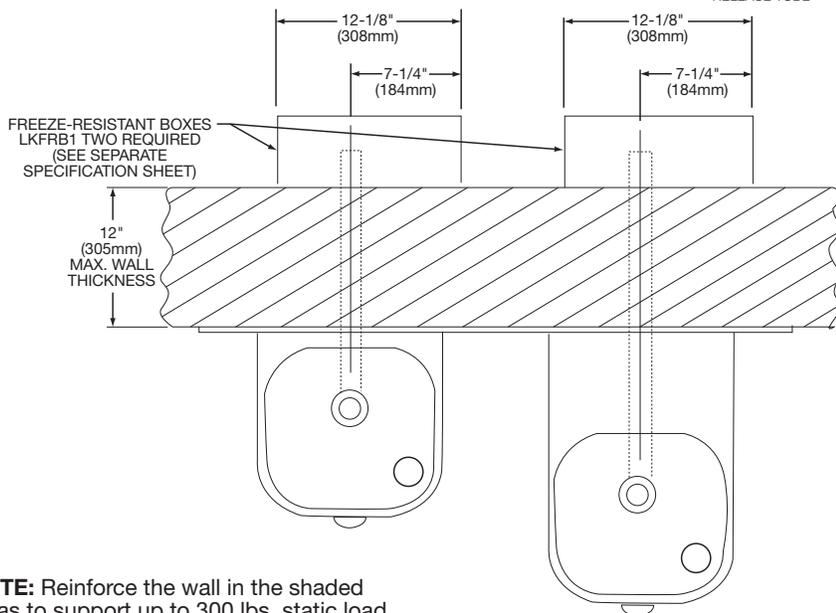

**WARNING:** The freeze-resistant box must be installed on an interior heated wall where the temperature does not drop below 50°F (10°C). The front of the box must have unobstructed air flow. Failure to maintain the interior wall temperature and the inside of the freeze-resistant box above 50°F (10°C) can result in damage to the box which could result in unrestricted water flow.

**NOTE:** When using MP20 Surface Mounting Plate, remove the wall hanger and back panel channels. See separate specification sheet for details on MP20 Surface Mounting Plate.

**NOTE:** Reinforce the wall in the shaded areas to support up to 300 lbs. static load.

**WALL ROUGH-IN**

