

# Features

- Project pack: Supplied 12 per case.
- Includes face plate with handle, shower arm with flange and showerhead.
- Single handle controls both on/off activation and temperature setting.
- Supplied with ADA compliant metal lever handle.
- Includes single function 2.5 gpm (9.5 l/min) showerhead.
- Showerhead features MasterClean<sup>™</sup> sprayface for easy cleaning.
- Complements the Coralais faucet and accessory collections.

## Material

- Premium material construction with metal handle ensures reliability and durability.
- KOHLER finishes resist corrosion and tarnishing.
- KOHLER finishes resist corrosion and tarnishing.

# Installation

• Trim set requires valve to complete installation.

# **Required Products/Accessories**

K-304/K-P304 Series Rite-Temp® Valves or

K-8304/K-P8304 Series Rite-Temp ${\ensuremath{\mathbb R}}$  Valve & Cartridge Kits or

K-8300/K-P8300 Series Rite-Temp® Valve Body Rough-ins K-8305/K-P8305 Series Rite-Temp® Cartridges

or

K-2971-KS 3/4" Pressure-balancing Valve

## **Optional Products/Accessories**

K-10350 Deep Rough-In Kit For K-8305 Cartridges K-10351 Test Cap For K-8300 Series Valve Bodies



Rite-Temp® Shower Valve Trim



# Codes/Standards

ASME A112.18.1/CSA B125.1 DOE - Energy Policy Act 1992

# KOHLER<sup>®</sup> Faucet Lifetime Limited Warranty

See website for detailed warranty information.

# **Available Colors/Finishes**

Color tiles intended for reference only.

#### Color Code Description



CP Polished Chrome




# **Coralais**®

K-PS15611-4

# KOHLER. Faucets

# Coralais® Rite-Temp® Shower Valve Trim K-PS15611-4

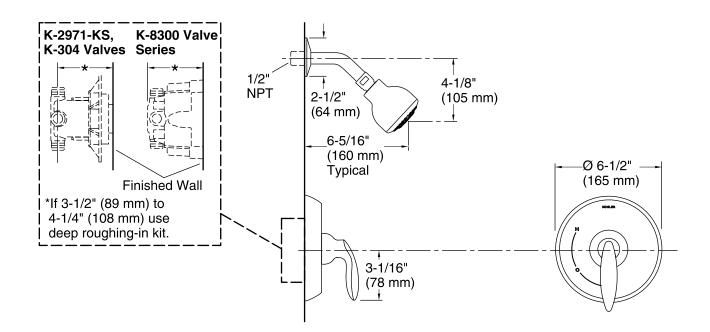

## **Technical Information**

All product dimensions are nominal.

#### Showerhead/Body Spray:

Rated maximum flow: 2.5 gal/min (9.5 l/min) Pressure: 80 psi (5.5 bar)

#### Notes

Install this product according to the installation guide.

NOTICE: Risk of product damage. Long screws for installing trim can damage the K-2971-KS valve. Consult the trim installation guide to verify if the thin wall installation kit (88526) is needed.

