

► Code Number

3780534

► Description

Exposed Service Sink Flushometer for use with top spud Service Sinks.

► Flush Cycle

6.5 gpf / 24.6 Lpf

► Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated Service Sink Flushometer with the following features:

- High Chloramine Resistant PERMEX® Synthetic Rubber Diaphragm with Linear Filtered Bypass and Vortex Cleansing Action™
- 1" I.P.S. Screwdriver Bak-Chek® Angle Stop with Vandal Resistant Stop Cap
- Vacuum Breaker with Flush Connection
- Spud Coupling and Spud Flange for 1½" Top Spud
- Sweat Solder Adapter with Cover Tube and Cast Wall Flange
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation

Diaphragm, Handle Packing and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance

- ADA Compliant Metal Oscillating Non-Hold-Open Handle

► Variations

W - ¾" Flush Connection

2" Offset Vacuum Breaker


H - Inlet on front of valve

► Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories



Model 117 shown

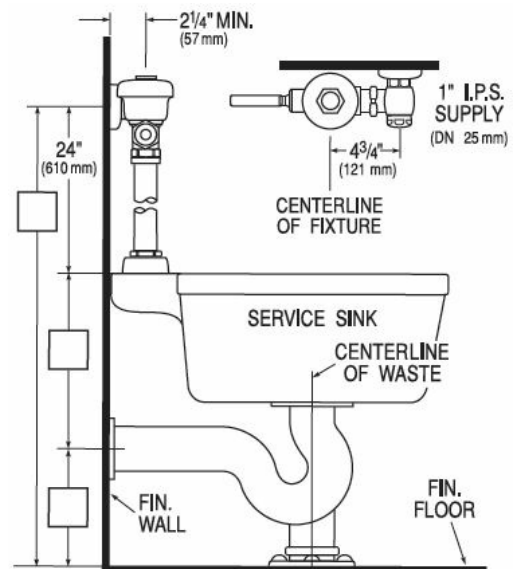

Model 117 shown

► Disclaimer

All information contained within this document subject to change without notice.

► Compliance & Certifications



Made In The
USA



This space for Architect/Engineer Approval