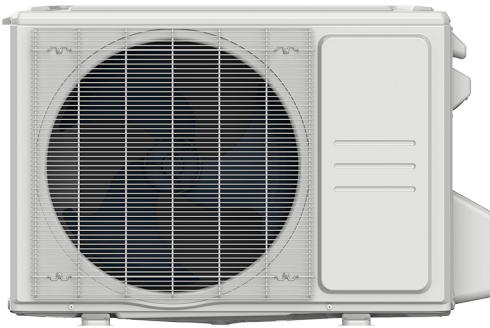


PREMIER SERIES**12,000 BTU****BZ33-HYP12WALL2-G2-P****BZ33-HYP12OUT2-G2-P****FEATURES**

- Two-way draining
- Heating operation down to -22°F
- Low ambient cooling down to -22°F
- Golden Fin anti-corrosive coating
- Auto restart function
- Crank case & basepan heater included
- Auto defrost
- 24-Hour timer
- Wireless remote control included
- 208/230V, single phase
- Compatible with BZ33-WCON1 and BZ33-WCON1-G2

TWO-WAY DRAINING

Piping, drainage, and connections are able to be installed on the right and left sides.

FOLLOW ME MODE

Senses indoor temperature at handheld remote or Breeze33 wired controller, rather than at the indoor equipment.

GOLDEN FIN COATING

Prevents corrosive build-up and improves efficiency while protecting the condenser from harsh weather and elements.

AUTO DEFROST

In low temperatures, the auto defrost feature will keep the evaporator from freezing.

AUTO RESTART

In the event of a power failure, the unit will remember and restart the previous settings when power returns.

24-HOUR TIMER

Preset the unit to automatically turn on or off.



INDOOR/OUTDOOR HYPER PRO MINI SPLIT SYSTEM

UNIT	ID NO.	MODEL
Indoor	.3548020	BZ33-HYP12WALL2-G2-P
Outdoor	.3548025	BZ33-HYP12OUT2-G2-P

SPECIFICATIONS

Series	Premier
Thermostat Type	Wireless Remote
Warranty	Yes*

COOLING

Capacity (Range)	BTU/H	12,000 (3,300 - 14,300)
Input	W	857
Rated Current	A	3.72
EER	BTU/W	14
SEER	BTU/W	25.5

HEATING

Capacity (Range)	BTU/H	12,000 (5,000 - 15,300)
Input	W	907
Rated Current	A	4.1
COP	W/W	3.88
HSPF4	BTU/W	13
HSPF5	BTU/W	10.5

COMPRESSOR

Type	Dual Rotary	
Capacity	BTU/H	11,822.6
Input	W	885
Rated Current (RLA)	A	—
Refrigerant Oil/Charge	mL	—

REFRIGERANT PIPE

Design Pressure	PSIG	550 / 340
Refrigerant Type	Oz	R410A
Refrigerant Precharge	Ft	25
Additional Charge/Ft	Oz	0.16
Liquid	In	1/4
Gas	In	1/2
Max. Refrigerant Pipe Length	Ft	82
Max. Difference in Level	Ft	32-4/5

*5 year warranty on parts. 7 year warranty on compressor.

OPERATING TEMPERATURE

Indoor (Cooling/Heating)	°F	60~90 / 32~86
Outdoor (Cooling/Heating)	°F	-22~122 / -22~86

INDOOR FAN MOTOR

Input	W	50
Output	W	—
RLA	A	0.41
Speed (High/Med/Low)	r/min	1,050 / 930 / 870
Air Flow (High/Med/Low)	CFM	335.3 / 229.4 / 176.5
Noise Level (High/Med/Low)	dBA	38 / 33.5 / 23.5

INDOOR UNIT DIMENSIONS

Product (W x D x H)	In	31-5/16 x 8-7/8 x 11-5/8
Packing (W x D x H)	In	34-1/4 x 14-5/8 x 12
Weight (Net/Gross)	Lbs	22.9 / 28.9

OUTDOOR FAN MOTOR

Input	W	—
Output	W	—
RLA	A	15
Speed	r/min	850 / 680 / 450
Air Flow	CFM	1,323.5
Noise Level	dBA	56

OUTDOOR UNIT DIMENSIONS

Product (W x D x H)	In	31-11/16 x 13 x 21-7/8
Packing (W x D x H)	In	36 x 14-5/8 x 24-3/16
Weight (Net/Gross)	Lbs	73.6 / 79.4

ELECTRICAL DATA

Min. Circuit Ampacity	A	15
Max. Fuse	A	15
Connection Wiring		14*4 AWG
Power Supply	Ph/V/Hz	1 / 208/230 / 60



WALL MOUNTS - COMFORT SERIES

Indoor Unit	HP09WALL1-G2-C*	HP12WALL1-G2-C*	HP18WALL2-G2-C*	HP24WALL2-G2-C*	HP30WALL2-G2-C*	HP36WALL2-G2-C*
Outdoor Unit (Single-Zone)	HP09OUT1-G2-C*	HP12OUT1-G2-C*	HP18OUT2-G2-C*	HP24OUT2-G2-C*	HP30OUT2-G2-C*	HP36OUT2-G2-C*

WALL MOUNTS - PREMIER SERIES

Indoor Unit	HYP06WALL2-G2-P	HYP09WALL2-G2-P*	HYP12WALL2-G2-P*	HYP18WALL2-G2-P*	HYP24WALL2-G2-P*	HYP30WALL2-G2-P	HYP36WALL2-G2-P
Outdoor Unit (Single-Zone)	HYP06OUT2-G2-P	HYP09OUT2-G2-P*	HYP12OUT2-G2-P*	HYP18OUT2-G2-P*	HYP24OUT2-G2-P*		
Outdoor Unit (Multi-Zone)	HP182Z2-G2-P*						
	HP273Z2-G2-P*						
	HP364Z2-G2-P*						
	HP485Z2-G2-P*						
	HYP182Z2-G2-P*						
	HYP273Z2-G2-P*						
	HYP364Z2-G2-P*						
	HYP485Z2-G2-P*						

WALL MOUNT - PREMIER SERIES

Indoor Unit	HYP33WALL2-G2-P
Outdoor Unit (Single-Zone)	HYP33OUT2-G2-P

CEILING CASSETTES

Indoor Unit	CASS09-P	CASS12-P	CASS18-P	CASS24-G2-P*	CASS36-G2-P
Outdoor Unit (Single-Zone)	HYP09OUT2-G2-P*	HYP12OUT2-G2-P*	HYP18OUT2-G2-P*	HYP24OUT2-G2-P*	HYP36OUT2-G2-P
Outdoor Unit (Multi-Zone)	HP182Z2-G2-P*				
	HP273Z2-G2-P*				
	HP364Z2-G2-P*				
	HP485Z2-G2-P*				
	HYP182Z2-G2-P*				
	HYP273Z2-G2-P*				
	HYP364Z2-G2-P*				
	HYP485Z2-G2-P*				

CEILING & FLOOR MOUNTS

Indoor Unit	IFMU18-P	IFMU24-G2-P	IFMU36-G2-P	IFMU48-G2-P
Outdoor Unit (Single-Zone)	HYP18OUT2-G2-P*	HYP24OUT2-G2-P*	HYP36OUT2-G2-P	HYP48OUT2-G2-P
Outdoor Unit (Multi-Zone)	HP273Z2-G2-P*			
	HP364Z2-G2-P*			
	HP485Z2-G2-P*			
	HYP273Z2-G2-P*			
	HYP364Z2-G2-P*			
	HYP485Z2-G2-P*			

DUCTED

Indoor Unit	DIDU9-P	DIDU12-P	DIDU18-P	DIDU24-P	DIDU36-P	DIDU48-P
Outdoor Unit (Single-Zone)	HYP09OUT2-G2-P*	HYP12OUT2-G2-P*	HYP18OUT2-G2-P*	HYP24OUT2-G2-P*	HYP36OUT2-G2-P	HYP48OUT2-G2-P
Outdoor Unit (Multi-Zone)	HP182Z2-G2-P*					
	HP273Z2-G2-P*					
	HP364Z2-G2-P*					
	HP485Z2-G2-P*					
	HYP182Z2-G2-P*					
	HYP273Z2-G2-P*					
	HYP364Z2-G2-P*					
	HYP485Z2-G2-P*					

ONE-WAY CASSETTES

Indoor Unit	OWCASS09-G2-P	OWCASS12-G2-P	OWCASS18-G2-P
Outdoor Unit (Single-Zone)	HYP09OUT2-G2-P*	HYP12OUT2-G2-P*	HYP18OUT2-G2-P*
Outdoor Unit (Multi-Zone)	HP182Z2-G2-P*		
	HP273Z2-G2-P*		
	HP364Z2-G2-P*		
	HP485Z2-G2-P*		
	HYP182Z2-G2-P*		
	HYP273Z2-G2-P*		
	HYP364Z2-G2-P*		
	HYP485Z2-G2-P*		

AIR HANDLERS

Indoor Unit	MSAHU18-G2-P	MSAHU24-G2-P*	MSAHU36-G2-P	MSAHU48-G2-P
Outdoor Unit (Single-Zone)	HYP18OUT2-G2-P*	HYP24OUT2-G2-P*	HYP36OUT2-G2-P	HYP48OUT2-G2-P
Outdoor Unit (Multi-Zone)	HP273Z2-G2-P*			
	HP364Z2-G2-P*			
	HP485Z2-G2-P*			
	HYP273Z2-G2-P*			
	HYP364Z2-G2-P*			
	HYP485Z2-G2-P*			

CONSOLES

Indoor Unit	ICM12-G2-P
Outdoor Unit (Single-Zone)	HYP12OUT2-G2-P*
Outdoor Unit (Multi-Zone)	HP182Z2-G2-P*
	HP273Z2-G2-P*
	HP364Z2-G2-P*
	HP485Z2-G2-P*
	HYP182Z2-G2-P*
	HYP273Z2-G2-P*
	HYP364Z2-G2-P*
	HYP485Z2-G2-P*

* Available in G1 and G2 models.
All G2 models are backwards compatible excluding Air Handler units.