



Model	ID	Size	Chamber Width	Chamber Vol.
S33-WHA34	.3527251	3/4" x 3/4"	.78"	1"³

SUBMITTAL SHEET

PROJECT INFORMATION

Job Name:

Location:

Engineer:

Contractor:

P.O. Number:

Representative:

MODELS

☐ S33-WHA34

DESCRIPTION

To protect against potentially harmful and damaging effects of water hammers, use a Stream33 Water Hammer Arrestor. These absorb the shock when flowing water suddenly stops as a result of fast closing shut-off valves.

FEATURES


- Cold-rolled, spun closed seamless chamber end
- Pressurized air cushion
- Lead-free solder joint

OPERATING SPECIFICATIONS

- Maximum temperature rating: 220°F
- Max operating pressure: 250 PSI

APPROVALS

- ASSE 1010
- cUPC

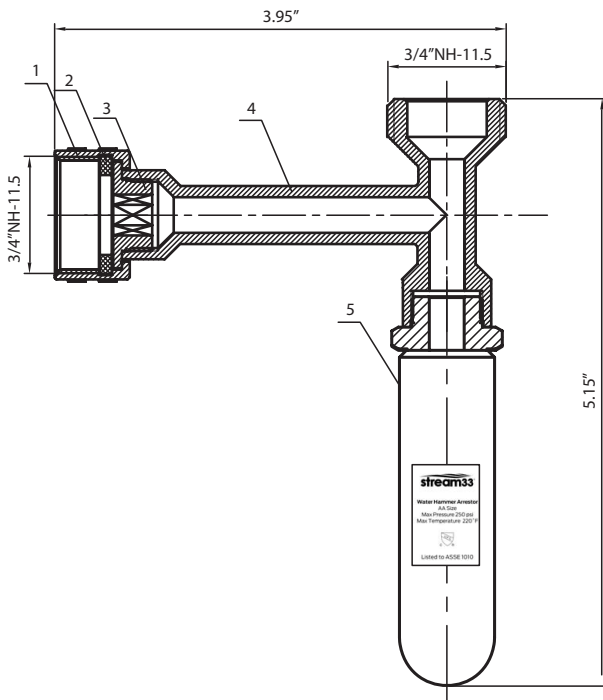

MATERIAL SPECIFICATIONS		
1	Nut	Brass
2	Washer	EP7118F
3	Fitting	C46500
4	Body	C46500
5	Hammer Arrestor	C46500+SUS304