




Model	ID	Size	Chamber Width	Chamber Vol.
S33-WHA38	.3527253	3/8" x 3/8"	.78"	1"³

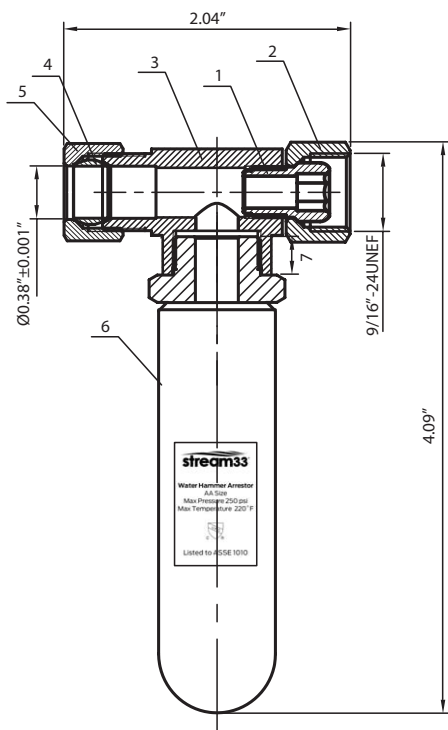

## SUBMITTAL SHEET

### PROJECT INFORMATION

Job Name:

Location:

Engineer:

Contractor:

P.O. Number:

Representative:

### MODELS

☐ S33-WHA38

### DESCRIPTION

To protect against potentially harmful and damaging effects of water hammers, use a Stream33 Water Hammer Arrestor. These absorb the shock when flowing water suddenly stops as a result of fast closing shut-off valves.

### FEATURES

- Cold-rolled, spun closed seamless chamber end
- Pressurized air cushion
- Lead-free solder joint

### OPERATING SPECIFICATIONS

- Maximum temperature rating: 220°F
- Max operating pressure: 250 PSI

### APPROVALS

- ASSE 1010
- cUPC

MATERIAL SPECIFICATIONS		
1	Hearts	C46500
2	Nut	Brass
3	Body	C46500
4	Clip	H62
5	Nut	Brass
6	Hammer Arrestor	C46500+SUS304