

Project: _____

Dealer: _____

Architect: _____




Engineer: _____

Contractor: _____

Location: _____

Suppliers: _____

Date: _____

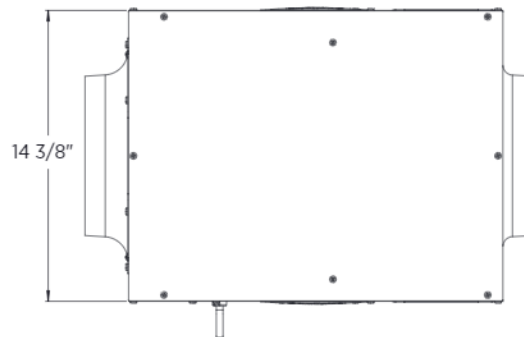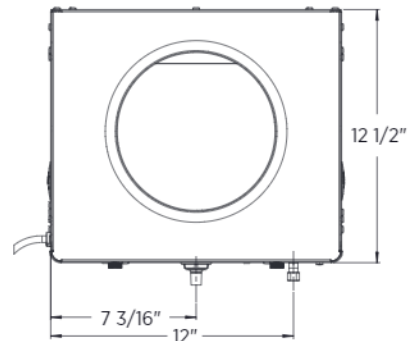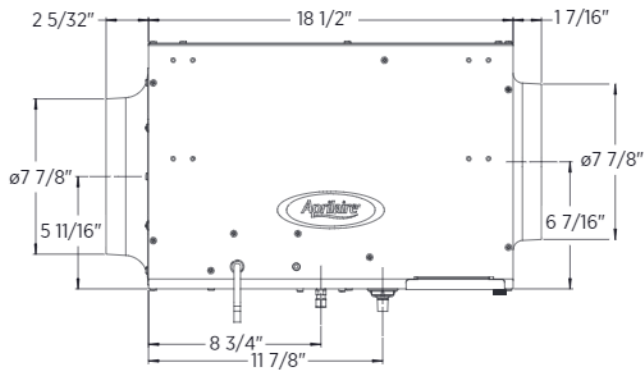

Capacity:	13 gpd in homes up to 3,500 sq ft with tight construction*	Electric Characteristics:	
Water Feed Rate(gph):	6	• Solenoid Valve:	24VAC
Required Water Temperature:	120°F to 140°F	• Control Voltage:	24VAC
Minimum Supply Air Temperature:	65°F	• Primary Voltage:	120VAC/1 phase/60HZ
Ambient Temperature Operating Range:	65°F - 120°F	Cabinet Construction:	20 Gauge, Galvannealed Cold Rolled Steel
		Cabinet Finish Color:	Gray
		Shipping Weight:	38.25 lbs.

*Based on AHRI Guideline F Humidifier Sizing. Can satisfy a 2,000 sq ft home with average construction.

The submittal is intended to show general, overall product dimensions and provide guidance for installation clearance. Drawings are not to scale. Ensure submittals are current. Research Products reserves the rights to make product change without notifications or obligations.