

**For Residential and Commercial Applications**

Job Name		Engineer / Architect	
Job Location		Wholesaler	
Submittal Date		Contractor	

## HUS-12 Garden Hose Swivel Union – Female Hose Thread

**Use:** For use with residential and commercial grade garden hose. All female hose thread connections require a rubber washer (Items SF0741 and SFB0741 sold separately) inserted prior to installation.

**Operating Specifications:**


**Temperature:** -35° - 100°F  
**Working Pressure:** 75 PSI maximum, intermittent to 150 PSI

**Standard**

FITTING MATERIAL SPECIFICATIONS	
<b>Body</b>	Brass

**Low-lead**

FITTING MATERIAL SPECIFICATIONS	
<b>Body</b>	Low-lead brass

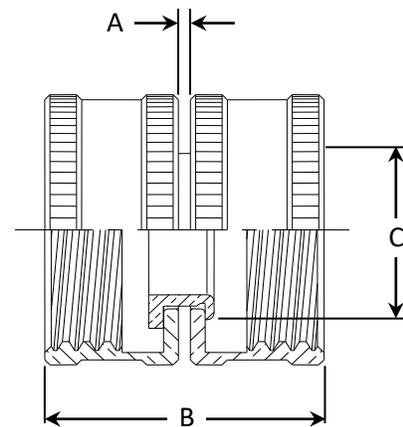

**Standard Part Listing:**

- HUS-12                    3/4" female hose thread x 3/4" female hose thread, swivel, rough brass
- HUS-12 B                 3/4" female hose thread x 3/4" female hose thread, swivel, rough brass, bulk

**Low-lead Part Listing:**

- HUS-12X                 3/4" female hose thread x 3/4" female hose thread, swivel, rough brass
- HUS-12X B             3/4" female hose thread x 3/4" female hose thread, swivel, rough brass, bulk

PART DIMENSIONS (Inches)			
Model	DIM. A	DIM. B	DIA. C
HUS-12	.05	1.17	.80
HUS-12-1	.05	1.17	.80

This specification and all information contained herein is the confidential and exclusive property of BrassCraft Manufacturing Company and shall not be disclosed to others without the written consent of BrassCraft. This specification must be returned to BrassCraft if requested.

