

SUPPLY

DRAINAGE

SUPPORT

TESTING

SPECIALTIES

TOOLS

ACCESS


Stub Out Elbow

Standard Square-O Strap

- Accepts sweat and compression stop valves
- Combines the easy installation of CPVC with the strength and versatility of copper
- Spin closed ends are guaranteed leakproof
- Type L copper
- Square O Strap is crimped onto tube



630-C248


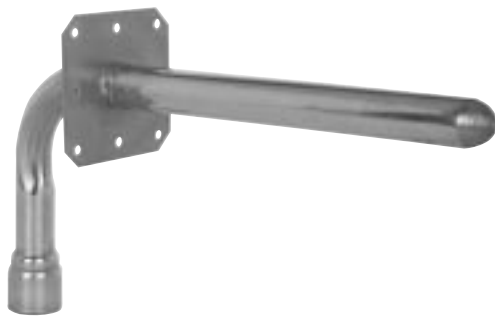


630-C248E

Use Caution When Soldering


Keep the following minimum distances between CPVC joints and solder joints:

	No Heat Blocker	With Heat Blocker
1/2" CTS	10"	6"
3/4" CTS	10"	6"
1" CTS	18"	15"

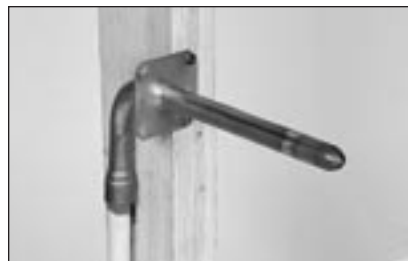

Stub out elbows combine elbow and cap in one quick, easy stub out fitting.

Guaranteed Leakproof
Spin closed ends have **five** times the wall thickness of the copper tube. Each fitting is factory inspected.



FCG-BM
SYSTEM COMPATIBLE

Item No.	Connection	Dimensions				Min. Qty.	Case Qty.	List Price
		A	B	C	D			
STANDARD								
BULK								
630-C248	½" CPVC socket	3½"	8"	1¼"	—	50	50	5.70 EA
630-C2412	½" CPVC socket	3½"	12	1¼"	—	50	50	7.38 EA
630-C287	½" CPVC socket	8"	7"	1 ¼"	—	50	50	6.70 EA
630-C348	¾" CPVC socket	6"	8"	1¾"	—	50	50	10.52 EA
630-C3612	¾" CPVC socket	6"	12"	1¾"	—	25	25	13.51 EA
630-C41110	1" CPVC socket	11"	10"	2"	—	25	25	22.63 EA
INDIVIDUALLY BAR-CODED IN A CUT CASE BOX								
630-C248PK	½" CPVC socket	3½"	8"	1¼"	—	10	10	5.84 EA
WITH SQUARE O STRAP								
630-C248E	½" CPVC socket	3½"	8"	1¼"	1¾"	25	25	6.70 EA