

48P21-811

AIR HANDLER AND TIME DELAY CONTROLS

OEM direct replacements for fast and easy installation.

FEATURES


- Carrier 48M55 3-in-1 design replaces HK610A002 / 006 / 010
- Carrier 48P55 low cost 2-in-1 design replaces HK610A002 / 006
- Rheem single stage air handler controls available for both PSC and ECMx blower motors

SPECIFICATIONS

Operating Temperature Range -40 to 175°F (-40 to 80°C)
 Input Voltage 24 Vac 50/60 Hz
 Input Voltage (48C21-707)..... 24 Vac 60 Hz

AIR HANDLER AND TIME DELAY CONTROLS

OEM DIRECT REPLACEMENT	DESCRIPTION	BLOWER MOTOR	MOUNTING	BLOWER MOTOR SPEED TAPS	THERMOSTAT INPUTS	ADDITIONAL WIRING ACCESSORIES	COMMUNICATING SYSTEM	MODEL NUMBER	ORDER NUMBER
Carrier	Single Stage Air Handler	PSC or ECMx	Metal Standoff	1	R, C, G, W	–	–	48M55-751	48M55-751
Carrier	Single Stage Air Handler	PSC	Metal Standoff	1	R, C, G, W	–	–	48P55-751	48P55-751
Goodman	Two-Stage Air Handler	Variable Speed	Standoff	4-wire Interface	1, 2, R, C, W1, W2, Y1, Y2, G, O, DEHUM	–	Yes	48C21-707	48C21-707
Rheem	Single Stage Air Handler	PSC	Standoff	M1, Fan	R, C, G, W1, W2	Yes	–	48P21-811	48P21-811
Rheem	Single Stage Air Handler	ECMx	Standoff	X13 SPD, X13 G, COM	R, C, G, W1, W2, Y1	–	–	48X21-811	48X21-811
Trane	Single Stage Time Delay	PSC	Metal Plate	–	–	–	–	57T01-843	57T01-843

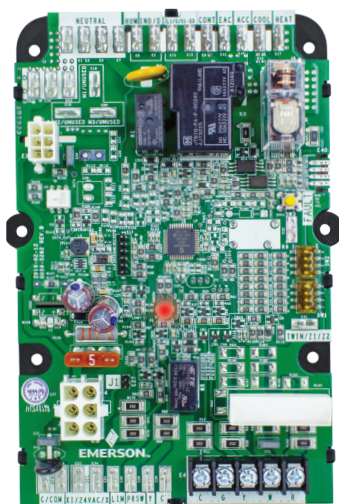

50F06-843

UNIVERSAL FURNACE ELECTRONIC FAN TIMER

The 50F06-843 is an aftermarket universal replacement fan timer control for single stage furnaces with PSC inducer and blower motors. Works with non-integrated furnace controls or intelligent gas valves.

FEATURES

- Six mounting hole options
- Harnesses with terminal flags for easy wiring
- Terminals are labeled to match multiple existing boards
- Transformer connections offer 1/4" and 3/16" terminals
- Tri-Color LED displays status and fault codes
- Exclusive fault recall button

SPECIFICATIONS

Operating Temperature Range -40°F to 176°F
 Dimensions 5.0" W x 7.0" L x 1.50" D
 Input Low Voltage 25 VAC 60 Hz
 Input Line Voltage 115/230 VAC 60 Hz
 Max Input Current 800mA @ 25 VAC

UNIVERSAL FURNACE ELECTRONIC FAN TIMER

DESCRIPTION	BLOWER / INDUCER MOTOR	MOUNTING	THERMOSTAT INPUTS	TWINNING	WIRING ACCESSORIES	MODEL NUMBER	ORDER NUMBER
Universal Electronic Fan Timer for non-integrated single stage furnaces. Replaces Honeywell ST9120U1011, ICM270, and Robertshaw 695-003.	PSC / PSC	2 or 4 Mounting Screws	R, C, W, Y, G	Yes	Yes	50F06-843	50F06-843