

**767A-356****767A-357****767A-361****767A-365****767A-366****767A-369****767A-370**

767A SERIES SILICON CARBIDE HOT SURFACE IGNITORS

Highly Reliable Ignition Source

FEATURES

- Multiple mounting styles.
- Works with 15, 17 or 45 second HSI systems.

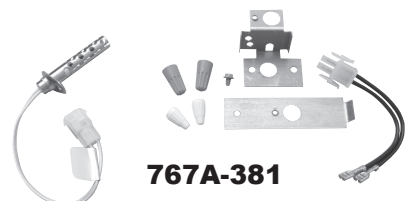
SPECIFICATIONS

Electrical Rating 120 VAC, 60 Hz
Agency C.S.A. approved

Model Number	Lead Length	Lead Insulation Temp. Rating	Electrical Connection	Ceramic Insulator & Electrical Connections (See Fig.)
767A-356	6"	200°C	Receptacle with .093" Male Pins	A
767A-357	5.25"	200°C	Receptacle with .093" Male Pins	B
767A-361	5.25"	200°C	Receptacle with .093" Male Pins	C
767A-365	5.688"	200°C	1/4" Female Spade Terminals	D
767A-366	5.313"	200°C	AMP 1-480699-0 Electrical Conn. Receptacle with .093" Male Pins	E
767A-369	5.5"	200°C	Molex Internally Keyed Connector with .093" Male Pins	F
767A-370	5.25"	200°C	Receptacle with .093" Male Pins	G
767A-371	19.125"	200°C	Stripped Ends	H
767A-372	5.25"	200°C	Molex Side Lock Connector with .092" Male Pins	I
767A-373	5.25"	200°C	Receptacle with .093" Male Pins	J
767A-374	11"	200°C	Stripped Ends	K
767A-375	1.375"	200°C	1/4" Female Spade Terminals	L
767A-376	4.5"	200°C	Molex Front Lock Connector with .092" Male Pins	M
767A-377	4.5"	200°C	Molex Front Lock Connector with .092" Male Pins	N
767A-378	5.125"	200°C	Electrical Connector matches AMANA #20165702	O
767A-379	7.5"	200°C	Electrical Connector matches YORK #025-33421-000	P
767A-380	6.125"	200°C	Electrical Connector matches ARMSTRONG #44744-2	Q
767A-381	7.5"	200°C	Electrical Connector matches YORK #473-20937-001	P
767A-382	5.25"	200°C	Receptacle with .093" Male Pins	G
767A-383	5.25"	200°C	Molex Side Lock Connector with .092" Male Pins	I
767A-384	5.25"	200°C	Receptacle with .093" Male Pins	J

TECHNICAL HELP

Dimension drawings see next page

**767A-371****767A-372****767A-373****767A-374****767A-375****767A-376****767A-377****767A-378****767A-379****767A-380****767A-381****767A-382****767A-383****767A-384**

SILICON CARBIDE

61