



325 COMMERCE DRIVE
MT VERNON, OH 43050
800-253-8236

SPECIFICATION DATA SHEET

DATE: 9-25-12
PREPARED BY: RL


MODEL NO. 236

CONICAL FLOWTITE W/ DAMPER

STANDARD MODEL

DIMENSIONS

SIZE	A	B	C	D
6x4	4"	6"	8"	7 1/2"
7x5	5"	7"	9"	7 1/2"
8x6	6"	8"	9 3/4"	7 1/2"
9x7	7"	9"	10 3/4"	7 1/2"
10x8	8"	10"	11 3/4"	7 1/2"
11x9	9"	11"	13"	7 1/2"
12x10	10"	12"	13 3/4"	7 1/2"
14x12	12"	14"	15 3/4"	7 1/2"
16x14	14"	16"	17 3/4"	7 1/2"
18x16	16"	18"	20"	7 1/2"

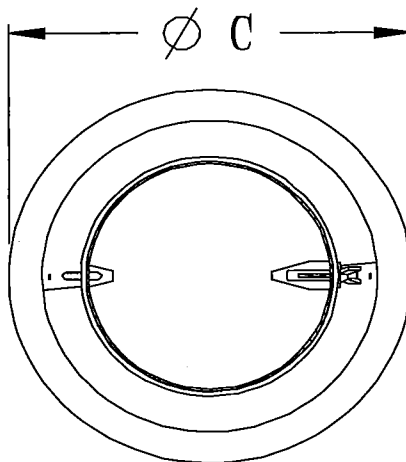

MATERIAL SPECIFICATIONS



HOT DIPPED GALVANIZED STEEL.
PER ASTM A 653 CSB.

BODY : 4"-18" = 28GA
DAMPER: 4"-8" = 28GA
 9"-12" = 26GA
 14"-18" = 24GA

ASSEMBLED WITH 1/8" ZINC COATED RIVETS.

GASKET IS CROSSLINKED POLYETHYLENE.

WINGNUT : 5/16-18, ZINC PLATED STEEL

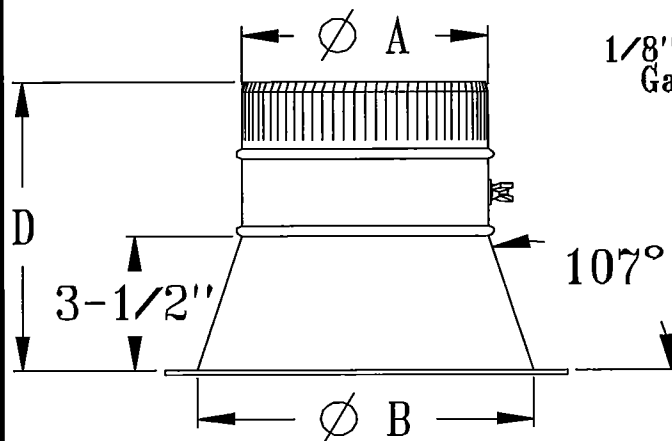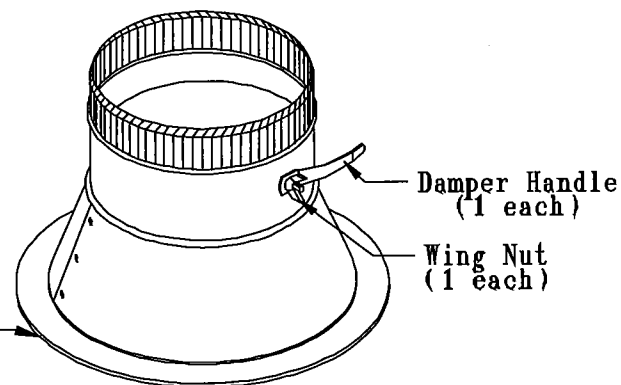

OPTIONS

AVAILABLE WITH ECONOMY 2" STANDOFF
AVAILABLE WITH DURODYNE STANDOFF:
 1/4" DAMPER ENDS
AVAILABLE WITH 2 WINGNUTS

JOB: _____
LOCATION: _____
CONTRACTOR: _____
ENGINEER: _____
NOTES: _____