




Square Head Plugs - Hollow Core

150# Malleable Iron, Galvanized

Inches / Pounds

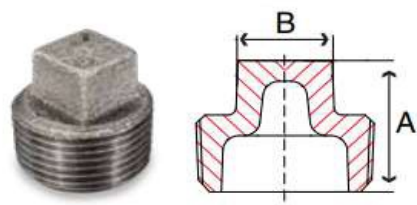

Part #	Size	A (height)	B (head width)	Approximate Weight (in Lbs.)
KSP.125G	1/8	0.65	0.30	0.01
KSP.25G	1/4	0.75	0.38	0.03
KSP.375G	3/8	0.85	0.44	0.05
KSP.5G	1/2	1.00	0.53	0.1
KSP.75G	3/4	1.15	0.58	0.1
KSP1G	1	1.30	0.71	0.2
KSP1.25G	1-1/4	1.40	0.90	0.3
KSP1.5G	1-1/2	1.50	1.10	0.5
KSP2G	2	1.60	1.30	0.7
KSP2.5G	2-1/2	1.85	1.50	1.2
KSP3G	3	1.95	1.69	1.7
KSP3.5G	3-1/2	2.10	1.84	2.5
KSP4G	4	2.30	2.16	3.0
KSP5G	5	2.50	2.50	5.0
KSP6G	6	2.80	2.62	7.3

****Malleable Castings conform to ASTM A197***

****Malleable plugs conform to ASME B16.14***

****NPT Threads on all fittings conform to ASME B1.20.1***

****Class 150 fittings are UL listed and FM approved at 300 psi***

****Hot-dipped galvanized fittings conform to ASTM A153***