

SUBMITTAL DATA SHEET

breeze33

Series Name: Premier Series
Model Number: BZ33-HP183Z2-454-G3-P

Multi Zone Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



EFFICIENCY

Cooling		Heating	
SEER2	20	HSPF2-4	10
EER2	12	COP	3.8

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	18000
Min/Max Capacity	5400~24000
Moisture Removal(L/h)	0
Standard Operating Range(°F/°C)	-13~122/(-25~50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	19000
1. @ 47°F Min/Max Capacity	5700~22000
2. @ 17°F Rated(H32)	14600
3. @ 5°F Rated: Capacity / COP(H42)	14600/2.3
3. @ 5°F Max: Capacity	14600
Standard Operating Range(°F/°C)	-13~75/(-25~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

OUTDOOR SPECIFICATIONS

Compressor Type	Twin-ROTARY
Compressor Model	KTN150D30UFZA
Refrigerant	R454B
Refrigerant Oil Charge(mL)	450
Refrigerant Oil	V74
Outdoor Air Flow (Max) (CFM)	1765.8
Outdoor Noise Level (dBA)	59
Dimension(WxDxH)	inch 35-1/16 x 13-7/16 x 26-1/2 mm 890 x 342 x 673
Package(WxDxH)	inch 40-9/16 x 17-1/4 x 750 mm 1030 x 438 x 750
Net/Gross Weight	lbs 100.53/109.35 kg 45.6/49.6


ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	16
Connection Wiring	AWG 14-4
System MOCP	20
Compressor RLA	8.2
Outdoor Fan Motor RLA	1
Outdoor Fan Motor W	80
Indoor Fan Motor RLA	/
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	1500/(400 ~ 2100)
System Power Input @ Heating (W)	1465/(350 ~ 1600)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING

Liquid Size	3x6.35mm(3x1/4in)
Gas Size	3x9.52mm(3x3/8in)
Max. Piping Length for all rooms(ft/m)	196.8/(60)
Max. Piping Length for one IDU(ft/m)	98.4/(30)
Max. Height Difference of IDU and ODU(ft/m)	49.2/(15)
Refrigerant Pre-charged Amount(oz/kg)	61.73/(1.75)
Refrigerant Precharge Length(ft/m)	24.6(7.5)x3
Additional Charge of Refrigerant (Ø6.35 (1/4") liquid pipe) ((oz/ft)/(g/m))	0.16/(15)
Additional Charge of Refrigerant (Ø9.52 (3/8") liquid pipe) ((oz/ft)/(g/m))	0.32(30)
Connection Method	Flared

Outdoor Unit Dimension

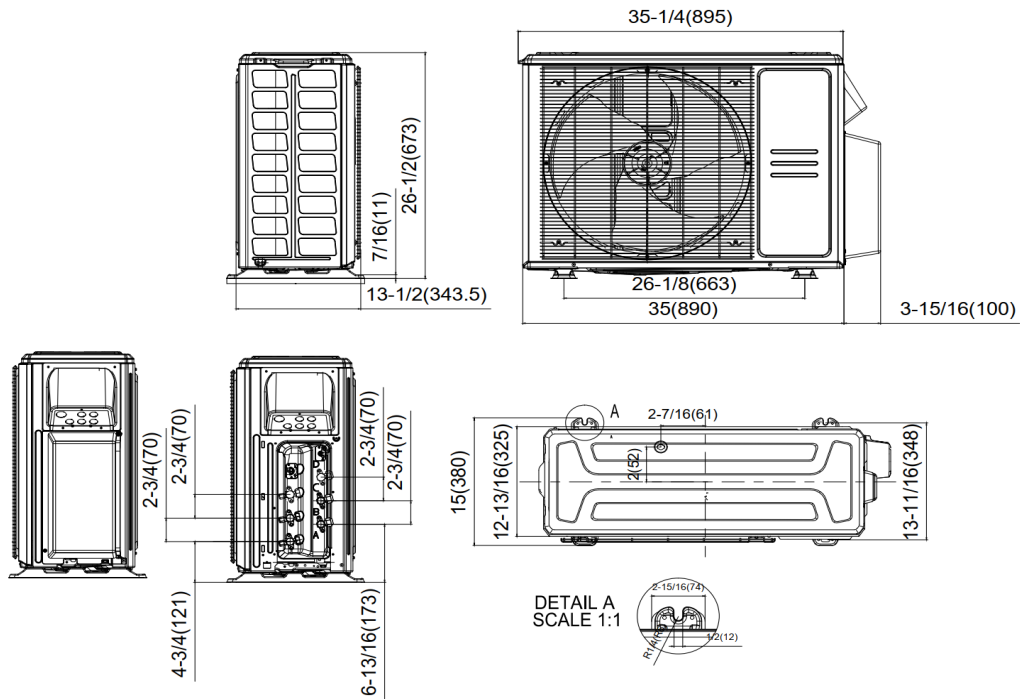

Installation Instruction

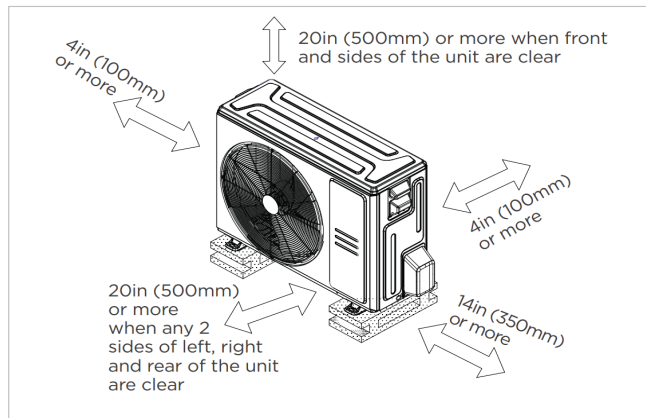

☒ Meets all spatial requirements shown in Installation Clearance Requirements above.