

SUBMITTAL DATA SHEET

Series Name: Premier Series

Model Number: BZ33-HYP24OUT2-454-G3-P / BZ33-CASS24-454-G3-P

breeze33

4-Way Cassette Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATIONS

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		765.2 / 706.3 / 635.7 / 547.4 / N/A
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		48.5/45.0/42.5/33.5/N/A
Dimension(W×D×H)	inch	32-11/16×32-11/16×8-1/16
	mm	830×830×205
Package(W×D×H)	inch	35-13/16×35-13/16×9-13/16
	mm	910×910×250
Net/Gross Weight	lbs	47.18/59.08
	kg	21.4/26.8

OUTDOOR SPECIFICATION

Compressor Type	ROTARY	
Compressor Model	KTM240D46UKT2	
Refrigerant	R454B	
Refrigerant Oil Charge(mL)	620	
Refrigerant Oil	VG74	
Outdoor Air Flow (Max) (CFM)	2236.7	
Outdoor Noise Level (dBA)	61.5	
Dimension(W×D×H)	inch	37-1/4× 16-3/16× 31-15/16
	mm	946 × 410 × 810
Package(W×D×H)	inch	42-15/16× 19-11/16× 34-7/8
	mm	1090 × 500 × 885
Net/Gross Weight	lbs	130.29/141.31
	kg	59.1/64.1

ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	24.90
Connection Wiring	14#x4
System MOCP	25
Compressor RLA	15.0
Outdoor Fan Motor RLA	1.3
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	1.0
Indoor Fan Motor W	45
System Power Input @ Cooling (W)	1958(960 ~ 2300)
System Power Input @ Heating (W)	2070(695 ~ 2490)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING

Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	9.52mm(3/8in)
Gas Size	15.9mm(5/8in)
Max. Piping Length(ft/m)	164.00(50)
Max. Height Difference(ft/m)	82.00(25)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	63.49(1.80)
Additional Charge of Refrigerant((oz/ft)/(g/m))	0.32(30)
Connection Method	Flared

EFFICIENCY

Cooling		Heating	
SEER2	20.7	HSPF2-4	11.6
EER2	12.0	COP	3.54


PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	23400
Min/Max Capacity	12800~26200
Moisture Removal(L/h)	2.36
Standard Operating Range(*F/*C)	-22~122(-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB



PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	25000
1. @ 47°F Min/Max Capacity	11500~30700
2. @ 17°F Rated	20400
3. @ 5°F Rated: Capacity / COP	23800/2.23
3. @ 5°F Max: Capacity	23800
Standard Operating Range(*F/*C)	-22~75(-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

Indoor Unit Dimension

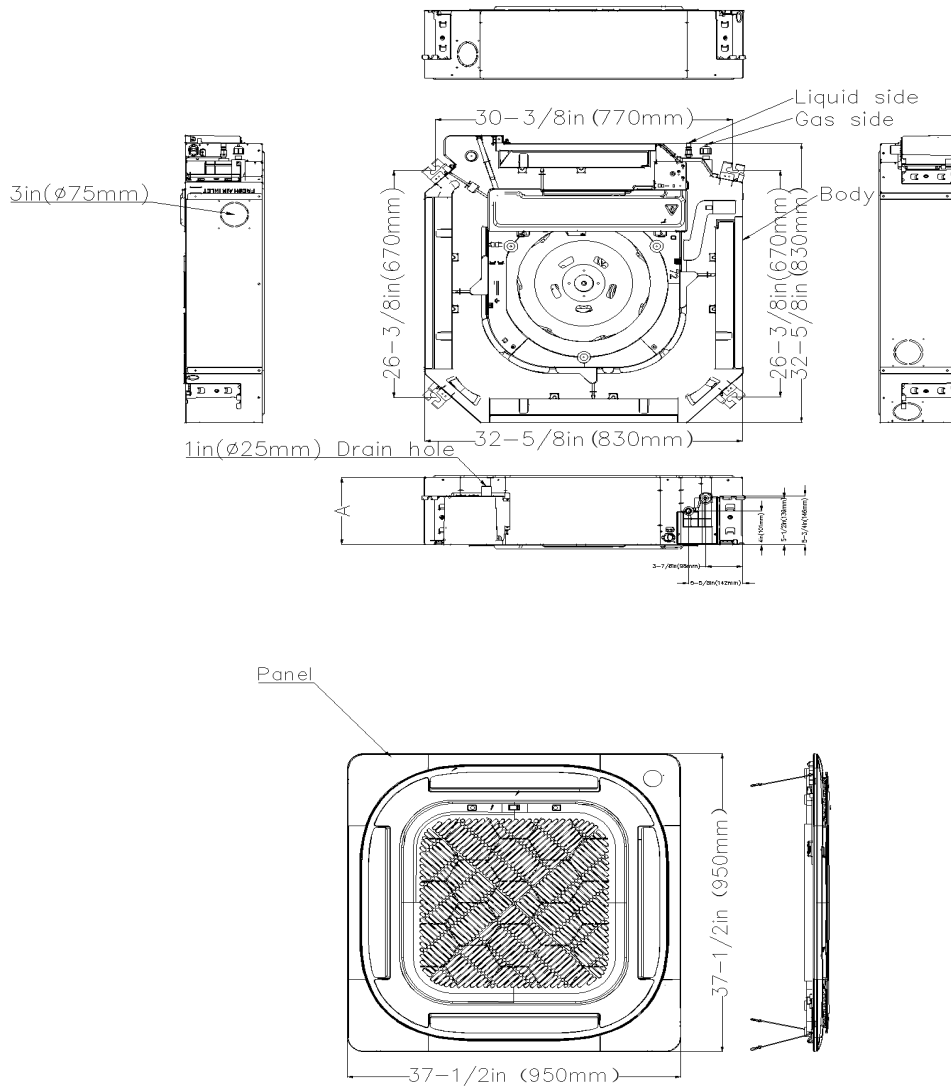


Installation Instruction

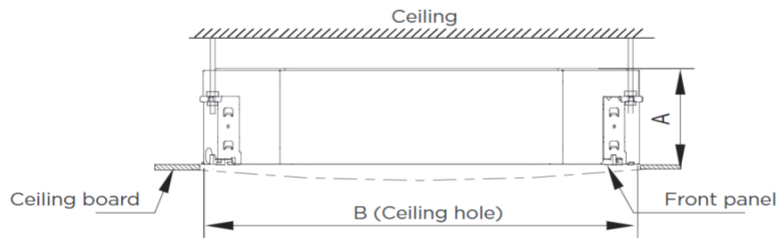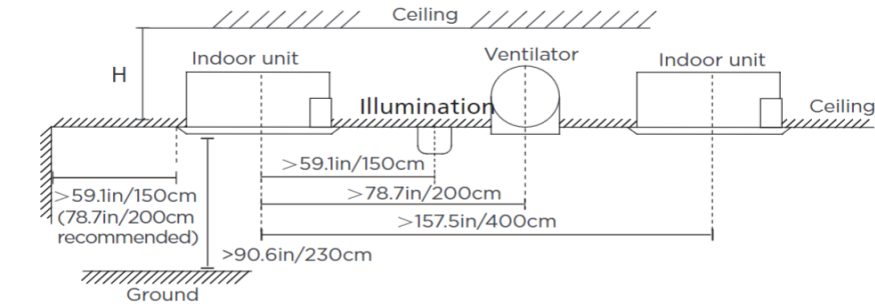


Distance from ceiling relative to height of indoor unit

MODEL	Length of A	Length of H	Length of B
9K/12K/18K	9.6in (245mm)	$>10.8\text{in}$ (275mm)	23.6in (600mm)
24K	8.03in (205mm)	9.06in (230mm)	35.4in (900mm)
36K	9.65in (245mm)	10.7in (271mm)	
48K	11.3in (287mm)	12.3in (313mm)	

Outdoor Unit Dimension

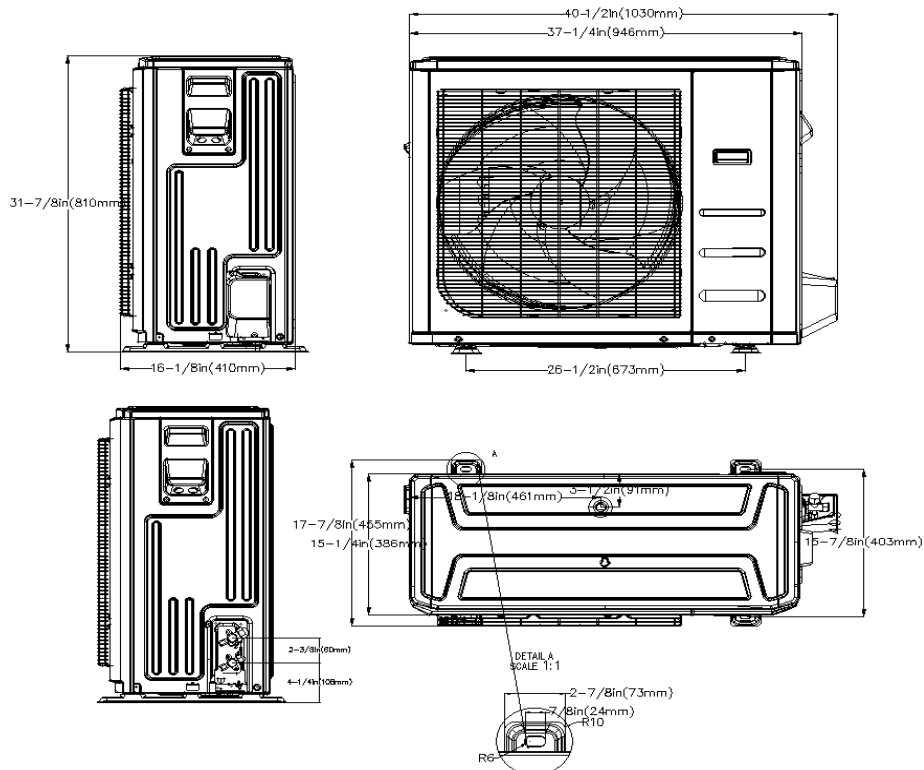

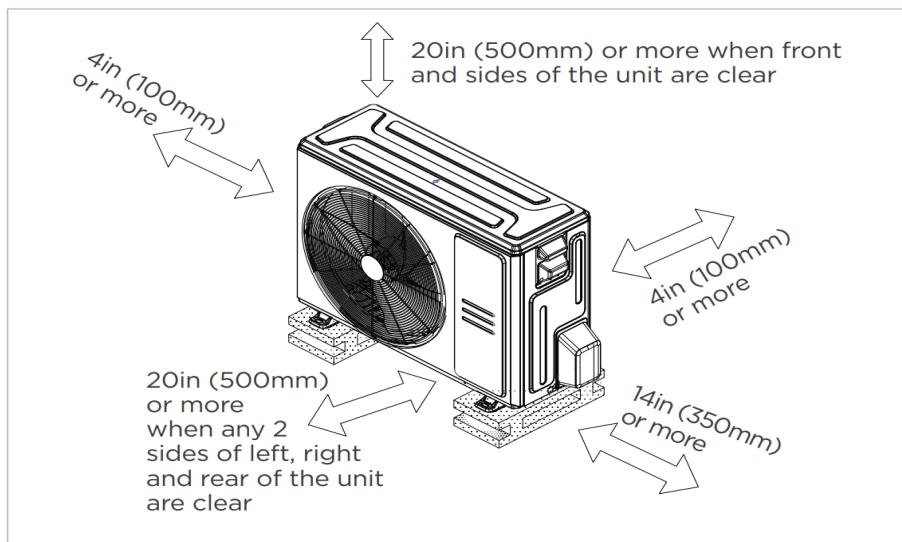

Meets all spatial requirements shown in Installation Clearance Requirements above.

FEATURES

- 360° Air Flow
- Remote on-off and alarm ports
- Refrigerant leakage detection sensor(Optional)
- Humidity sensor
- Built-in pump
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- 2-pin connector(HA/HB) for programmable wired controller
- Multiple control options available:
 - Two way communication wired controller:120N(X6)
 - Two way communication wired controller with built-in WiFi:120N(X6W)
 - Infrared wired controller: 120L
 - Wireless remote controller
 - Third-Party 24V Thermostat*

*24V interface is required.