

SUBMITTAL DATA SHEET

breeze33

Series Name: Premier Series
Model Number: **BZ33-HYP24OUT2-454-G3-P/BZ33-IFCM24-454-G3-P**

Ceiling&Floor Heat Pump System			
Location:		Approval:	
Engineer:		Date:	
Submitted to:		Construction:	
Submitted by:		Unit #:	
Reference:		Drawing #:	



INDOOR SPECIFICATIONS			
Indoor Air Flow (Turbo/H/M/L/Si) (CFM)		735.8 / 706.3 / 606.3 / 453.2 / 376.7	
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)		51.5/49.0/45.0/34.0/29.0	
Dimension(W×D×H)	inch	42-1/16 x 26-9/16 x 9-1/2	
	mm	1068 × 675 × 235	
Package(W×D×H)	inch	45-1/16 x 29-3/4 x 12-1/2	
	mm	1145 × 755 × 318	
Net/Gross Weight	lbs	61.29/73.19	
	kg	27.8/33.2	

OUTDOOR SPECIFICATIONS			
Compressor Type		ROTARY	
Compressor Model		KTM240D46UKT2	
Refrigerant		R454B	
Refrigerant Oil Charge(mL)		620	
Refrigerant Oil		VG74	
Outdoor Air Flow (Max) (CFM)		2236.7	
Outdoor Noise Level (dBA)		61.5	
Dimension(W×D×H)	inch	37-1/4 x 16-1/8 x 31-7/8	
	mm	946 × 410 × 810	
Package(W×D×H)	inch	42-15/16 x 19-11/16 x 34-13/16	
	mm	1090 × 500 × 885	
Net/Gross Weight	lbs	130.29/141.31	
	kg	59.1/64.1	

EFFICIENCY			
Cooling		Heating	
SEER2	20.4	HSPF2-4	12.1
EER2	12.0	COP	3.34


PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	22000
Min/Max Capacity	12700~25600
Moisture Removal(L/h)	2.73
Standard Operating Range(°F/°C)	-22~122(-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 85°F DB/75°F WB

PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	26000
1. @ 47°F Min/Max Capacity	11300~29500
2. @ 17°F Rated	20200
3. @ 5°F Rated: Capacity / COP	24200/2.16
3. @ 5°F Max: Capacity	24200
Standard Operating Range(°F/°C)	-22~75(-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

ELECTRICAL	
Power Supply	208/230V,60Hz,1Ph
System MCA	24.90
Connection Wiring	14#x4
System MOCP	25
Compressor RLA	15.0
Outdoor Fan Motor RLA	1.3
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	1.0
Indoor Fan Motor W	90
System Power Input @ Cooling (W)	1833(980 ~ 2300)
System Power Input @ Heating (W)	2194(630 ~ 2570)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)


PIPING	
Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	9.52mm(3/8in)
Gas Size	15.9mm(5/8in)
Max. Piping Length(ft/m)	164.00(50)
Max. Height Difference(ft/m)	82.00(25)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	63.49(1.80)
Additional Charge of Refrigerant(oz/ft)/(g/m)	0.32(30)
Connection Method	Flared

Indoor Unit Dimension

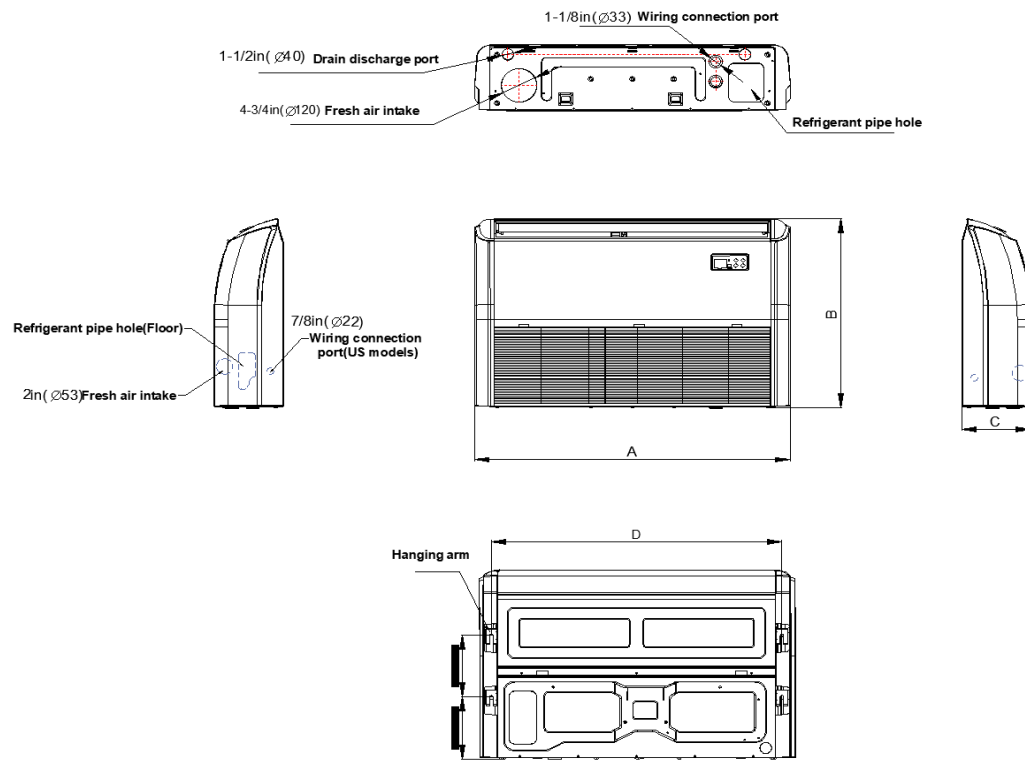



Model	A	B	C	D
18K/24K	42in(1068mm)	26-1/2in(675mm)	9-1/4in(235mm)	38-3/4in(983mm)
36K/48K/60K	65in(1650mm)	26-1/2in(675mm)	9-1/4in(235mm)	61-5/8in(1565mm)

Installation Instruction

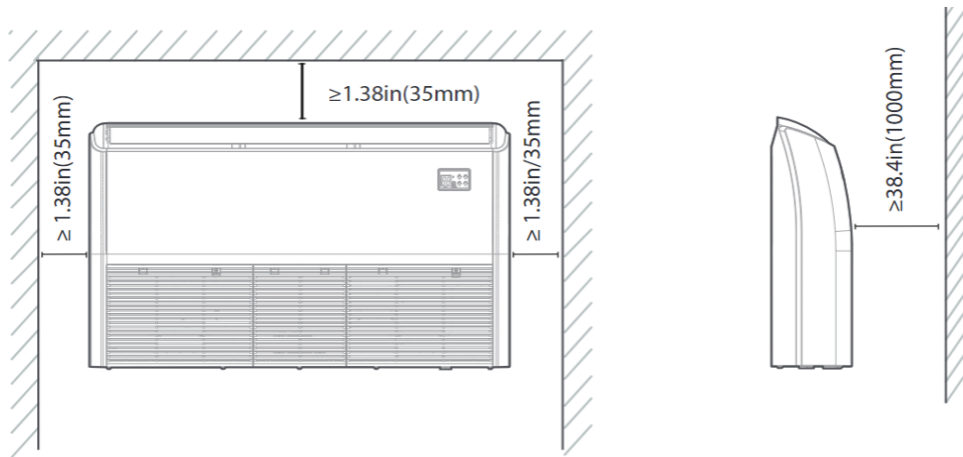

Outdoor Unit Dimension

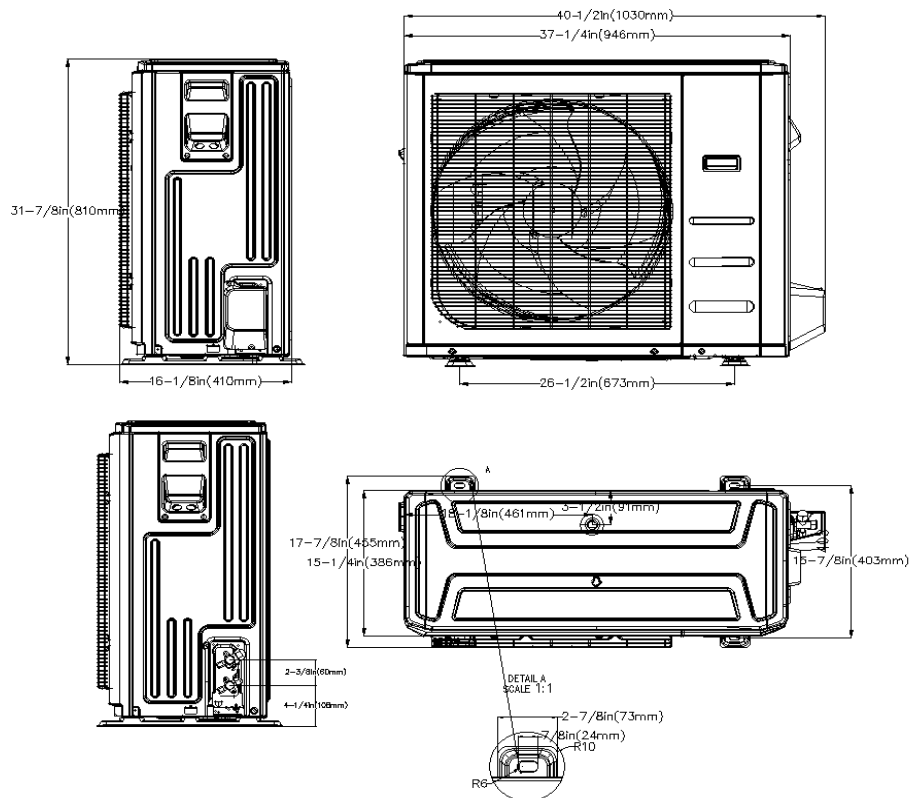

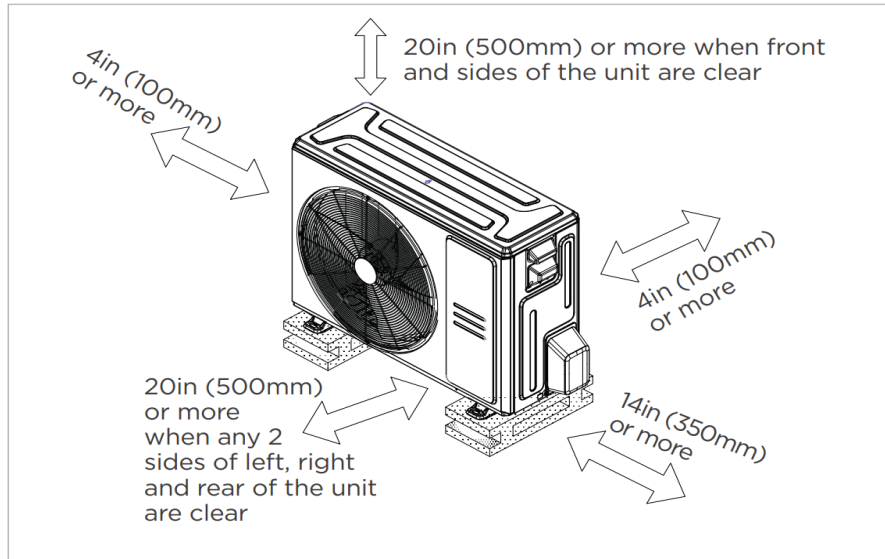

Meets all spatial requirements shown in Installation Clearance Requirements above.

FEATURES

- 2 Style Installation
- 3D Airflow
- Refrigerant leakage detection sensor
- Humidity sensor
- "88" display tube
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- 2-pin connector(HA/HB) for programmable wired controller
- Multiple control options available:
 - Two way communication wired controller:120N(X6)
 - Two way communication wired controller with built-in WiFi:120N(X6W)
 - Infrared wired controller: 120L
 - Wireless remote controller
 - Third-Party 24V Thermostat*

*24V interface is required.