

SUBMITTAL DATA SHEET

breeze33

Series Name: Premier Series
Model Number: **BZ33-HYP365Z2-454-G3-P**

Multi Zone Heat Pump System			
Location:		Approval:	
Engineer:		Date:	
Submitted to:		Construction:	
Submitted by:		Unit #:	
Reference:		Drawing #:	



EFFICIENCY			
Cooling		Heating	
SEER2	19.4	HSPF2-4	10.4
EER2	12	COP	3.8

PERFORMANCE of Cooling	
Cooling (Btu/hr)	
Rated Capacity	36000
Min/Max Capacity	9000~42000
Moisture Removal(L/h)	2
Standard Operating Range(°F/°C)	-22~122/(-30~50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB


PERFORMANCE of Heating	
Heating (Btu/hr)	
1. @ 47°F Rated	36000
1. @ 47°F Min/Max Capacity	10000~45000
2. @ 17°F Rated (H32)	33000
3. @ 5°F Rated: Capacity / COP(H42)	38000/2
3. @ 5°F Max: Capacity	38000
Standard Operating Range(°F/°C)	-22~75/(-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

OUTDOOR SPECIFICATIONS	
Compressor Type	TWIN-ROTARY
Compressor Model	EKPQ420D1UMUA
Refrigerant	R454B
Refrigerant Oil Charge(mL)	1460
Refrigerant Oil	VG75
Outdoor Air Flow (Max) (CFM)	3037.2
Outdoor Noise Level (dBA)	65
Dimension(WxDxH)	inch 38-9/16 x 16-5/16 x 38-3/8 mm 980 x 415 x 975
Package(WxDxH)	inch 45-1/16 x 19-11/16 x 42-1/2 mm 1145 x 500 x 1080
Net/Gross Weight	lbs 211.86/244.71 kg 96.1/111


ELECTRICAL	
Power Supply	208/230V, 60Hz, 1Ph
System MCA	37
Connection Wiring	AWG 14-4
System MOCP	40
Compressor RLA	20.5
Outdoor Fan Motor RLA	2.6
Outdoor Fan Motor W	250
Indoor Fan Motor RLA	/
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	3000/(600 ~ 4200)
System Power Input @ Heating (W)	2776/(600 ~ 3650)
MCA: Min. circuit amps (A)	MOC: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING	
Liquid Size	5x6.35mm(5x1/4in)
Gas Size	3x9.52mm+2x12.7mm(3x3/8in+2x1/2in)
Max. Piping Length for all rooms(ft/m)	262.4/(80)
Max. Piping Length for one IDU(ft/m)	114.8/(35)
Max. Height Difference of IDU and ODU(ft/m)	49.2/(15)
Refrigerant Pre-charged Amount(oz/kg)	134.04/(3.8)
Refrigerant Precharge Length(ft/m)	24.6(7.5)x5
Additional Charge of Refrigerant (Φ6.35 (1/4") liquid pipe) ((oz/ft)/(g/m))	0.16/(15)
Additional Charge of Refrigerant (Φ9.52 (3/8") liquid pipe) ((oz/ft)/(g/m))	0.32(30)
Connection Method	Flared

Outdoor Unit Dimension

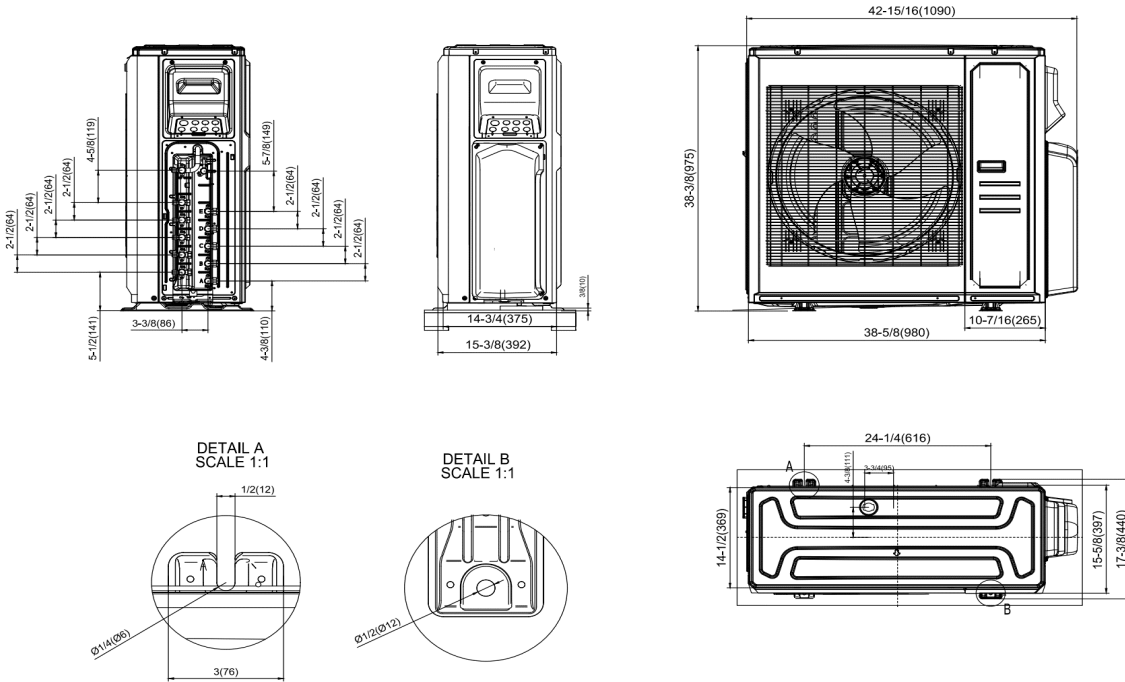

Installation Instruction

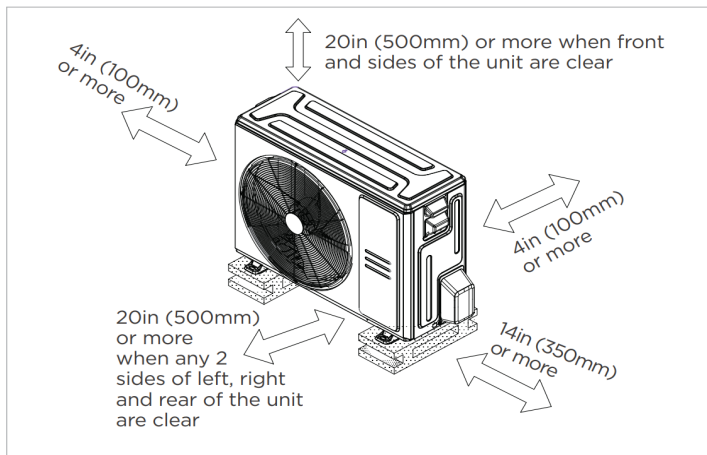

☒ Meets all spatial requirements shown in Installation Clearance Requirements above.