

SUBMITTAL DATA SHEET



Series Name: Premier Series

Model Number: BZ33-HYP36OUT2-454-G3-P/BZ33-IFCM36-454-G3-P

Ceiling&Floor Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	1224.3 / 1088.9 / 988.8 / 765.2 / 653.3
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	N/A/51.0/45.5/39.0/35.0
Dimension(W×D×H)	inch mm
	64-15/16 x 26-9/16 x 9-1/4 1650 x 675 x 235
Package(W×D×H)	inch mm
	67-15/16 x 29-3/4 x 12-1/2 1725 x 755 x 318
Net/Gross Weight	lbs kg
	88.85/104.94 40.3/47.6

OUTDOOR SPECIFICATION

Compressor Type	TWIN-ROTARY
Compressor Model	EKPQ420D1UMUA
Refrigerant	R454B
Refrigerant Oil Charge(mL)	1460
Refrigerant Oil	VG75
Outdoor Air Flow (Max) (CFM)	3001.9
Outdoor Noise Level (dBA)	65.0
Dimension(W×D×H)	inch mm
	38-9/16 x 16-5/16 x 38-3/8 980 x 415 x 975
Package(W×D×H)	inch mm
	45-1/16 x 19-11/16 x 42-1/2 1145 x 500 x 1080
Net/Gross Weight	lbs kg
	206.57/237.44 93.7/107.7

EFFICIENCY

Cooling	Heating
SEER2	HSPF2-4
EER2	COP
20	10.8
12.0	3.29

PERFORMANCE of Cooling

Cooling (Btu/hr)	
Rated Capacity	36400
Min/Max Capacity	6100~38300
Moisture Removal(L/h)	3.10
Standard Operating Range(°F/°C)	-22~122(-30~50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)	
1. @ 47°F Rated	38000
1. @ 47°F Min/Max Capacity	11100~45400
2. @ 17°F Rated	30200
3. @ 5°F Rated: Capacity / COP	39500/2.02
3. @ 5°F Max: Capacity	39500
Standard Operating Range(°F/°C)	-22~75(-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB


ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	38.00
Connection Wiring	14#x3
System MOCP	40
Compressor RLA	24.5
Outdoor Fan Motor RLA	2.1
Outdoor Fan Motor W	250
Indoor Fan Motor RLA	1.0
Indoor Fan Motor W	90
System Power Input @ Cooling (W)	3033(590 ~ 3610)
System Power Input @ Heating (W)	3385(675 ~4070)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING


Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	9.52mm(3/8in)
Gas Size	19mm(3/4in)
Max. Piping Length(ft/m)	246.00(75)
Max. Height Difference(ft/m)	98.40(30)
Max. Pre-charged Length(ft/m)	24.6(7.5)
Refrigerant Pre-charged Amount(oz/kg)	126.99(3.60)
Additional Charge of Refrigerant(oz/ft)/(g/m)	0.32(30)
Connection Method	Flared

Indoor Unit Dimension

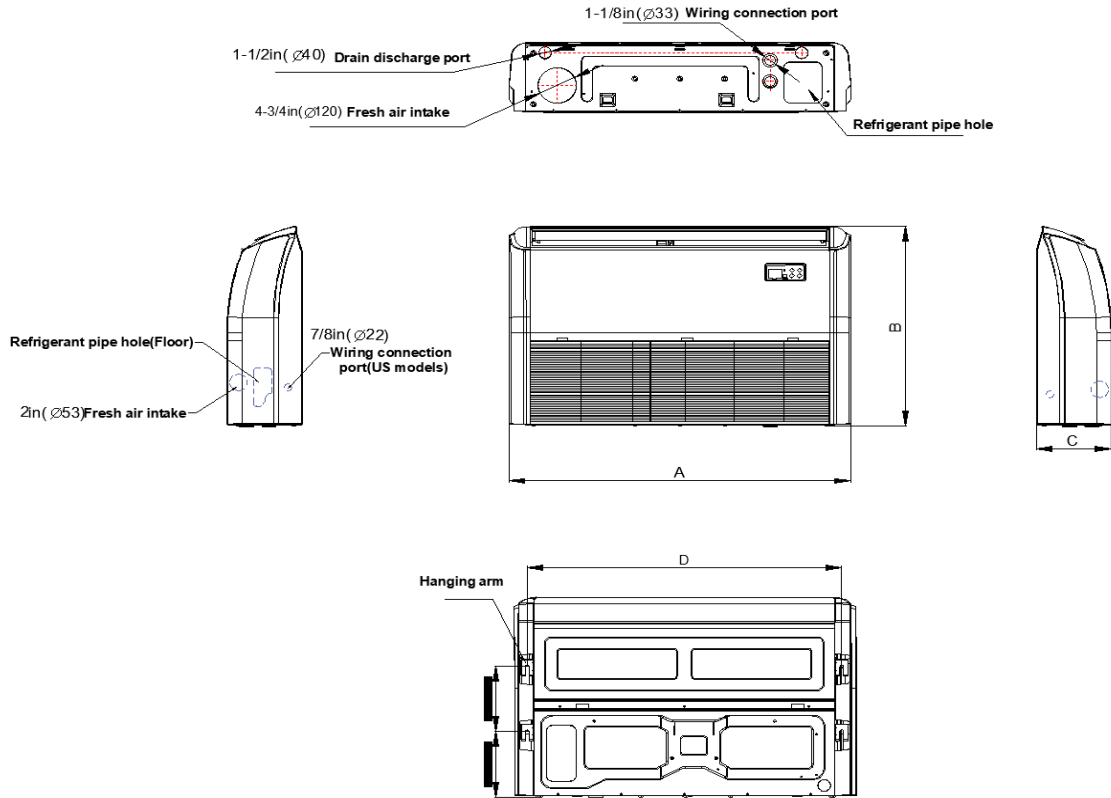


Model	A	B	C	D
18K/24K	42in(1068mm)	26-1/2in(675mm)	9-1/4in(235mm)	38-3/4in(983mm)
36K/48K/60K	65in(1650mm)	26-1/2in(675mm)	9-1/4in(235mm)	61-5/8in(1565mm)


Installation Instruction

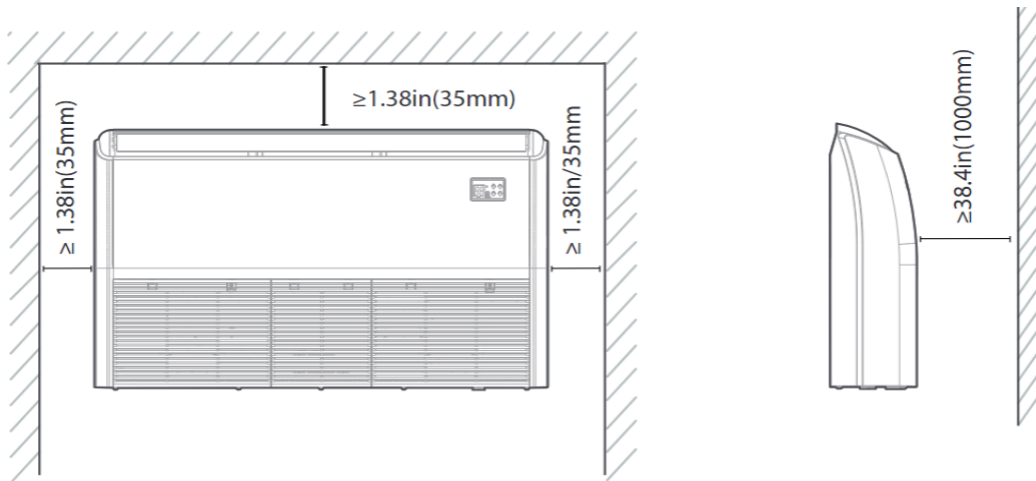

Outdoor Unit Dimension

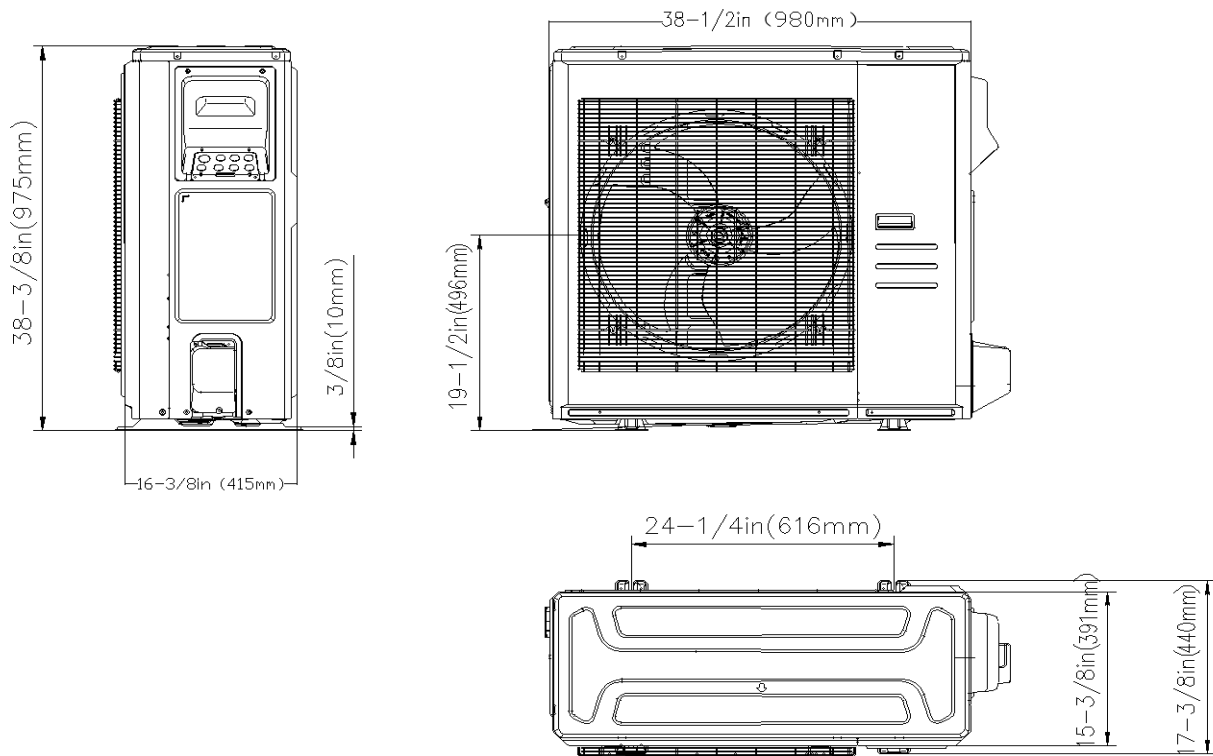

Installation Instruction

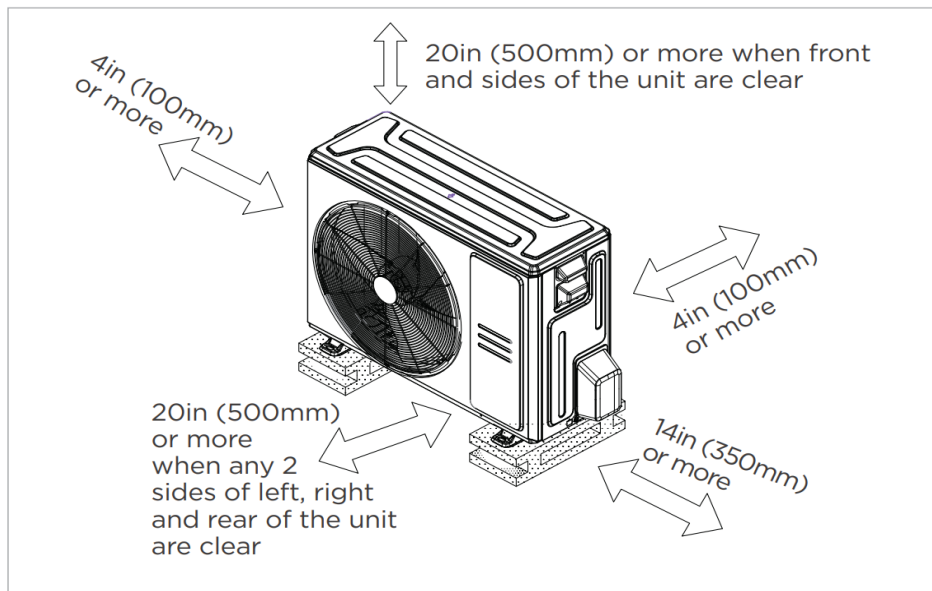

- ☒ Meets all spatial requirements shown in Installation Clearance Requirements above.

FEATURES

- 2 Style Installation
- 3D Airflow
- Refrigerant leakage detection sensor
- Humidity sensor
- "88" display tube
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in WiFi
- OTA(by using WiFi dongle)
- 2-pin connector(HA/HB) for programmable wired controller
- Multiple control options available:
 - Two way communication wired controller:120N(X6)
 - Two way communication wired controller with built-in WiFi:120N(X6W)
 - Infrared wired controller: 120L
 - Wireless remote controller
 - Third-Party 24V Thermostat*

*24V interface is required.