

FEATURES & SPECIFICATIONS

INTENDED USE — LED Wireless Speaker Downlight provides an easy and efficient way to light up a room, and enjoy music for the entire family. Wirelessly stream audio from Bluetooth™ enabled devices. Pair up to 8 units together for an enhanced sound experience. Retrofit into most standard 6" recessed housings or new construction and remodel applications.

CONSTRUCTION — Aluminum die cast trim with polycarbonate housing. Round fixture with integral LED's.

PATENT PENDING

OPTICS — Diffused lens surrounding speaker provides even light distribution for general illumination. The LED module maintains at least 70% light output for 35,000 hours.

Wide flood beam angle at >45°.

ELECTRICAL — High-efficiency driver mounted on the module. 1 x 1 4Ω, 5W loudspeaker. Primary power disconnect provided for simple connection to a dedicated LED connector in the housing or E26 adapter provided. Accommodates 120 volts DC at 60Hz.

Dimming down to 10% with most standard incandescent, magnetic low voltage and electronic low voltage dimmers. For compatible dimmers, see page 4 for recommended triac dimmers.

Rechargeable lithium ion battery that lasts up to 6 hours when the light is off. The battery charges when light is turned on and takes approximately 4 hours to fully charge.

INSTALLATION — Suitable for installation in standard rough-in sections.

E26 socket adapter ships standard, except in the state of CA.

Twin torsion springs ensure easy installation for 6" recessed housings. Tested to fit in a minimum enclosure of 6" diameter by 6" height, with a maximum flange diameter of 7.5". For examples of compatible housings No third party application required to operate speaker downlight.

LISTINGS — ETL certified to US and Canadian safety standards. Wet location listed. WSEC ASTM E283 for Air-Tight (with IC housings).

WARRANTY — 3-year limited warranty for LED's and Driver. 1-year limited warranty for Speaker.

Complete warranty terms located at:

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

LED Recessed Downlighting

6SL

6" LED Module
with Integrated Wireless Speaker
IC/Non-IC Retrofit




E26 adaptor
(included)



Specifications

Aperture:	6 (15.1)
Speaker:	3-7/16 (8.7)
Ceiling opening:	Determined by rough-in
Overlap trim:	7-11/16 (19.5)
Height:	5 (12.6)

All dimensions are inches (centimeters)
unless otherwise indicated.

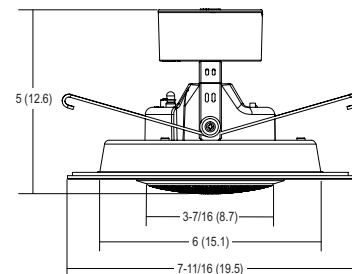

ORDERING INFORMATION

For shortest lead times, configure product using **standard options (shown in bold)**.

Example: 6SL RD 07LM 30K 90CRI MW

6SL						
Series	Reflector	Nominal Lumens	CCT/W/Lumens	CRI	Finish	
6SL 6" Wireless Speaker Downlight	RD Round	07LM 700 Lumens	27K 2700 K / 11W / 650L 30K 3000 K / 12W / 720L 40K 4000 K / 13W / 730L	90CRI 90CRI	MW Matte white	L/SPKR No speaker (companion downlight designed to match the standard 6SL speaker downlight) L/SKTWHIP No E26 Adapter (CA only) ¹

Accessories: Order as separate catalog number.	
TSA	Makes non-bracket housing compatibility with the LED module, ships as a J6 or J25.
RK2 6SL SPEAKER ASSEMBLY	6SL Speaker Module



Torsion Spring Adaptor



RK2 6SL SPEAKER ASSEMBLY



6SL L/SPKR

Notes

¹ This option must be selected for 6SL product shipping to California.

6SL 6" LED Wireless Speaker Downlight

QUICK START INSTALLATION GUIDE

1



Pair first speaker light (MASTER) to your Bluetooth® enabled device prior to installation.

2



Sync additional (SATELLITE) units (up to 7) to MASTER unit prior to installation.

3




Disconnect power at the circuit breaker, then install to recessed housing.

4



Reconnect power at circuit breaker, use light as usual, and enjoy music from any streaming service you like.

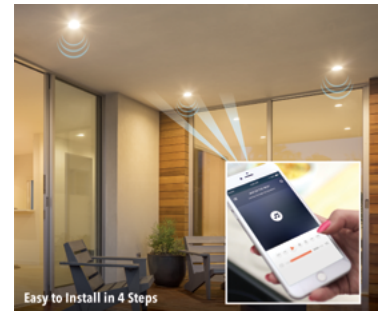

Easy to install in 4 Steps

SPEAKER PAIRING CONFIGURATION

Master Speaker




Max. 30' (9m)



Recommended distance from **Bluetooth®** device to master speaker – up to 30 feet

Satellite Speaker

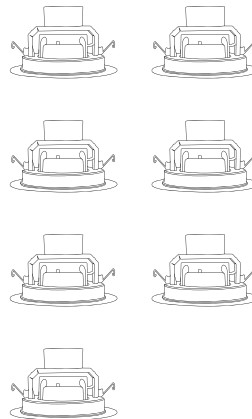

Max. Range
60' (18m)

SPEAKER MODULE INSTALLATION GUIDE

6SL
Companion
Downlight



6SL
Speaker Module
(sold separately)



Speaker
Downlight



6SL 6" LED Wireless Speaker Downlight

PHOTOMETRICS

Distribution Curve	Distribution Data	Output Data	Coefficient of Utilization	Illuminance Data at 30" Above Floor for a Single Luminaire												
6SL RD 07LM, 30K, 90CRI, input watts: 15, delivered lumens: 722, LM/W=48, test no. ISF 34470, tested in accordance with IES LM 79-80																
	Ave Lumens	Zone Lumens % Lamp	pf pc pw	80%			20% 70%			50%			50% beam - 59.5°		10% beam - 104.6°	
				50%	30%	10%	50%	30%	10%	50%	30%	10%				
	0 304	0° - 30° 225.1 31.2	0	119	119	119	116	116	116	111	111	111	Initial FC			
	5 303 29	0° - 40° 356.1 49.3	1	105	101	97	103	99	96	98	95	92	Mounting	Center		
	15 286 80	0° - 60° 590.8 81.8	2	92	85	80	90	84	79	87	82	77	Height	Beam	Diameter	FC
	25 252 116	0° - 90° 722.2 100.0	3	81	73	67	80	72	67	77	71	65	8.0	10.0	6.3	5.0
	35 210 131	90° - 180° 0.0 0.0	4	72	64	57	71	63	57	69	62	56	10.0	5.4	8.6	2.7
	45 164 127	0° - 180° 722.2 *100.0	5	65	56	50	64	56	50	62	55	49	12.0	3.4	10.9	1.7
	55 121 108	*Efficiency	6	59	50	44	58	50	44	56	49	43	14.0	2.3	13.2	1.2
	65 80 79		7	54	45	39	53	45	39	51	44	39	16.0	1.7	15.4	0.8
	75 40 42		8	49	41	35	48	40	35	47	40	35				
	85 8 10		9	45	37	32	45	37	32	43	36	31				
	90 2		10	42	34	29	41	34	29	40	33	29				

6SL RD 07LM, 27K, 90CRI, input watts: 15, delivered lumens: 650, LM/W=43, test no. ISF 34470P1, tested in accordance with IES LM 79-80




	Ave Lumens		Zone Lumens % Lamp	pf pc pw	80%			20% 70%			50%			50% beam - 59.5°		10% beam - 104.6°	
					50%	30%	10%	50%	30%	10%	50%	30%	10%				
	0	274	0° - 30° 202.8 31.2	0	119	119	119	116	116	116	111	111	111	Initial FC			
	5	273 26	0° - 40° 320.7 49.3	1	105	101	97	103	99	96	98	95	92	Mounting	Center		
	15	258 72	0° - 60° 532.1 81.8	2	92	85	80	90	84	79	87	82	77	Height	Beam	Diameter	FC
	25	227 104	0° - 90° 650.5 100.0	3	81	73	67	80	72	67	77	71	65	8.0	9.1	6.3	4.5
	35	189 118	90° - 180° 0.0 0.0	4	72	64	57	71	63	57	69	62	56	10.0	4.9	8.6	2.4
	45	148 114	0° - 180° 650.5 *100.0	5	65	56	50	64	56	50	62	55	49	12.0	3.0	10.9	1.5
	55	109 97	*Efficiency	6	59	50	44	58	50	44	56	49	43	14.0	2.1	13.2	1.0
	65	72 71		7	54	45	39	53	45	39	51	44	39	16.0	1.5	15.4	0.8
	75	36 38		8	49	41	35	48	40	35	47	40	35				
	85	7 9		9	45	37	32	45	37	32	43	36	31				
	90	2		10	42	34	29	41	34	29	40	33	29				

6SL RD 07LM, 40K, 90CRI, input watts: 15, delivered lumens: 730, LM/W=48, test no. ISF 34470P2, tested in accordance with IES LM 79-80

	Ave Lumens		Zone Lumens % Lamp	pf pc pw	80%			20% 70%			50%			50% beam - 59.5°		10% beam - 104.6°	
					50%	30%	10%	50%	30%	10%	50%	30%	10%				
	0	307	0° - 30° 227.6 31.2	0	119	119	119	116	116	116	111	111	111	Initial FC			
	5	306 29	0° - 40° 360.0 49.3	1	105	101	97	103	99	96	98	95	92	Mounting	Center		
	15	289 81	0° - 60° 597.3 81.8	2	92	85	80	90	84	79	87	82	77	Height	Beam	Diameter	FC
	25	255 117	0° - 90° 730.1 100.0	3	81	73	67	80	72	67	77	71	65	8.0	10.2	6.3	5.1
	35	212 132	90° - 180° 0.0 0.0	4	72	64	57	71	63	57	69	62	56	10.0	5.5	8.6	2.7
	45	166 128	0° - 180° 730.1 *100.0	5	65	56	50	64	56	50	62	55	49	12.0	3.4	10.9	1.7
	55	122 109	*Efficiency	6	59	50	44	58	50	44	56	49	43	14.0	2.3	13.2	1.2
	65	80 80		7	54	45	39	53	45	39	51	44	39	16.0	1.7	15.4	0.8
	75	40 43		8	49	41	35	48	40	35	47	40	35				
	85	8 11		9	45	37	32	45	37	32	43	36	31				
	90	2		10	42	34	29	41	34	29	40	33	29				

6SL 6" LED Wireless Speaker Downlight

ADDITIONAL DATA, DIMMING, AND LIGHTING FACTS

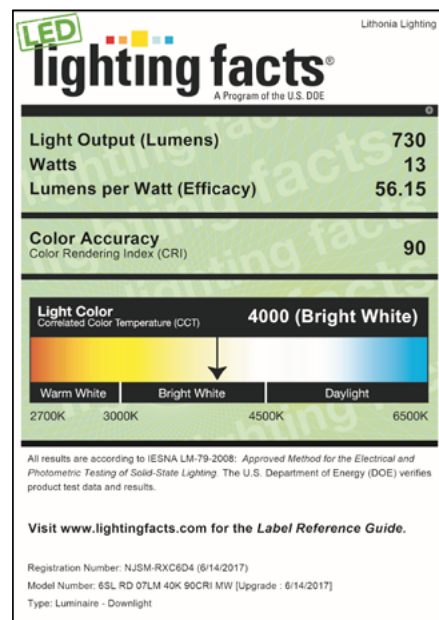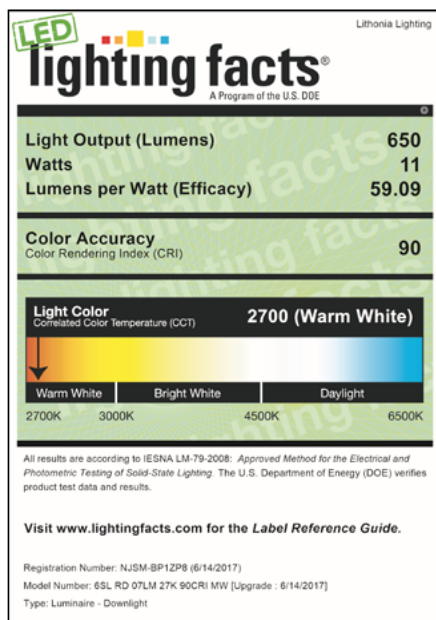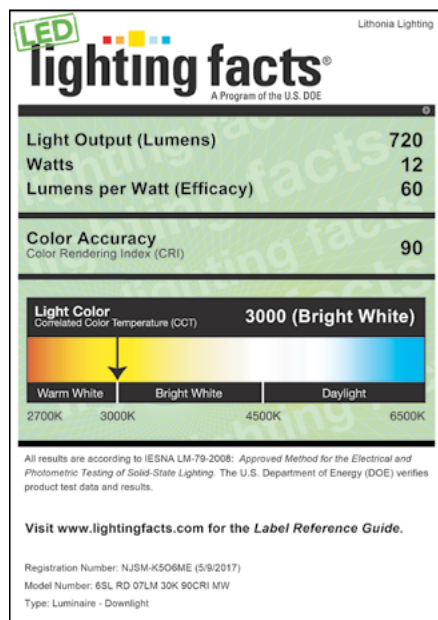

COMPATIBLE DIMMERS					
Manufacturer	Model Number	Type	Trim?	Style	Wattage
Lutron	DVCL-153P-WH	Triac	Yes	Decora	150
Lutron	AYCL-153P-WH	Triac	Yes	Toggle	150
Lutron	CTCL-153P-WH	Triac	Yes	Slider	150
Lutron	DVELV-300P	ELV	No	Decora	300
Lutron	300P SELV	ELV	No	Slider	300
Leviton	6633-PA	Triac	No	Slider	600
Pass & Seymour	HCL453PTCCCV6	Triac	Yes	Decora	450
Synergy/Leviton	ISD 600 I 120 / IPI06	Triac	No	Slider	600
Lutron	NTELV-300P	ELV	No	Slider	300
Leviton	6615-P	ELV	No	Slider	300
Synergy/Leviton	ISD 400 ELV 120 / IPE04	ELV	No	Slider	400
Sensorswitch	nSP5 PCD 2W	nLight	Yes	80/120	20/120
Sensorswitch	nSP5 PCD ELV 120	nLight	Yes	80/120	20/120