

R454b Refrigerant

SUBMITTAL DATA SHEET



Series Name: 4-Way Cassette Regular Series
Model Number: MCDHS-H36B-2A/MO1BU-H36B-2A

4-Way Cassette Regular System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



INDOOR SPECIFICATION

Indoor Air Flow (Turbo/H/M/L/Si) (CFM)	1042 / 948 / 854 / 753 / 659	
Indoor Noise Level (Turbo/H/M/L/Si) (dBA)	54 / 53 / 47 / 40 / 37	
Dimension (W×D×H)	inch	32-5/8 x 32-5/8 x 9-5/8
	mm	830 x 830 x 245
Package (W×D×H)	inch	35-7/8 x 35-7/8 x 11-3/8
	mm	910 x 910 x 290
Net/Gross Weight	lbs	59 / 71
	kg	26.9 / 32.4

OUTDOOR SPECIFICATION

Compressor Type	ROTARY	
Compressor Model	KTF310D43UMT	
Refrigerant	R454B	
Refrigerant Oil Charge(mL)	1,000	
Refrigerant Oil	VG74	
Outdoor Air Flow (Max) (CFM)	2,413	
Outdoor Noise Level (dBA)	63.0	
Dimension (W×D×H)	inch	37-1/4 x 16-1/8 x 31-7/8
	mm	946 x 410 x 810
Package (W×D×H)	inch	42-7/8 x 19-5/8 x 34-7/8
	mm	1090 x 500 x 885
Net/Gross Weight	lbs	152 / 162
	kg	69.1/73.7

EFFICIENCY

Cooling		Heating	
SEER2	20.0	HSPF2-4	10.3
EER2	9.6	COP	3.31

PERFORMANCE of Cooling

Cooling (Btu/hr)

Rated Capacity	36,000
Min/Max Capacity	6,400~39,800
Moisture Removal(L/h)	4.23
Standard Operating Range(*F/*C)	-13~122 (-25 ~ 50)
Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating

Heating (Btu/hr)

1. @ 47°F Rated	38,000
1. @ 47°F Min/Max Capacity	14,400~42,200
2. @ 17°F Rated	26,800
3. @ 5°F Rated: Capacity / COP	26,600/2.20
3. @ 5°F Max: Capacity	26,600
Standard Operating Range(*F/*C)	-13~75 (-25 ~ 24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

ELECTRICAL


Power Supply	208/230V,60Hz,1Ph
System MCA	33.0
Communication wiring	AWG 20/2
System MOCP	35.0
Compressor RLA	21.5
Outdoor Fan Motor RLA	1.4
Outdoor Fan Motor W	120
Indoor Fan Motor RLA	1.0
Indoor Fan Motor W	125
System Power Input @ Cooling (W)	3,720 (560 ~ 4,360)
System Power Input @ Heating (W)	3,365 (840 ~3,580)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

PIPING



Throttle type(Indoor)	N/A
Throttle type(Outdoor)	EXV+Throttle valve
Liquid Size	3/8" (9.52mm)
Gas Size	3/4" (19mm)
Max. Piping Length(ft/m)	246 (75)
Max. Height Difference(ft/m)	98 (30)
Max. Pre-charged Length(ft/m)	25 (7.5)
Refrigerant Pre-charged Amount(oz/kg)	92 (2.6)
Additional Charge of Refrigerant((oz/ft)/(g/m)	0.32 (30)
Connection Method	Flared

Indoor Unit Dimension

Unit: inch (mm)

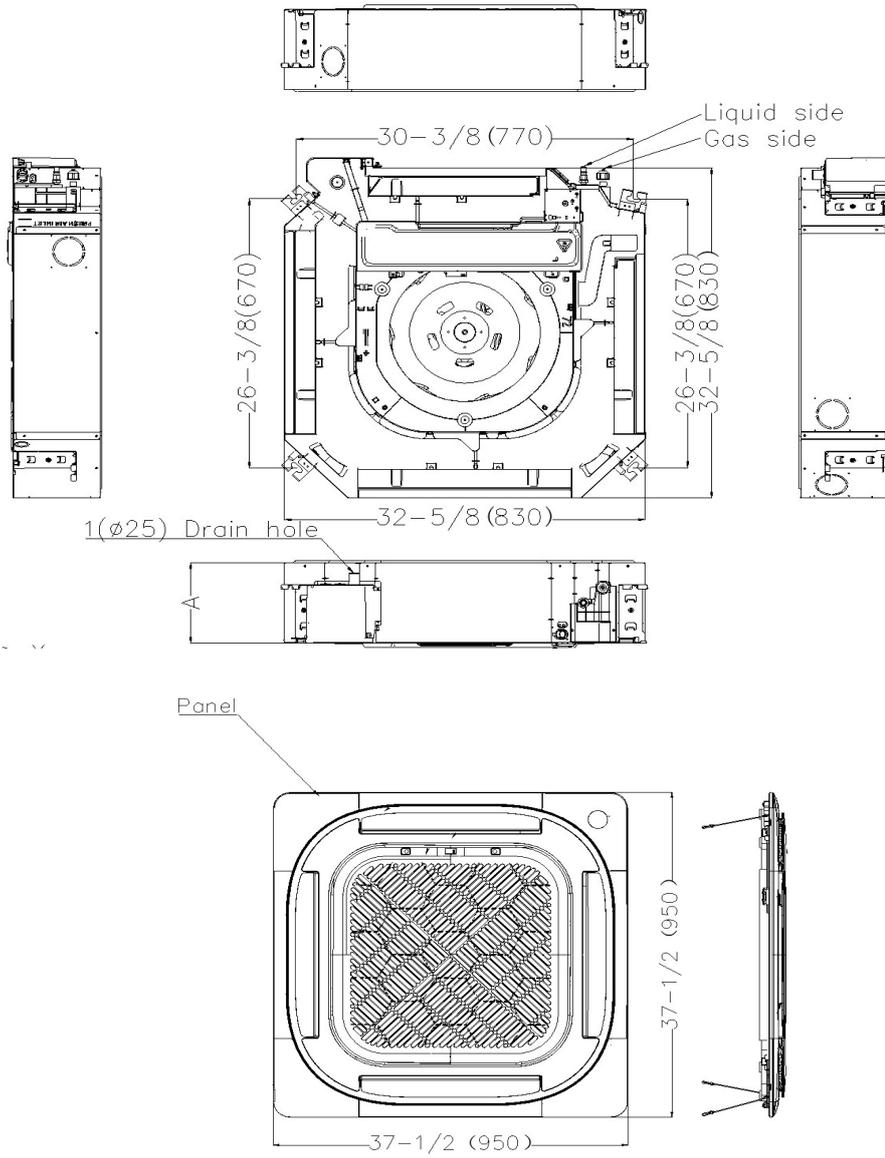

Installation Instruction

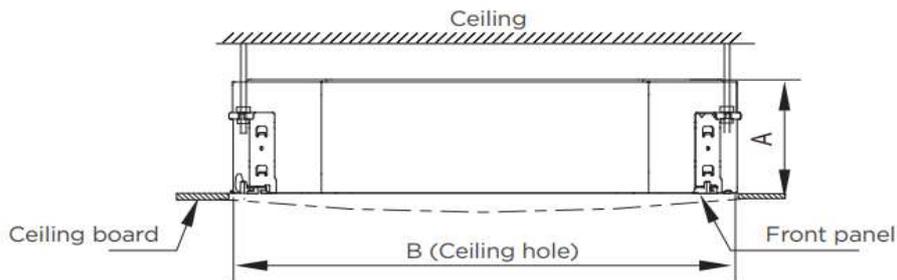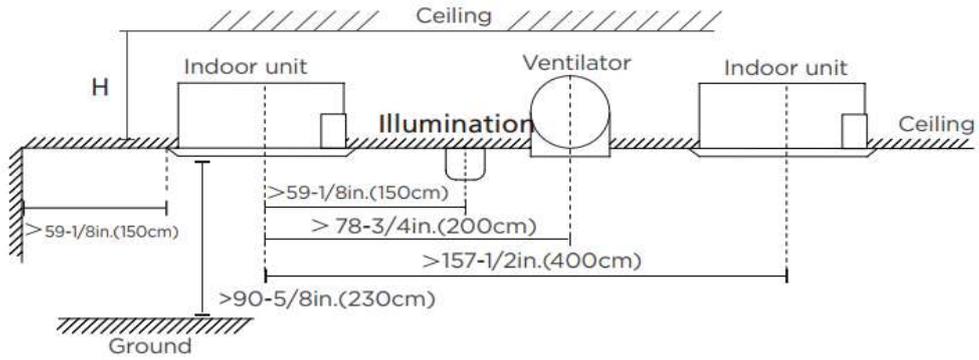


Distance from ceiling relative to height of indoor unit


MODEL	Length of A	Length of H	Length of B
9K/12K/18K	9-5/8 in. (245mm)	> 10-3/4 in. (275mm)	23-5/8 in. (600mm)
24K	8 in. (205mm)	9 in. (230mm)	35-3/8 in. (900mm)
36K	9-5/8 in. (245mm)	10-3/4 in. (271mm)	
48K	11-1/4 in. (287mm)	12-1/4 in. (313mm)	

Outdoor Unit Dimension

Unit: inch (mm)

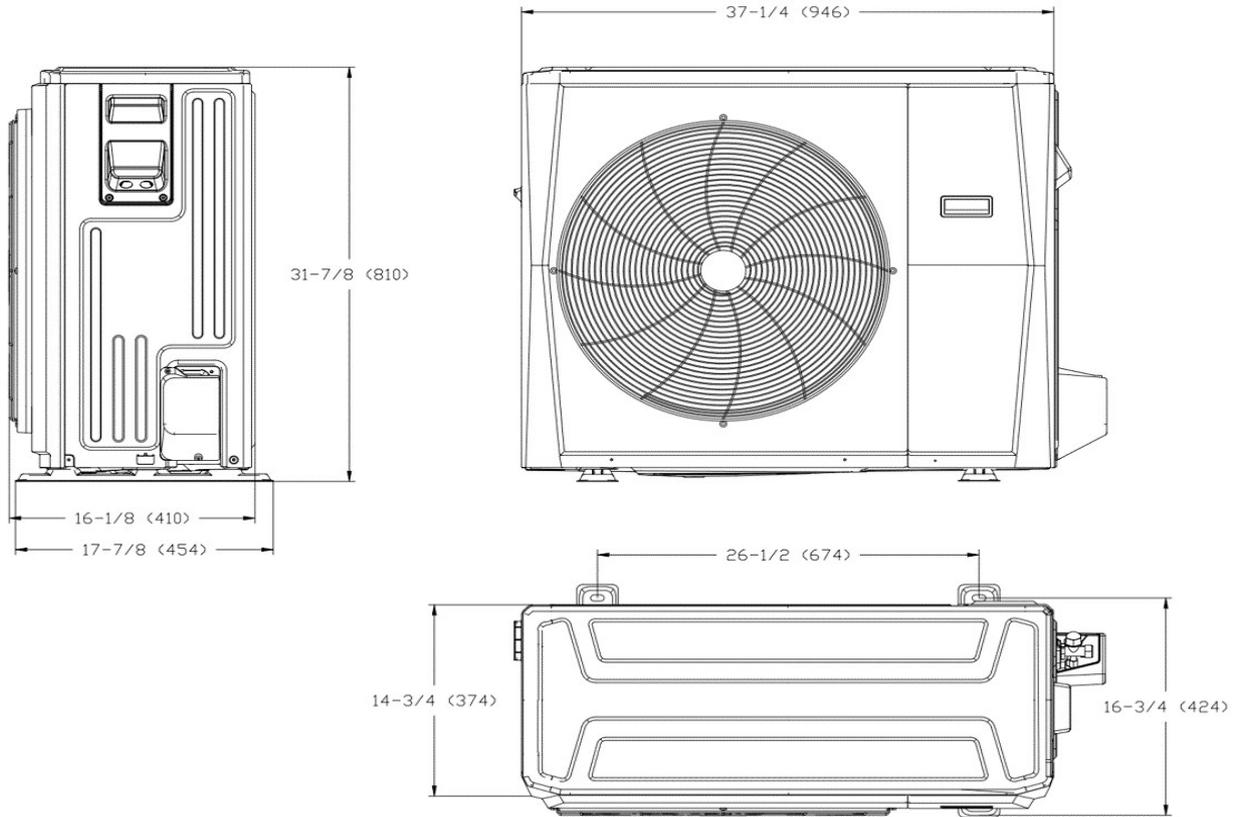

Installation Instruction

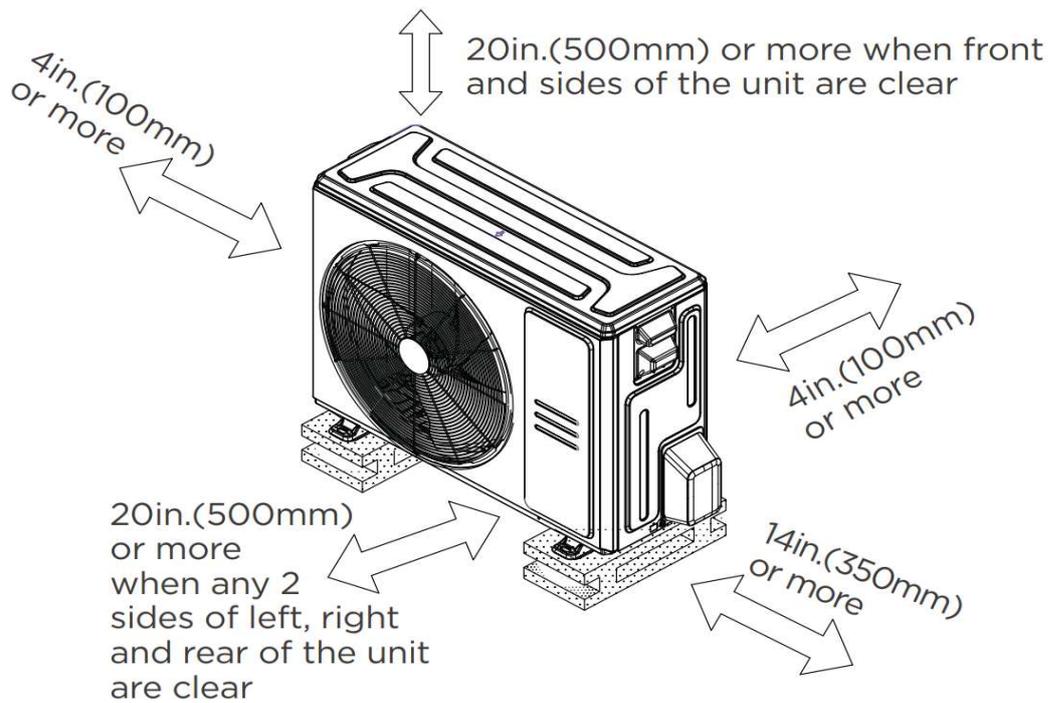

FEATURES

- 360° Air Flow
- Remote on-off and alarm ports
- Refrigerant leakage detection sensor(Optional)
- Humidity sensor
- Built-in pump
- 1~100% fan speed setting
- WiFi capability: through WiFi dongle or wired controller with built-in Wi-Fi
- OTA(by using WiFi dongle)
- 2-pin connector(HA/HB) for programmable wired controller
- Multiple control options available:
 - Two-way communication wired controller with built-in Wi-Fi:120N(X6W)
 - Wireless remote controller
 - Third-Party 24V Thermostat*

*24V interface is required.