

# R454b Refrigerant

# SUBMITTAL DATA SHEET



Series Name: Multi Zone Xtreme Heat Series  
Model Number: MO6HX-H48B-2A

### Multi Zone Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



### OUTDOOR SPECIFICATION

<b>Compressor Type</b>	TWIN-ROTARY	
<b>Compressor Model</b>	EKPQ440D1UMUB	
<b>Refrigerant</b>	R454B	
<b>Refrigerant Oil Charge(mL)</b>	1300	
<b>Refrigerant Oil</b>	VG75	
<b>Outdoor Air Flow (Max) (CFM)</b>	4503	
<b>Outdoor Noise Level (dBA)</b>	65	
<b>Dimension (W×D×H)</b>	inch	37-1/2 x 16-5/16 x 52-1/2
	mm	952 x 415 x 1333
<b>Package (W×D×H)</b>	inch	43-1/8 x 19-1/2 x 58-1/4
	mm	1095 x 495 x 1480
<b>Net/Gross Weight</b>	lbs	246 / 277
	kg	111.8 / 125.5

### ELECTRICAL

<b>Power Supply</b>	208/230V,60Hz,1Ph	
<b>System MCA</b>	43.0	
<b>Connection Wiring</b>	AWG 14/4	
<b>System MOCP</b>	45.0	
<b>Compressor RLA</b>	27	
<b>Outdoor Fan Motor RLA</b>	2.5	
<b>Outdoor Fan Motor W</b>	85	
<b>Indoor Fan Motor RLA</b>	/	
<b>Indoor Fan Motor W</b>	/	
<b>System Power Input @ Cooling (W)</b>	4,020 (800~5,700)	
<b>System Power Input @ Heating (W)</b>	4,000 (800~5,000)	
<b>MCA: Min. circuit amps (A)</b>	<b>MOCP: Max. over current protection (A)</b>	
<b>RLA: Rated load amps (A)</b>	<b>W: Fan motor rated output (W)</b>	

### EFFICIENCY

Cooling		Heating	
<b>SEER2</b>	20.4	<b>HSPF2-4</b>	11.0
<b>EER2</b>	11.7	<b>COP</b>	3.5

### PERFORMANCE of Cooling

Cooling (Btu/hr)	
<b>Rated Capacity</b>	47,000
<b>Min/Max Capacity</b>	12,000~57,000
<b>Moisture Removal(L/h)</b>	2.6
<b>Standard Operating Range(°F/°C)</b>	-22~122 (-30~50)
Rated Cooling Conditions:	Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

### PERFORMANCE of Heating


Heating (Btu/hr)	
<b>1. @ 47°F Rated</b>	48,000
<b>1. @ 47°F Min/Max Capacity</b>	13,000~60,000
<b>2. @ 17°F Rated(H32)</b>	44,500
<b>3. @ 5°F Rated: Capacity / COP(H42)</b>	48,000 / 2
<b>3. @ 5°F Max: Capacity</b>	48,000
<b>Standard Operating Range(°F/°C)</b>	-22~75 (-30~24)
1. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions:	Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

### PIPING

<b>Liquid Size</b>	6 x 1/4" (6 x 6.35 mm)
<b>Gas Size</b>	4 x 3/8"+2 x 1/2" (4 x 9.52 mm+2 x 12.7 mm)
<b>Max. Piping Length for all rooms(ft/m)</b>	262 (80)
<b>Max. Piping Length for one IDU(ft/m)</b>	115 (35)
<b>Max. Height Difference of IDU and ODU(ft/m)</b>	49 (15)
<b>Refrigerant Pre-charged Amount(oz/kg)</b>	152 (4.3)
<b>Refrigerant Precharge Length(ft/m)</b>	25 (7.5) x 6
<b>Additional Charge of Refrigerant (Φ6.35 (1/4") liquid pipe) ((oz/ft)/(g/m))</b>	0.16 (15)
<b>Additional Charge of Refrigerant (Φ9.52 (3/8") liquid pipe) ((oz/ft)/(g/m))</b>	0.32 (30)
<b>Connection Method</b>	Flared

### Outdoor Unit Dimension

Unit: inch (mm)

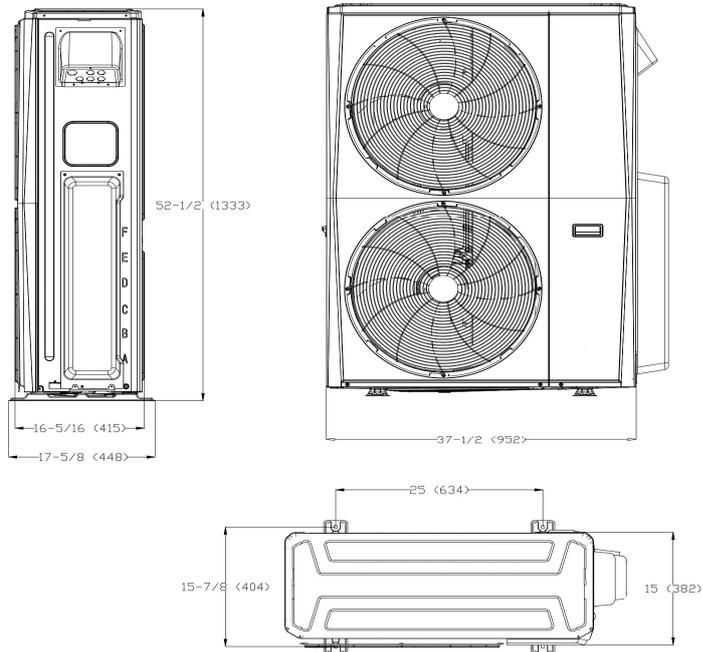

### Installation Instruction

