

R454b Refrigerant

SUBMITTAL DATA SHEET



Series Name: Multi Zone Xtreme Heat Series
Model Number: MO6HX-H48B-2A

Multi Zone Heat Pump System

Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:



OUTDOOR SPECIFICATION

Compressor Type	TWIN-ROTARY
Compressor Model	EKPQ440D1UMUB
Refrigerant	R454B
Refrigerant Oil Charge(mL)	1300
Refrigerant Oil	VG75
Outdoor Air Flow (Max) (CFM)	4503
Outdoor Noise Level (dBA)	65
Dimension (W×D×H)	inch 37-1/2 x 16-5/16 x 52-1/2
	mm 952 x 415 x 1333
Package (W×D×H)	inch 43-1/8 x 19-1/2 x 58-1/4
	mm 1095 x 495 x 1480
Net/Gross Weight	lbs 246 / 277
	kg 111.8 / 125.5

ELECTRICAL

Power Supply	208/230V,60Hz,1Ph
System MCA	43.0
Connection Wiring	AWG 14/4
System MOCP	45.0
Compressor RLA	27
Outdoor Fan Motor RLA	2.5
Outdoor Fan Motor W	85
Indoor Fan Motor RLA	/
Indoor Fan Motor W	/
System Power Input @ Cooling (W)	3,917 (800~5,400)
System Power Input @ Heating (W)	3,881 (800~5,200)
MCA: Min. circuit amps (A)	MOCP: Max. over current protection (A)
RLA: Rated load amps (A)	W: Fan motor rated output (W)

EFFICIENCY

Cooling	Heating
SEER2 23.0	HSPF2-4 11.0
EER2 12	COP 3.7

PERFORMANCE of Cooling

Cooling (Btu/hr)
Rated Capacity 47,000
Min/Max Capacity 12,000~57,000
Moisture Removal(L/h) 4.4
Standard Operating Range(°F/°C) -22~122 (-30~50)
Rated Cooling Conditions: Indoor: 80°F DB/67°F WB Outdoor: 95°F DB/75°F WB

PERFORMANCE of Heating


Heating (Btu/hr)
1. @ 47°F Rated 49,000
1. @ 47°F Min/Max Capacity 13,000~57,000
2. @ 17°F Rated(H32) 44,000
3. @ 5°F Rated: Capacity / COP(H42) 47,000 / 2
3. @ 5°F Max: Capacity 47,000
Standard Operating Range(°F/°C) -22~75 (-30~24)
1. Conditions: Indoor: 70°F DB/60°F WB Outdoor: 47°F DB/43°F WB
2. Conditions: Indoor: 70°F DB/60°F WB Outdoor: 17°F DB/15°F WB
3. Conditions: Indoor: 70°F DB/60°F WB Outdoor: 5°F DB/5°F WB

PIPING

Liquid Size	6 x 1/4" (6 x 6.35 mm)
Gas Size	4 x 3/8"+2 x 1/2" (4 x 9.52 mm+2 x 12.7 mm)
Max. Piping Length for all rooms(ft/m)	262 (80)
Max. Piping Length for one IDU(ft/m)	115 (35)
Max. Height Difference of IDU and ODU(ft/m)	49 (15)
Refrigerant Pre-charged Amount(oz/kg)	152 (4.3)
Refrigerant Precharge Length(ft/m)	25 (7.5) x 6
Additional Charge of Refrigerant (Φ6.35 (1/4") liquid pipe) ((oz/ft)/(g/m))	0.16 (15)
Additional Charge of Refrigerant (Φ9.52 (3/8") liquid pipe) ((oz/ft)/(g/m))	0.32 (30)
Connection Method	Flared

Outdoor Unit Dimension

Unit: inch (mm)

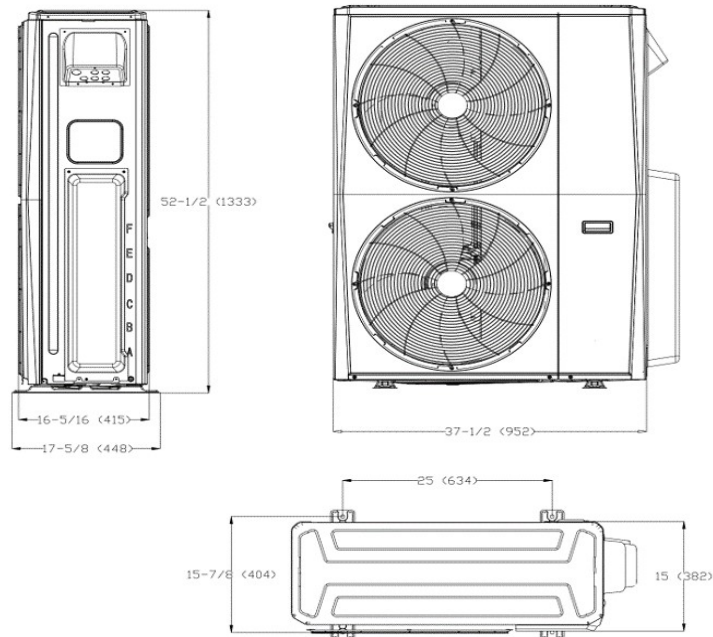

Installation Instruction

